




100%

# Recommended protection height: 200 mm or 350 mm.

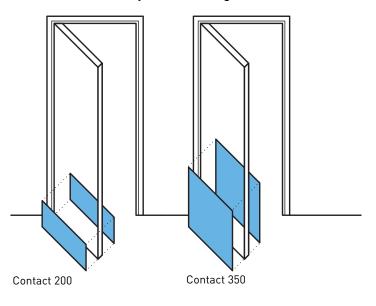

## Description

- Model: Contact 350 and 200 adhesive protection plates
- Section depth: 350 or 200 mm
- Thickness: 2.5 mm
- Length: 4 m
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: Smooth with decorative grooves
- Fixing: Adhesive foam strips reinforced with Gerflor universal mastic glue
- Colours: 31 standard for Contact 200 and 15 for Contact 350.

#### Specification

• Description: Adhesive protection plates (Contact 350 or 200 as manufactured by Gerflor) from smooth and antibacterial PVC with a depth of 350 or 200 mm, 2.5 mm thick. PVC profiles achieving Bs2d0 fire rating, feature solid colour and smooth surface finish with decorative grooves. A protective film is specified to minimise cleaning before acceptance. Sections are delivered with 2 or 3 strips of adhesive foam for fixing. • Environment: No heavy metals and no substance potentially subjected to any **REACH** restriction are used

in its manufacture, nor PBT/ PBA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the french regulation (23 march 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable. • Colour: Selected by architects

from manufacturer's standard range.

• Installation method: Adhesive. Gerflor universal mastic glue is recommended for stronger fixing.

Specification and drawings can be downloaded from our website www.gerflor.com

# PLAC'INOX STAINLESS STEEL PROTECTION PLATE

### Please refer to page 53.

0