




ATTRACTION

 Compact	Removable	Protectsol® 2	FloorScore®	NEVER WAX EASY MAINTENANCE
---	-----------	---------------	-------------	--------------------------------------


ATTRACTION is a 3/16" (5mm) colored, multilayered, interlocking resilient tile featuring dovetail joints making it ideal for quick renovations over existing subfloors such as concrete, VCT, ceramic tiles and asbestos tiles. It's product construction includes a 40 mil (1 mm) wearlayer made with 100% pure colored vinyl chips pressed at high pressure, double fiberglass grids that surround the interlayer on a thick 100% recycled backing. Attraction also features the revolutionary Protectsol® 2 surface treatment providing the best stain resistance including permanent marker and provides a no wax easy maintenance protocol.

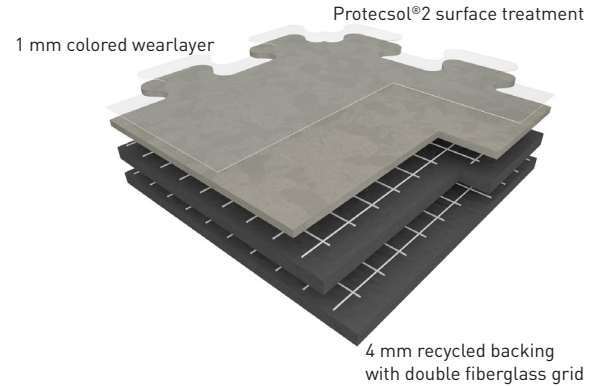


CONTRIBUTES TO A SUSTAINABLE ENVIRONMENT

- ▶ 100% REACH compliant
- ▶ 80% Recycled Content
- ▶ Extremely low VOC and allergen-free
- ▶ FloorScore® Certified


ATTRACTION
NEOPOLIS DESIGN




2740 HARLEM
SOFT




2741 BROOKLYN




2742 TIME SQUARE



2743 CENTRAL
PARK




2744 QUEENS SOFT




2745 PLAZA

ATTRACTION
BRAZILIA DESIGN



3707 PARAIBA



3709 CEARA



4342 JUARA



8157 GOIAS



8386 BOA VISTA




8577 AMAZONAS




8736 RECIFE


ATTRACTION
INDIANA DESIGN




4003 TAO




4004 PAGO




4146 MOHELI




4343 TOKELAU



4476 WATTARU



8053 ANAMBAS



8837 SONGO

ATTRACTION
OSMOZ DESIGN



4351 GREIGE

ATTRACTION



DESCRIPTION	STANDARDS	REQUIREMENTS	ATTRACTION
PRODUCT DESCRIPTION			Unique multilayered dovetailed tile made for quick renovations over existing floors such as VCT
Surface Treatment			ProtecSol®2
Wearlayer Thickness			100% pure colored vinyl chip pressed wearlayer
Tile Size			25" x 25" (635mm x 635mm)
Total Thickness	ASTM F386		3/16" (5mm)
Weight	EN 430		1.53 lbs/sqf (7460 g/m2)
PERFORMANCE			
Static Load (250 PSI)	ASTM F970	<-0.005"	Meets Requirements
Slip Resistance	DIN 51 130	Class	R10
Indentation Hardness	ASTM D2240	-	95
Coefficient of Friction	ASTM D2047	-	0.68 (Dry)
Castor Chair Test	ISO 4918 (EN 425)		OK
Chemical Stain Resistance	ASTM F925		Excellent
Fire Rating	ASTM E648		Class 1
ENVIRONMENT HEALTH & SAFETY			
Allergen-Free			100% Allergen-Free
Production Waste			100% Manufacturing waste recycled
Plant Certifications	ISO 14001, ISO 9001		Certified
End of Life			100% Recyclable
MATERIALS & RESOURCES (MR): BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BPDO)			
Sourcing of Raw Materials: Recycled Content	LEED v3 c4 & v4 MR BPDO	Contributes	80%
Sourcing of Raw Materials: Restriction Use of Harmful Chemicals	LEED v4 MR BPDO	Contributes	100% REACH compliant
INDOOR ENVIRONMENTAL QUALITY (IEQ)			
Low Emitting Materials	IEQ 4.3 LEED v3 IEQ c4.3 & v4IEQ	Contributes	FloorScore® Certified
TVOC after 28 days	ISO 16000-6		<10 µg/m ³
WARRANTY	10-year limited commercial warranty when installed in accordance with Gerflor's USA installation instructions on gerflorusa.com		



NO heavy metals,
CMR 1, or CMR 2