



CREATION

LIVING

Gerflor[®]
theflooringgroup

CREATION LIVING

ASTM
F1700

12 mil




PUR+ Matte

FloorScore®

33dB-60dB

Gerflor's Creation Living LVT is a 0.080" (2 mm) thick, luxury vinyl tile with a 12 mil transparent wearlayer and micro-beveled edges. Realistic wood designs are printed in high-definition on tear-resistant film and supported by a compact backing made of 100% recycled materials. Creation Living features eight embossings, including three exclusive registered embossings, and a new PUR+ Matte finish that eliminates the glare associated with resilient flooring, creating wood visuals that are more realistic than industry standards.

Creation Living is 100% resilient and provides better sound management properties than laminate or rigid-core flooring. When installed with the Gerflor SmartFix underlayer, Creation Living provides impact insulation class (IIC) attenuation up to 60 dB. It's the ideal solution for light commercial applications and living spaces such as student housing, hospitality, medical office buildings, senior living, office spaces and more.

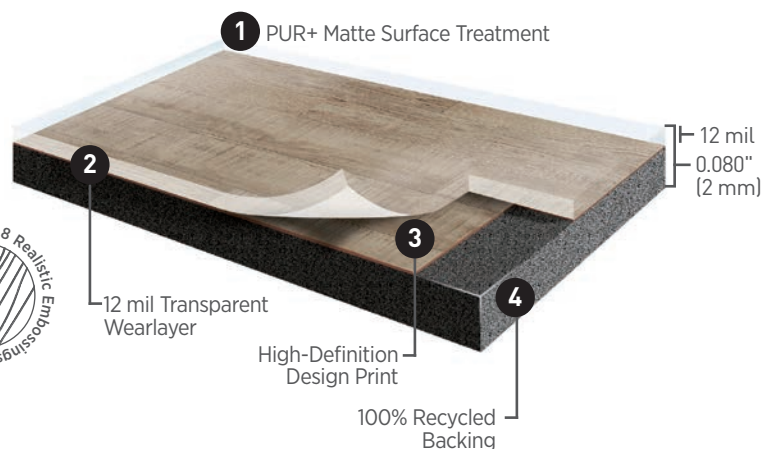

Creation Living is naturally bacteriostatic and 99% effective against the spread of infection by ISO 22196 standards. It is low VOC ($< 100\mu\text{g}/\text{m}^3$ after 28 days), 10 times lower than industry requirements. The PUR+ Matte polyurethane surface treatment allows for easy maintenance without waxing.





CREATION

LIVING



SMARTFIX

When Creation Living is installed with Gerflor SmartFix underlayer, the system achieves superior sound management properties. A 0.080" thick underlayer made of a textile backing, a flexible polyurethane mid layer with grid for dimensional stability and a peel and stick top layer, SmartFix delivers easy and fast installation.

- Sound Transmission Class (STC): 62dB
- Impact Insulation Class (IIC): 60dB
- Acoustic Impact Sound Insulation EN ISO 717-2: 16dB
- High moisture tolerance installation up to 95% RH when installed with Gerfix Spray:
 - Use Gerfix Spray, unroll the 0.080" thick SmartFix underlayer, peel off the self-adhesive layer, install the LVT.

Follow detailed installation guidelines at www.gerflorusa.com.


Sold by the Roll:

Size: 3' 3" x 24' 7" (1 m x 7.5 m)

Coverage: 80 ft² (7.5 m²) per roll



Thickness: 0.080" (2 mm) thick

Weight: 33 lbs per roll



ROOM VISUALIZER

View Creation LVT designs in room settings! Visit gerflorusa.com > **Design Tools** > **Room Visualizer**.

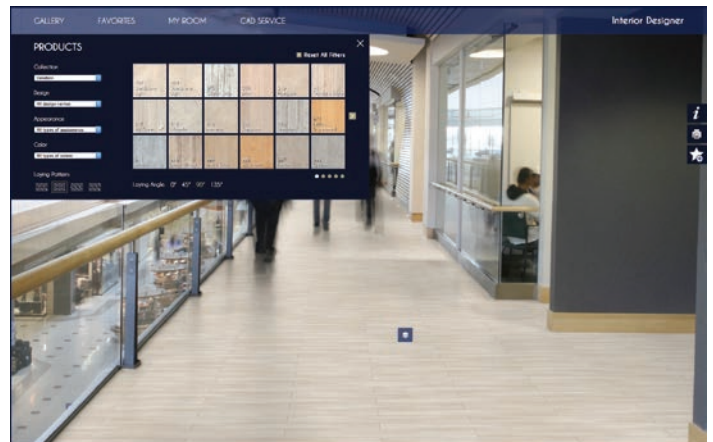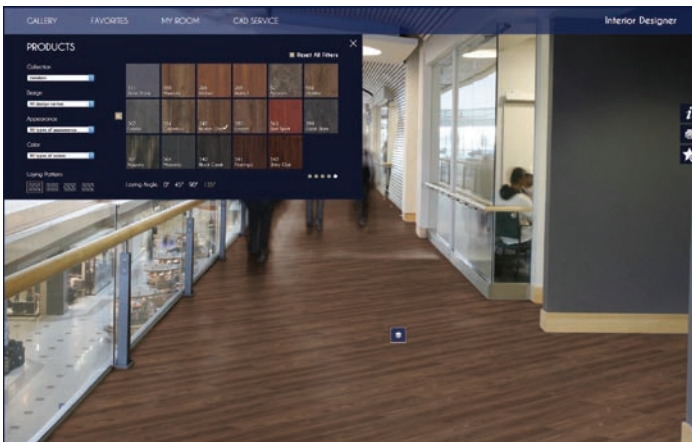

**LVT
Manufacturer**
Since 1985
3 LVT Factories

**Gerflor
Design Center**
Exclusive
Designs

**Visit
GerflorUSA.com**
For Stocking
Program

Gerflor®
theflooringgroup



DISCOVER ADDITIONAL DESIGNS IN
OUR CREATION LIVING LOOKBOOK



0811 CHEVRON BUCKWHEAT

 CHEVRON  7 1/4" x 48" 



0809 CHEVRON HURRICANE

 CHEVRON  7 1/4" x 48" 



0811 CHEVRON BUCKWHEAT



0809 CHEVRON HURRICANE



0740 ROYAL OAK COFFEE

ROYAL OAK

7 1/4" x 48"



0459 BROWNIE

NATURAL

7 1/4" x 48"



0859 QUARTET FAUVE

NATURAL

7 1/4" x 48"



0874 TIMBER GOLD

BRUSHED

7 1/4" x 48"



Designs also available in Creation Clic 22. Visit gerflorusa.com for specification and stocking program.



0459 BROWNIE



0740 ROYAL OAK COFFEE



0859 QUARTET FAUVE





0874 TIMBER GOLD





0847 SWISS OAK SMOKED



 NATURAL

 7 1/4" x 48" 



0738 ALAMO SAND



 ALAMO

 7 1/4" x 48" 




0447 AMADOR



 SAW EFFECT

 7 1/4" x 48" 



0846 SWISS OAK PEARL

 NATURAL


 7 1/4" x 48" 



Designs also available in Creation Clic 22. Visit gerflorusa.com for specification and stocking program.



0871 BOSTONIAN OAK

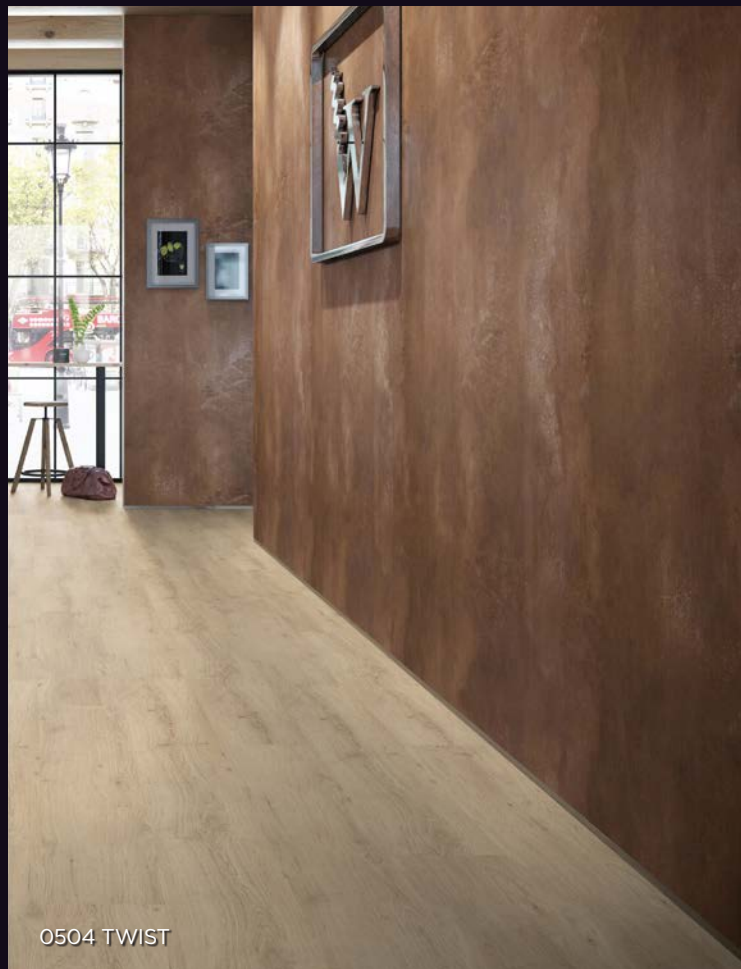

0504 TWIST



0503 QUARTET



0441 HONEY OAK



0503 QUARTET

○ NATURAL

7 1/4" x 48"



0871 BOSTONIAN OAK

○ NATURAL

7 1/4" x 48"



0441 HONEY OAK

○ NATURAL

7 1/4" x 48"



0504 TWIST

○ NATURAL


7 1/4" x 48"





Designs also available in Creation Clic 22. Visit gerflorusa.com for specification and stocking program.



0061 OXFORD



 BRUSHED

 7 1/4" x 48" 



0456 RANCH



 BRUSHED


 7 1/4" x 48" 



0853 BOSTONIAN OAK BEIGE



 NATURAL

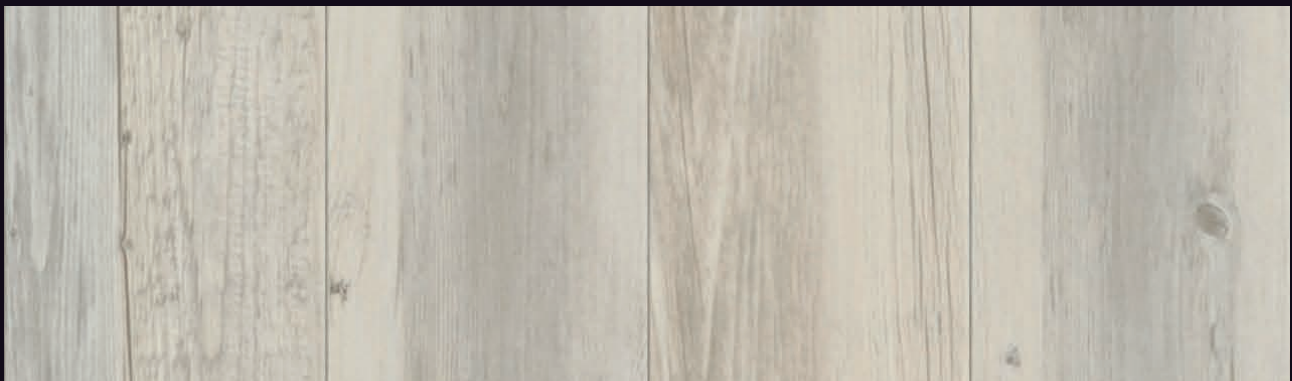 7 1/4" x 48" 



0448 MALUA BAY

 BRUSHED

 7 1/4" x 48" 



Designs also available in Creation Clic 22. Visit gerflorusa.com for specification and stocking program.



0456 RANCH



0448 MALUA BAY



0061 OXFORD



0853 BOSTONIAN OAK BEIGE

DESCRIPTION	STANDARDS	REQUIREMENTS	CREATION LIVING
PRODUCT DESCRIPTION			Micro-Beveled Luxury Vinyl Planks For Light Commercial Applications
Reference Specification	ASTM F1700	–	CLASS III TYPE B
Surface Treatment / Maintenance	–	–	PUR+ MATTE
Backing	ASTM F1303	–	100% Made From Recycled Material
Gauge Total Thickness	ASTM F386	–	0.080" (2.0 mm)
Wearlayer Thickness	ASTM F410	–	12 mil (0.3 mm)
Plank size	–	–	7 1/4" x 48"
Weight	–	–	0.7 lbs/sqf (3.46 kg/sqm)
Packaging	–	–	15 planks/box = 36 sqf (3.36 sqm) Chevron: 14 planks/box = 33.8 sqf (3.14 sqm)
PERFORMANCE			
Indentation – Residual (75 lbs)	ASTM 1914	≤ -8%	Meets Requirements
Static Load (250 psi)	ASTM F970	≤ 0.005 in.	Meets Requirements
Coefficient of Friction	ASTM D2047	–	0.65 (Dry)
Impact Insulation Class (IIC) / SmartFix	ASTM E90 (ASTM E492)	–	33 dB / 60 dB (with SmartFix)
Chemical & Stain Resistance (5 min and 24 hours)	ASTM F925	–	Meets Requirements
Fire Rating	ASTM E648	Class 1	Class 1
	CAN/ULC S102.2	–	Tested in Accordance
Smoke Density (Flaming and Non-Flaming)	ASTM E662	–	Meets Requirements
ENVIRONMENT HEALTH & SAFETY			
Naturally Bacteriostatic; Combats MRSA, E. Coli, and S. Aureus*	ISO 22196	–	Inhibits Spread of Infections at 99%
Allergen Free	–	–	100% Allergen Free
Plant Certifications	–	–	ISO 14001, ISO 9001
Production Waste	–	–	100% Manufacturing Waste Recycled
End of Life	–	–	100% Recyclable
MATERIALS & RESOURCES: BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BPDO)			
Sourcing of Raw Materials: Recycled Content	MR 4 LEED v3 or Sourcing LEED v4	–	35%
Restriction Use of Harmful Chemicals	Materials LEED v4	–	100% REACH Compliant
Environmental Product Declaration (EPD)	EPD LEED v4	–	Available Upon Request
Health Product Declaration (HPD)	Materials LEED v4	–	Self Declared
MATERIALS & RESOURCES: INDOOR ENVIRONMENTAL QUALITY (IEQ)			
VOC After 28 Days	ISO 16000-6	–	<100 µg/m ³
Indoor Air Quality / Low Emitting Materials	IEQ 4.3 LEED v3 IEQ Option 1 LEED v4	–	FloorScore® Certified
INSTALLATION METHOD			
Full Spread Gerfix TPS+ Adhesive		Up to 95% RH	
Gerfix LVT & Plank Spray		Up to 95% RH	
SmartFix Underlayment and Gerfix LVT & Plank Spray		Up to 95% RH	
WARRANTY		10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on www.gerflorusa.com .	

*The implementation of an effective cleaning method is the best defense against the spread of infections.

CREATION LIVING: ACTIONS SPEAK LOUDER THAN WORDS



WELLNESS

- Naturally bacteriostatic to limit the spread of infections, ISO 22196 certified
- Sound management properties
- Walking comfort



INDOOR AIR QUALITY

- Low VOC emissions- less than 100 µg/m³; 10 times lower than industry requirements
- FloorScore® Certified
- No wax finish; No need for additional chemicals



LIFE CYCLE ANALYSIS

- EPD available
- Made in ISO 14001 and 9001 certified manufacturing facility



RAW MATERIALS

- 100% REACH compliant
- Phthalates free (except recycled content)
- NO formaldehyde, NO heavy metals, NO solvents



RECYCLED CONTENT

- 35% pre-consumer recycled content
- Recycled content is 100% REACH compliant



NO heavy metals,
CMR 1, or CMR 2