




CREATION LIVING



GERFLOR USA'S CREATION LIVING LVT is a 2mm thick, light commercial luxury vinyl tile with mirco-beveled edges, available in both plank and tile format. Realistic wood and stone designs are printed in high definition on tear-resistant film, protected by a 12 mil transparent wearlayer, and supported by a compact backing made of 100% recycled materials. Creation Living is naturally bacteriostatic and 99% effective by ISO 22196 standards to inhibit the spread of infection. The PUR+ Matte Surface Treatment allows for easy maintenance without waxing.

Creation Living is low VOC (TVOC after 28day<100µg/m3), 100% allergen-free, and REACH compliant.

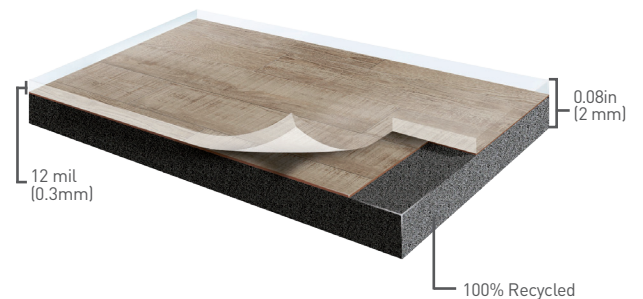


SMARTFIX

Request Gerflor SmartFix Underlayer to achieve superior sound management properties up to 60dB (IIC).

Sold by the Roll:

Size: 3' 3" x 24' 7" (1 m x 7.5 m)
Coverage: 80 ft² (7.5 m²) per roll
Thickness: 0.080" (2 mm) thick
Weight: 33 lbs per roll



Visit gerflorusa.com for installation instructions.


PLANKS



0811 CHEVRON BUCKWHEAT



0809 CHEVRON HURRICANE

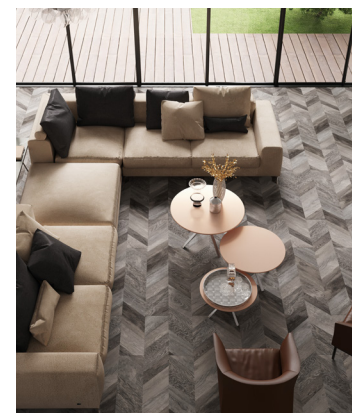

PLANKS



0737 ALAMO ASH



0456 RANCH



0447 AMADOR



0738 ALAMO SAND



0871
BOSTONIAN OAK



0741 TIMBER RUST



0347
BALLERINA



0441 HONEY OAK



0448 MALUA BAY



0742 TIMBER
CAMEL



0740 ROYAL OAK
COFFEE



0739 ROYAL OAK
GOLD



0459 BROWNIE



0504 TWIST



0503 QUARTET



0859 QUARTET
FAUVE



0874 TIMBER GOLD



0061 OXFORD



0853 BOSTONIAN
OAK BEIGE



0847 SWISS
OAK SMOKED



0846 SWISS
OAK PEARL




0742 TIMBER
CAMEL



0741 TIMBER RUST

TILES



0744 CARRARE




0751 DURANGO
TAUPE



0373 SILVER CITY



0746
PASHMINA STORM



0864 CEMENTINE
DENIM



0865 CEMENTINE
BUCKSKIN

CREATION LIVING



DESCRIPTION	STANDARDS	REQUIREMENTS	CREATION LIVING
PRODUCT DESCRIPTION			Micro-Beveled Luxury Vinyl Planks For Light Commercial Applications
Reference Specification	ASTM F1700	-	CLASS III TYPE B
Surface Treatment / Maintenance	-	-	PUR+ MATTE
Backing	ASTM F1303	-	100% Made From Recycled Material
Gauge Total Thickness	ASTM F386	-	0.080" [2.0 mm]
Wearlayer Thickness	ASTM F410	-	12 mil [0.3 mm]
Plank Size	-	-	7 1/4" x 48"; 24" x 24"; 18" x 36"
Weight	-	-	0.7 lbs/sqf [3.46 kg/sqm]
PERFORMANCE			
Indentation – Residual (75 lbs)	ASTM 1914	≤ -8%	Meets Requirements
Static Load (250 psi)	ASTM F970	≤ 0.005 in.	Meets Requirements
Coefficient of Friction	ASTM D2047	-	0.65 [Dry]
Impact Insulation Class (IIC) / SmartFix	ASTM E989 (ASTM E492)	-	33 dB / 60 dB [with SmartFix]
Chemical & Stain Resistance (5 min and 24 hours)	ASTM F925	-	Meets Requirements
Fire Rating	ASTM E648	Class 1	Class 1
	CAN/ULC S102.2	-	Tested in Accordance
Smoke Density (Flaming and Non-Flaming)	ASTM E662	-	Meets Requirements
ENVIRONMENT HEALTH & SAFETY			
Naturally Bacteriostatic; Combats MRSA, E. Coli, and S. Aureus*	ISO 22196	-	Inhibits Spread of Infections at 99%
Allergen Free	-	-	100% Allergen Free
Plant Certifications	-	-	ISO 14001, ISO 9001
Production Waste	-	-	100% Manufacturing Waste Recycled
End of Life	-	-	100% Recyclable
MATERIALS & RESOURCES: BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BPDO)			
Sourcing of Raw Materials: Recycled Content	MR 4 LEED v3 or Sourcing LEED v4	-	35%
Restriction Use of Harmful Chemicals	Materials LEED v4	-	100% REACH Compliant
Environmental Product Declaration (EPD)	EPD LEED v4	-	Available Upon Request
Health Product Declaration (HPD)	Materials LEED v4	-	Self Declared
MATERIALS & RESOURCES: INDOOR ENVIRONMENTAL QUALITY (IEQ)			
TVOC After 28 days	ISO 16000-6	-	<100 µg/m ³
Indoor Air Quality / Low Emitting Materials	IEQ 4.3 LEED v3 IEQ Option 1 LEED v4	-	FloorScore® Certified
INSTALLATION METHOD			
Full Spread Gerfix TPS+ Adhesive			Up to 95% RH
Gerfix LVT & Plank Spray			Up to 95% RH
SmartFix Underlayment and Gerfix LVT & Plank Spray			Up to 95% RH
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on www.gerflorusa.com .		

*The implementation of an effective cleaning method is the best defense against the spread of infections.

FORMAT OF PLANKS / TILES		NUMBER OF UNITS PER BOX	COVERAGE PER BOX		WEIGHT / BOX	
CM	INCH		SQ M	SQ FT	KG	LBS
18.4 x 121.9	7 1/4" x 48"	15	3.36	36	11.6	25.6
18.4 x 121.8 Chevron	7 1/4" x 48"	14	3.14	33.8	10.9	28.7
61 x 61	24" x 24"	9	3.35	36	11.6	25.5
45.7 x 91.4	18" x 36"	9	3.76	40.47	13	28.8

