

# SHOWER SYSTEM

[gerflor.com](http://gerflor.com)



**Gerflor**<sup>®</sup>  
theflooringgroup

# SHOWER SYSTEM



**HYGIENE AND EASIER  
MAINTENANCE**



**DECORATIVE PRODUCTS**



**DURABLE AND  
WATERPROOF  
INSTALLATION**



**SAFETY FOR PATIENTS,  
RESIDENTS  
AND EMPLOYEES**



**ECO-FRIENDLY SOLUTION**

## **PRESENTATION OF THE RANGE \_\_\_\_\_ P. 4**

► A COMPLETE SOLUTION \_\_\_\_\_ p. 4

► BENEFITS OF THE SYSTEM \_\_\_\_\_ p. 8

► COLOR RANGE \_\_\_\_\_ p. 10

## **TECHNICAL SOLUTION & ACCESSORIES \_\_\_\_\_ P. 31**

► TECHNICAL INFORMATION ON COLORS \_\_\_\_\_ p. 31

► ACCESSORIES \_\_\_\_\_ p. 32

► SPECIFIC TOOLS \_\_\_\_\_ p. 34

► MAINTENANCE \_\_\_\_\_ p. 40

► PRODUCT DESCRIPTION \_\_\_\_\_ p. 42

► TECHNICAL DATASHEET \_\_\_\_\_ p. 44

## **SERVICES - ENVIRONMENT \_\_\_\_\_ P. 46**

► AN ECO-FRIENDLY SOLUTION \_\_\_\_\_ p. 48

FOR INSTALLATION GUIDELINES, PLEASE CHECK GERFLOR.COM

# FLOORINGS

# WALL COVERING

A COMPLETE SOLUTION FOR WET AREAS




**MURAL CALYPSO**  
7002 Bamboo Lotus



**MURAL CALYPSO**  
7744 Nordic Milk




**MURAL CALYPSO**  
7740 Fabric Silk

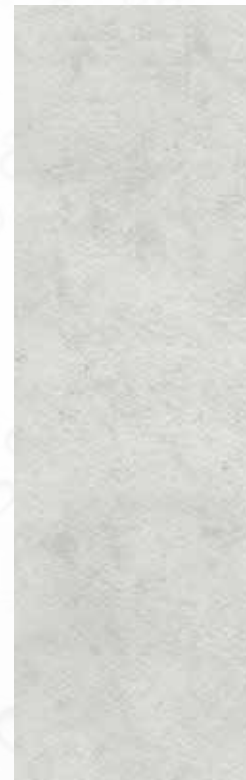

**MURAL CALYPSO**  
7721 Manhattan Mist



**MURAL CALYPSO**  
7003 Prism Ice

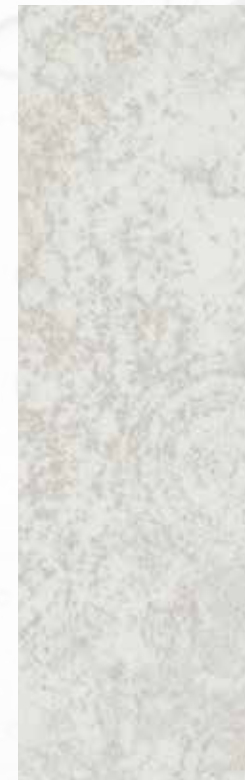

**MURAL CALYPSO**  
7008 Fossil Ice



**MURAL CALYPSO**  
7006 Blossom Haze Pearl




**ELEGANCE SD**  
0322 Jicama




**TARASAFE STANDARD**  
7618 Edelweiss



**TARASAFE STANDARD**  
7312 Dune

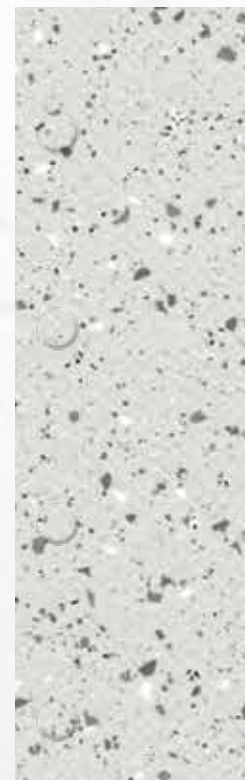

**TARASAFE ULTRA H2O**  
7720 Iceberg

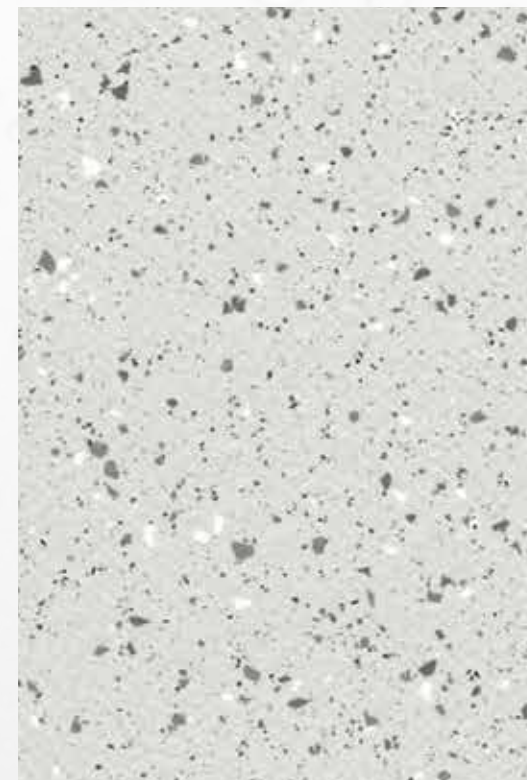

**TARASAFE ULTRA**  
8701 Opal

IDEAL FOR ALL APPLICATIONS



STUDENT  
ACCOMMODATION



HOTELS



ELDERLY  
PEOPLE  
HOME



LOCKERS

# BENEFITS OF THE SYSTEM



## SAFETY FOR PATIENTS, RESIDENTS AND EMPLOYEES

- Compliance with barefoot and shod slip resistance norms (DIN 51 097, DIN 51 130 and EN 13845)
- Compliance with most “access to all” laws (shower without tray)
- Compliance with fire norm EN 13501 and regulations for floorings and wall covering (B-s2,d0)



## HYGIENE AND EASIER MAINTENANCE

- Smooth and washable products
- Cove former and Gerflor Corner System for easier maintenance in angles: avoids pools of water forming
- Easy and economical maintenance
- Surface treatment on Tarasafe Ultra/Standard/Geo



## DECORATIVE PRODUCTS

- Attractive range of colors which enables more than **1600 combinations** between floors / wall to create calm, warm, Zen or light ambiances!
- Possibility to compose tone on tone surfaces without strong break between two floors especially for Alzheimer units thanks to the 3 colors of threshold
- Colour throughout the thickness for Mural Calypso to ensure a nice aspect of the welding (no white marks)



## DURABLE AND WATERPROOF INSTALLATION

- Complete solution with flooring-wall covering-accessories for a **100% waterproof** installation
- Hot welding on floor and wall coverings
- Floorings: 2 types of products > heterogeneous or homogeneous
- Vertical or horizontal installation for Mural Calypso
- Gerflor corner system for durability



## ECO-FRIENDLY SOLUTION

- 100% recyclable products
- Products manufactured in Europe in ISO 14001 certified factories
- Up to 50% of mineral or renewable material
- Recycled raw material 100% REACH compliant
- Low VOC emissions

Mural Calypso



7744 Nordic Milk

Mural Calypso




7740 Fabric Silk

Mural Calypso




7714 Frost

Mural Calypso

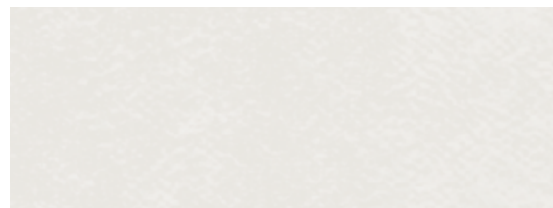

7711 Ice

Mural Calypso

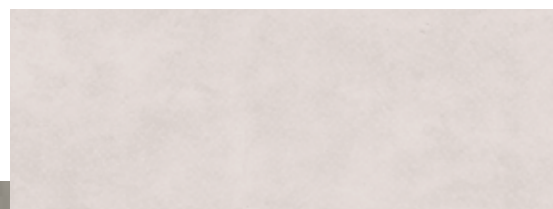

7715 Crystal

Mural Calypso



7002 Bamboo Lotus

Mural Calypso



7309 Lotus

Mural Calypso



7311 Linen

Mural Calypso



7712 Shadow

Elegance SD



0322 Jicama

Tarasafe Standard




7312 Dune

Tarasafe Standard



7618 Edelweiss


Tarasafe Ultra



7384 Citrine



Tarasafe Ultra




8013 Jasper

Elegance SD



0329 Hazelnut

Tarasafe Standard

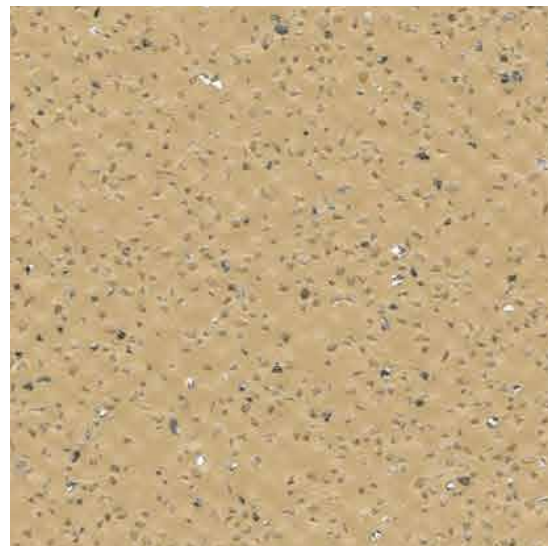

7302 Sahara

WALL COVERING: MURAL CALYPSO  
FLOORING: TARALAY SÉCURITÉ

Mural Calypso




7006 Blossom Haze Pearl

Mural Calypso



7000 Bamboo Snow Pearl

Mural Calypso

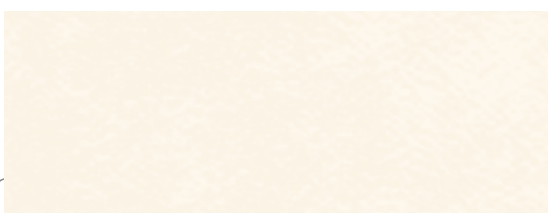

7611 Snow

Tarasafe Standard




7731 Marbre

Elegance SD



0705 Patisson

Tarasafe Ultra



8701 Opal

**H<sub>2</sub>O** Tarasafe Ultra H2O - 7720 Iceberg

Mural Calypso



7005 Blossom Snow Pearl



WALL COVERING: BAMBOO SNOW PEARL  
FLOORING: ELEGANCE SD JICAMA

Mural Calypso




7736 Fabric Wool

Mural Calypso



7753 Nordic Zen

Tarasafe Ultra

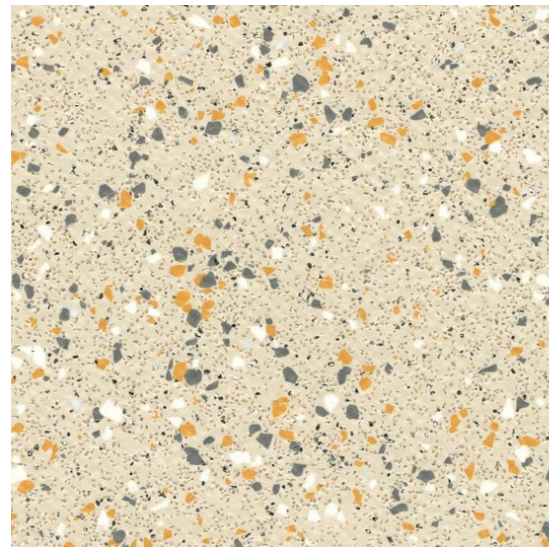

7383 Diopside

**H<sub>2</sub>O** Tarasafe Ultra H2O - 7325 Seashore

Tarasafe Standard



7386 Savana

**H<sub>2</sub>O**

Presentation of the range

Mural Calypso



7004 Prism Haze Pearl

Mural Calypso



7003 Prism Ice

Mural Calypso



7001 Bamboo Haze Pearl


WALL COVERING: PRISM HAZE PEARL

Mural Calypso



7721 Manhattan Mist

Mural Calypso

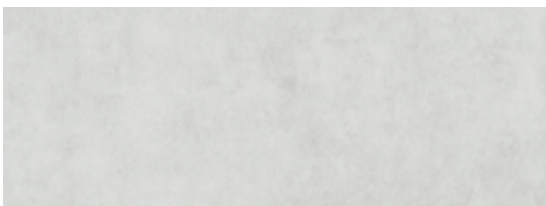

7010 Haze

Mural Calypso



7728 Manhattan Stone

Mural Calypso



7008 Fossil Ice

Mural Calypso




7009 Fossil Haze

Mural Calypso




7734 Manhattan Concrete

Elegance SD

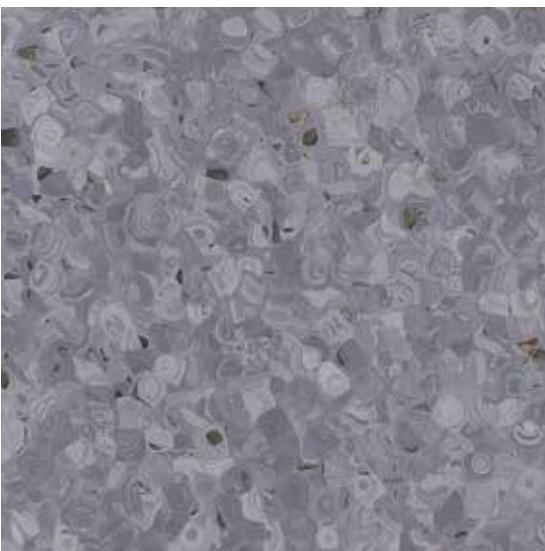

0704 Raspberry Grey

Tarasafe Ultra



8709 Granite


H<sub>2</sub>O

Tarasafe Ultra



8710 Basalt

Tarasafe Ultra



8704 Pebble

Tarasafe Standard




7773 Storm

Tarasafe Standard



7801 Noir


Tarasafe Ultra



8717 Obsidian

H<sub>2</sub>O


Tarasafe Standard

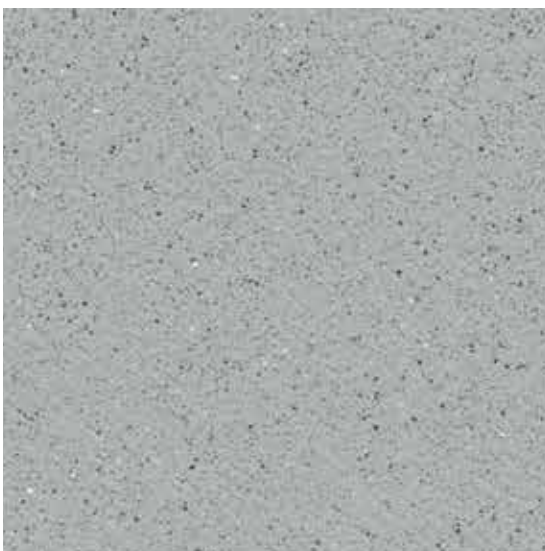

7767 Dove Grey




7007 Blossom Lichen

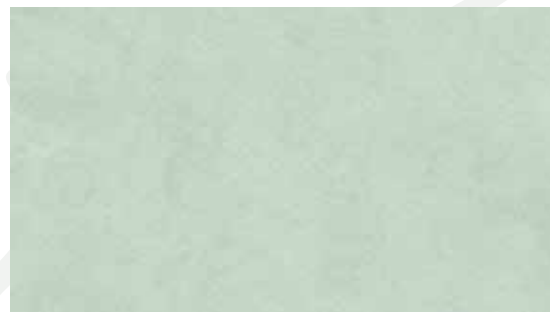


7011 Lichen




7508 Avocado




4508 Jade




4505 Peridot




4460 Topaz



4463 Aqua

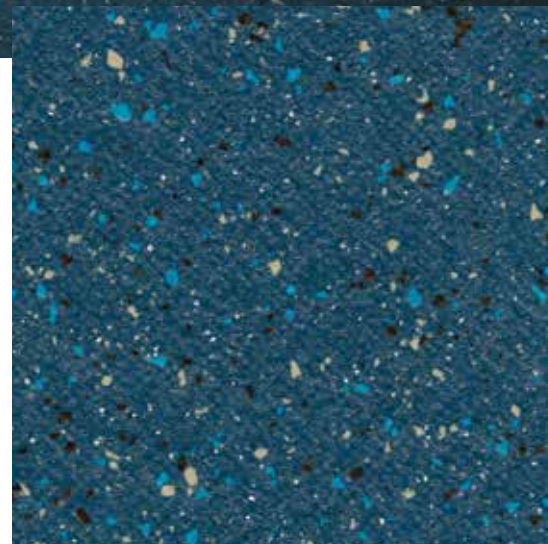

4472 Moonstone



4470 Sapphire



7709 Royal Blue



Tarasafe Ultra H2O - 7418 Marine / 7413 Ocean Blue



7408 Skyline



7414 Fabric Denim



7012 Breeze




7704 Sky Blue




0341 Bilberry



7438 Baleine




7482 Halite



4465 Cobalt




Mural Calypso

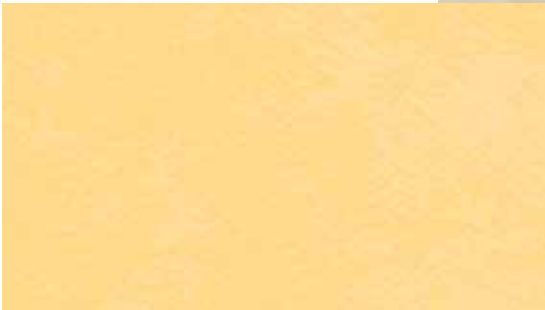

7201 Moonlight

Mural Calypso

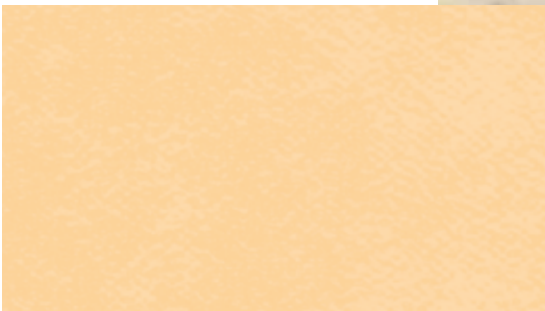

7104 Melon




FLOORING: TARALAY SÉCURITÉ SD ULTRA DIOPSIDE

Tarasafe Standard



7107 Poppy

Tarasafe Ultra




4128 Ruby

Tarasafe Standard



7115 Flame

Tarasafe Ultra

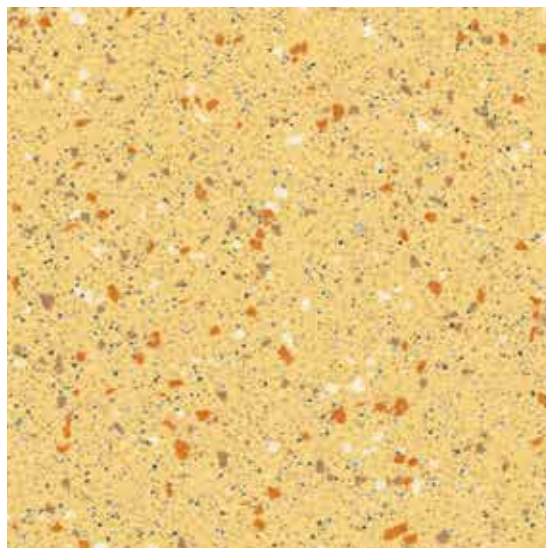

4323 Sandstone



WALL COVERING: BAMBOO LOTUS / LINEN

Presentation of the range

## WALL COVERING COLOR RANGE

### MURAL CALYPSO



Bs2d0



7744 Nordic Milk



7753 Nordic Zen



7734 Manhattan Concrete



7728 Manhattan Stone



7721 Manhattan Mist



7009 Fossil Haze



7008 Fossil Ice



7002 Bamboo Lotus



7000 Bamboo Snow Pearl



7001 Bamboo Haze Pearl



7740 Fabric Silk



7736 Fabric Wool



7414 Fabric Denim




7004 Prism Haze Pearl



7003 Prism Ice



7005 Blossom Snow Pearl




7006 Blossom Haze Pearl




7007 Blossom Lichen



7011 Lichen



7611 Snow



7104 Melon



7201 Moonlight




7309 Lotus



7311 Linen



7712 Shadow



7711 Ice



7715 Crystal



7714 Frost



7408 Skyline



7012 Breeze



7010 Haze

FLOORING COLOR RANGE

TARASAFE STANDARD



		
	7386 Savana	7618 Edelweiss
		
7508 Avocado	7312 Dune	7731 Marbre
		
7704 Sky Blue	7302 Sahara	7767 Dove Grey
		
7438 Baleine	7115 Flame	7773 Storm
		
7709 Royal Blue	7107 Poppy	7801 Noir



WALL COVERING: BAMBOO SNOW PEARL  
FLOORING: AVOCADO




## FLOORING COLOR RANGE


### TARASAFE ULTRA







8701 Opal




4463 Aqua




8704 Pebble




7383 Diopside




4323 Sandstone




7482 Halite




8709 Granite




7384 Citrine



4505 Peridot




4465 Cobalt




8710 Basalt




8013 Jasper




4508 Jade




4472 Moonstone




8717 Obsidian



4128 Ruby



4460 Topaz




4470 Sapphire


 Color reference available as Tarasafe Ultra H2O (R11)




## FLOORING COLOR RANGE


### TARASAFE ULTRA H2O




7325 Seashore




7720 Iceberg




7314 Sand




7746 Stone




7413 Ocean Blue




7418 Marine



7513 Seagrass



7732 Gravel




### ELEGANCE SD




0322 Jicama



0705 Patisson



0329 Hazelnut



0704 Raspberry Grey





# TECHNICAL INFORMATION ON COLORS


COLORS	LRV Light Reflectance Value (Luminance)	NCS
TARASAFE ULTRA		
8701 Opal	59,1	1500-N
8709 Granite	25,4	5502-B
8717 Obsidian	10,1	7502-B
7383 Diopside	59,6	1005-Y20R
7482 Halite	32,5	2030-R80B
8013 Jasper	23,5	5010-Y50R
4128 Ruby	13,8	3560-Y80R
4323 Sandstone	51,5	1030-Y20R
4505 Peridot	35,5	3030-G70Y
4508 Jade	26,1	3040-G20Y
4460 Topaz	23,0	4020-B30G
8704 Pebble	44,1	3000-N
4463 Aqua	35,1	3010-B30G
4465 Cobalt	23,6	3030-R90B
4427 Moonstone	12,6	6020-R90B
7384 Citrine	40,2	3010-Y20R
8710 Basalt	11,9	7502-Y
4470 Sapphire	17,1	3050-R80B
TARASAFE STANDARD		
7618 Edelweiss	57,9	1505-Y10R
7773 Storm	21,3	5502-B
7801 Noir	5,7	9000-N
7312 Dune	45,8	3010-Y30R
7438 Baleine	21,4	4020-R90B
7508 Avocado	32,8	1510-Y40R
7107 Poppy	11,4	1580-R
7115 Flame	18,5	3050-Y70R
7767 Dove Grey	34,1	3502-G
7386 Savana	44,3	2005-Y50R
7731 Marbre	51,2	2002-B
7302 Sahara	35,1	3020-Y20R
7704 Sky blue	31,6	2030-B
7709 Royal blue	15,3	4040-R80B

COLORS	LRV Light Reflectance Value (Luminance)	NCS
TARASAFE ULTRA H2O		
7720 Iceberg	21,8	1002-B
7746 Stone	23,1	5502-B
7732 Gravel	9,2	7502-B
7325 Seashore	60,7	1005-Y20R
7418 Marine	31,2	3030-R90B
7413 Ocean Blue	22,9	4020-R90B
7513 Seagrass	36,0	3030-G60Y
7314 Sand	41,2	3010-Y10R
ELEGANCE SD		
0704 Raspberry Grey	20,3	5005-R80B
0329 Hazelnut	36,4	3010-Y40R
0705 Patisson	64,4	1502-Y
0322 Jicama	67,8	1505-Y20R
MURAL CALYPSO		
7734 Manhattan Concrete	21,8	5500-N
7728 Manhattan Stone	39,5	3502-Y
7712 Shadow	40,7	3005-Y50R
7714 Frost	43,5	3000-N
7414 Fabric Denim	46,5	2020-R90B
7753 Nordic Zen	47,8	2502-Y
7736 Fabric Wool	49,4	2502-Y
7012 Breeze	55,7	1510-B20G
7311 Linen	56,5	1505-Y40R
7408 Skyline	56,8	1515-R90B
7740 Fabric Silk	58,8	1502-Y
7004 Prism Haze Pearl	60,2	1502-G50Y
7715 Crystal	60,6	1502-R
7104 Melon	61	1030-Y20R
7010 Haze	62,3	1502-G50Y
7009 Fossil Haze	62,7	1502-G50Y
7011 Lichen	62,8	1510-G20Y
7007 Blossom Lichen	63,8	1510-G20Y
7412 Manhattan Mist	64,6	1502-Y
7006 Blossom Haze Pearl	65,0	1502-G50Y
7001 Bamboo Haze Pearl	65,8	1502-G50Y
7008 Fossil Ice	67,4	1002-Y
7744 Nordic Milk	67,5	1502-Y
7003 Prism Ice	67,7	1502-Y
7201 Moonlight	70,5	0530-Y10R
7711 Ice	70,7	1002-G
7002 Bamboo Lotus	73,3	1005-Y20R
7309 Lotus	75,5	0804-Y30R
7005 Blossom Snow Pearl	75,6	0502-Y
7000 Bamboo Snow Pearl	80,2	0502-Y
7611 Snow	82,8	0502-G50Y

Information on welding rod available on [www.gerflor.com](http://www.gerflor.com)

SHOWER SYSTEM  
FLOOR/WALL & ACCESSORIES SYSTEM FOR BATHROOM


WALL ACCESSORIES

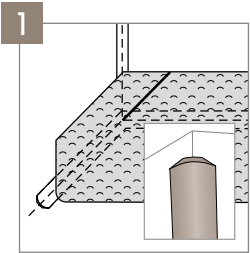

Cove former for internal wall angles CA 12 - H204




Perfect CR 41 wall weld - H231




Diminishing profile - 0490



FLOORING ACCESSORIES

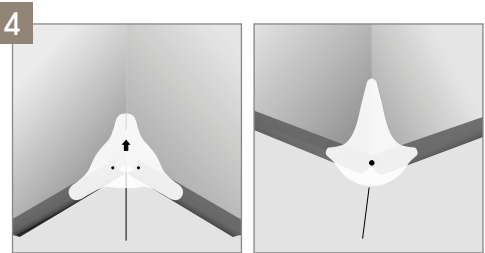

Clean Corner System IN 058S  
Clean Corner System OUT 058R



Cove former 4011



Tarafoam: acoustic insulation sublayer - 997C



Inox grid - 090C  
Drains - 090A (Vertical) / 090B (Horizontal)












The threshold has been developed in 3 colours: grey, beige and blue in order to answer to the specific requirement of Alzheimer units (no contrast).

- gris
- beige clair
- bleu

Shower threshold - 0469

ACCESSORIES

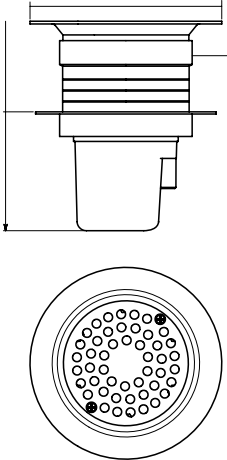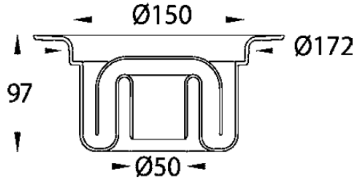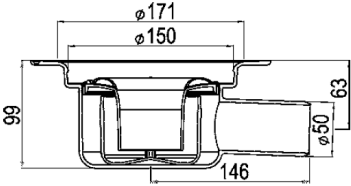



PVC DRAINS







Description	 <p>PVC DRAIN WITH INOX GRID</p> <p>090C</p>	 <p>PVC DRAIN</p> <p>090B</p>	 <p>PVC DRAIN</p> <p>090A</p>
	Drains are made from white injected PVC.		
	<p><b>They enable:</b></p> <ul style="list-style-type: none"><li>▶ Drainage of water</li><li>▶ Compatibility with the Shower System</li><li>▶ Complete watertightness by PVC/PVC bonding</li><li>▶ Fire rating NF-M1</li></ul>		
Colours	 <p>001</p>	 <p>001</p>	 <p>001</p>
Benefits	<ul style="list-style-type: none"><li>▶ Adjustable height (up to 85 mm with extension)</li><li>▶ For vertical exit (or horizontal when an elbow - not supplied - is fitted)</li><li>▶ Flow rate: 0,6 liter per second</li></ul> 	<ul style="list-style-type: none"><li>▶ An adjustable ring depending on the screeds</li><li>▶ Height adjustment</li><li>▶ <b>2 outlets (horizontal and vertical)</b> allow for flexibility on site</li><li>▶ 50 mm trap seal</li></ul>  <p>Packaging Unit</p>	<ul style="list-style-type: none"><li>▶ <b>Integral</b> drain with <b>vertical drainage</b></li><li>▶ 50 mm trap seal</li></ul>  <p>Packaging Unit</p>
Tips	<ul style="list-style-type: none"><li>• The floor covering is filled into the gully to a watertight seal.</li></ul>		






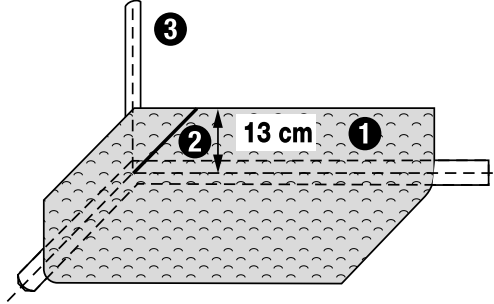
ACCESSORIES

COVE FORMER FOR INTERNAL ANGLES

TARAFOAM

Description	 <p>CA12</p> <p>H204</p> <p>Angle bead to be placed in the internal angles before installing the wall covering</p>	 <p>COMFORT VERSION OF THE SHOWER SYSTEM</p> <p>997C 6792</p>
	 <p>0719</p>	
	<ul style="list-style-type: none"><li>▶ Eliminates potential puncture damage to internal corners</li><li>▶ Size: 12 mm</li></ul>  <p>1 Cove the floor up to a height of 130 mm. 2 Cut the floor covering at 45° and weld the CR 40 rod. 3 Wall angle: double bonding of the CA 12 to the entire height.</p> <p>Packaging 1 x 50 lm coil</p>	<ul style="list-style-type: none"><li>▶ Provides <b>acoustic insulation</b> for the <b>Tarasafe floorcoverings</b> and comfort under foot.</li><li>▶ Thickness: 2mm.</li></ul> <p>Packaging Roll of 2 m x 20 lm</p>
Colours		
Benefits		
Tips		<ul style="list-style-type: none"><li>• Levels out around the edge of the room.</li><li>• Acrylic bonding.</li><li>• Edge to edge installation.</li></ul>


CLEAN CORNER SYSTEM IN		CLEAN CORNER SYSTEM OUT		
Description		CLEAN CORNER SYSTEM IN		CLEAN CORNER SYSTEM OUT
	058S		058R	
Colours	 0001		 0001	
	<ul style="list-style-type: none"><li>► <b>Neat and uniform design</b> on all corners</li><li>► <b>Easy and quick cleaning</b> and decontamination</li></ul>			
Benefits				
	196 x 176 mm		110 x 108 mm	
Packaging	<b>Packaging</b> 60 units per box		<b>Packaging</b> 20 units per box	
	● Installation instructions available on <a href="http://www.gerflor.com">www.gerflor.com</a>			
Tips				

PVC WALL COVERING/COVING JUNCTION		COVE FORMER		
Description		<b>DIMINISHING PROFILE</b>  Coving/wall covering connection  Used in laboratories, hospital shower systems, commercial kitchens		<b>PVC COVE FORMER</b>  This accessory allows the floor-wall cove to be formed
	0490		4011	
	Colours	 6512		 6512
Benefits	<ul style="list-style-type: none"><li>► Makes it easier to link the floor covering and wall</li><li>► <b>Hygienic.</b> Avoids bacteria accumulation</li><li>► <b>Prevents</b> the floor covering from <b>tearing</b>, improves <b>durability</b> and ensures <b>watertightness</b>.</li></ul>		<ul style="list-style-type: none"><li>► Enables coving and allows <b>watertightness</b></li><li>► Its rounded shape <b>makes it easier to clean</b> the floor/wall junction</li><li>► Offers a better look</li><li>► Limits the risk of piercing the floor covering</li><li>► <b>Prevents accumulation</b> of bacteria.</li></ul>	
				
	<b>Packaging</b> 2 x 25 lm rolls		<b>Packaging</b> 30 x 2 lm strips	
Tips	<ul style="list-style-type: none"><li>• Bond with acrylic adhesive</li></ul>		<ul style="list-style-type: none"><li>• Only a single 45° angle is cut</li><li>• Double bonding (polychloropene type)</li><li>• Use a miter shear for a perfect cut</li></ul>	

PVC SHOWER THRESHOLD PROFILE

DECOCHOC PANNEL


Description

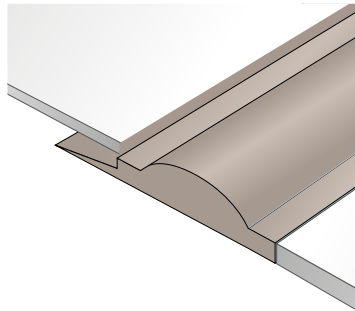

PVC SHOWER THRESHOLD PROFILE

Makes the junction between a floor covering and a shower covering

0469

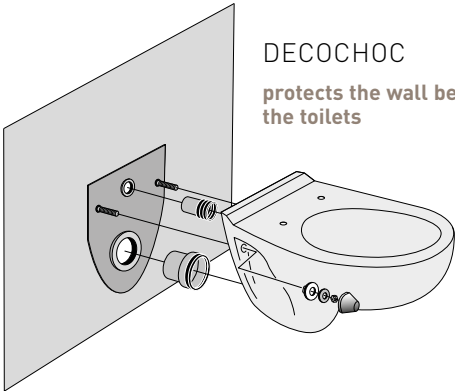

DECOCHOC

protects the wall behind the toilets


Colours



For more information, contact SPM.

Benefits


- Allows welding of 2 mm or 3.5 mm floor covering thanks to the tab system
- Weld system with the covering which ensures perfect watertightness

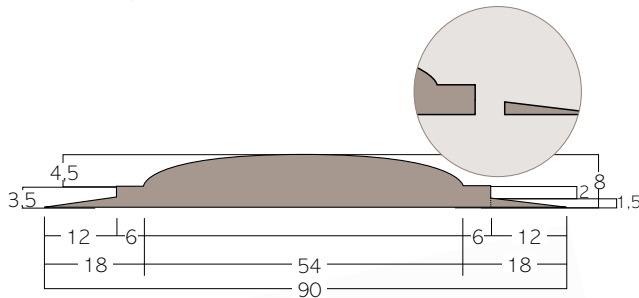

Packaging

10 x 3 lm strips

- Prevents blisters on the wallcovering at the junction of the toilets

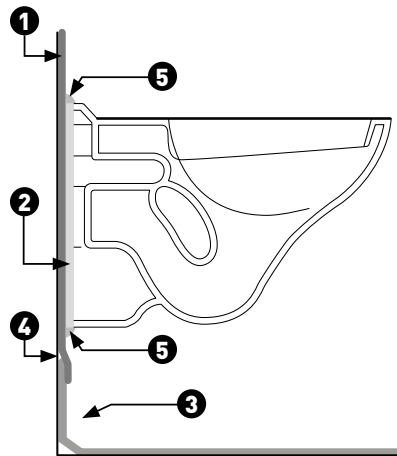

- 1 Gerflor wallcovering product
- 2 Decochoc
- 3 Flooring with 13cm cove form
- 4 Diminishing profile
- 5 Mastic

Tips

- The tab can be cut to suit a thicker floor
- Polychloroprene double bonding
- Application of sealant around the door jamb (PU or MS polymer sealant)

- Installation instructions available on [www.gerflor.com](http://www.gerflor.com)



LIST OF SPECIFIC TOOLS

ROMUS	JANSER S.A.	WOLFF	
e-mail : commercial@romus.fr	LIST OF SPECIFIC TOOLS	www.wolff.fr	
	ROMUS	JANSER	WOLFF
TRACER FOR COVING - 200 mm substrate bead	Ref. 95430	Ref. 222 430 100	
ADHESIVE SPATULA WITH INTERCHANGEABLE BLADE (18 CM)			
A 2 BLADE TKB STANDARD			
A 4 BLADE TKB STANDARD			
PRESSURE ROLLER - steel Ø 30 x 45 mm		Ref. 224 400 125	Ref. 111 200 000
COVING RULER - For cutting flooring 13 cm and 10 cm from the floor, for coving		Ref. 224 432 000	
CORK BLOCK FOR BONDING	Ref. 93145	Ref. 262 380 000	Ref. 720 930 000
COMBINED TRACER AND MARKING GAUGE - (spur 1 mm thick)	Ref. 09335	Ref. 262 130 500	
SPARE BLADE (in 5s)	Ref. 93356	Ref. 262 415 001	
SPARE POINT Ø 1.5 mm (in 20s)	Ref. 93357	Ref. 262 126 000	
ROLLER FOR INTERNAL ANGLE	Ref. 093135	Ref. 224 400 123	Ref. 116 340 000
ROLLER FOR EXTERNAL ANGLE		Ref. 262 614 000	Ref. 116 350 000
COVING FINISHING TOOL			
HOT CHAMFERING GOUGE FOR TARASFE			
ULTRA FAST NOZZLE		Ref. 224 800 007	
SPEED NOZZLE WITH BLOW HOLES	Ref. 95030	Ref. 224 700 300	
TRIANGULAR SCRAPER with interchangeable blade	Ref. 95185	Ref. 262 607 000	Ref. 721 030 000
SPARE BLADE		Ref. 262 627 001	Ref. 721 031 000
FINISHING SPATULA – For finishing flooring with projections		Ref. 262 609 100	Ref. 116 400 000 Ref. 116 402 000
PRESSURE BALL - Brass – Ø 13 mm – For rounding joints in angles		Ref. 224 816 000	Ref. 116 200 000
ROUNDED BALDE Ø 4 mm – For sharpening finishing spatulas and cleaning nozzles	Ref. 95191	Ref. 262 609 102	

ACCESSORIES AVAILABLE FROM GERFLOR (SEE PAGES 32-38)

OTHER RECOMMENDED ACCESSORIES, NOT AVAILABLE FROM GERFLOR

MASTIC - BOSTIK SA - Ref. : POLYMER MS107 de BOSTIK

SHOWER SYSTEM FLOORINGS

	Equipment used	Cleaning products	Cleaning methods
FLOORS	First use Manual cleaning	Alkaline detergent alcalin	<ul style="list-style-type: none"><li>• Damp sweeping</li><li>• Manual cleaning with a scrubbing brush</li><li>• Recovery of solid water with a flat mop</li><li>• Rinsing with clean water</li><li>• Let the floor dry</li></ul>
	OR Mechanical cleaning		
	Daily cleaning Manual cleaning	Neutral detergent Disinfectant detergent <sup>(1)</sup>	<ul style="list-style-type: none"><li>• Damp sweeping</li><li>• Manual washing with flat mop</li><li>• Rinsing</li><li>• Let the floor dry</li></ul>
	OR Mechanical cleaning		
	Deep cleaning Manual cleaning	Alkaline detergent	<ul style="list-style-type: none"><li>• Damp sweeping</li><li>• Manual cleaning with a scrubbing brush</li><li>• Recovery of solid water with a flat mop</li><li>• Rinsing with clean water</li><li>• Let the floor dry</li></ul>
	OR Mechanical cleaning		
	Cleaning of walls	Neutral detergent	<ul style="list-style-type: none"><li>• Wall washing</li><li>• Rinsing</li><li>• Let the floor dry</li></ul>

(1) In areas where disinfection is essential (e.g. operating theatres, hospital rooms, etc.), alternate between using neutral detergent and amine-free disinfectant detergent.  
(2) For further informations, please refer below.

For safety reasons (slipperiness), hygiene and to preserve the appearance of the product, in time, take care not to leave stagnant water or wet objects (mop, broom ...) and dry well between each maintenance.


WALL COVERING MURAL CALYPSO

	Equipment used	Cleaning products	Cleaning methods
First use	mop	Alkaline detergent	<ul style="list-style-type: none"><li>• Manual cleaning with an alkaline detergent + a microfibre disposable mop</li><li>• Recovery of water with a microfibre disposable mop</li><li>• Rinsing with clear water</li></ul>
Daily cleaning Once a day	mop	Neutral detergent for areas 1 and 2 + Disinfectant detergent (amine-free) for areas 3 and 4	<ul style="list-style-type: none"><li>• Manual cleaning with a mop or</li><li>• Steam cleaning</li></ul>
Periodical cleaning Once a month and at patient's departure in areas 1 and 2 Once a week and at patient's departure in areas 3 and 4	mop	Alkaline detergent or disinfectant detergent (amine-free)	<ul style="list-style-type: none"><li>• Cleaning with a mop + alkaline detergent</li><li>• Rinsing with clear water</li><li>• Disinfect with disinfectant detergent (amine-free) or</li><li>• Steam cleaning [if manual daily maintenance]</li></ul>
Deep cleaning Once a month	mop	Alkaline detergent	<ul style="list-style-type: none"><li>• Manual cleaning with an alkaline detergent + a mop</li><li>• Rinsing with clear water</li></ul>


These cleaning instructions have to be adapted depending on traffic and location of the area.

**⚠ ATTENTION, FOR PVC FLOORS AND WALLS CLEANING:**  
Do not use disinfectant detergents used to clean ceramics, toilets and sinks for PVC coatings. Also, do not allow the rinsing water of these products to flow on shower PVC floors and walls covering because they contain certain amines causing yellowing of PVC coverings.


## MURAL CALYPSO

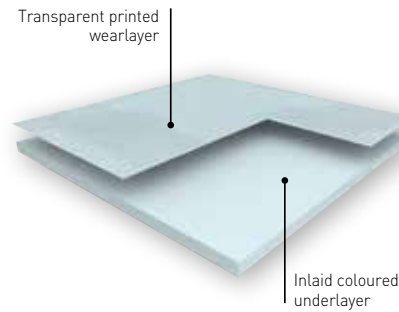


## ELEGANCE SD

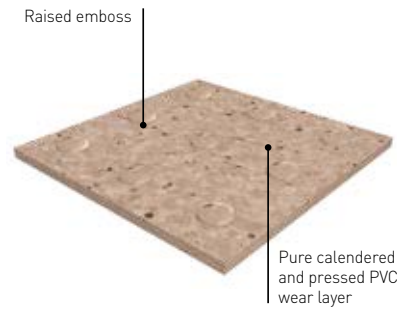


## TARASAFE ULTRA

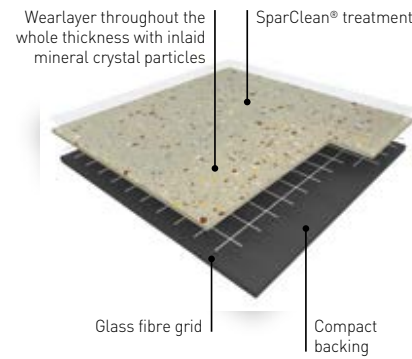

## TARASAFE STANDARD

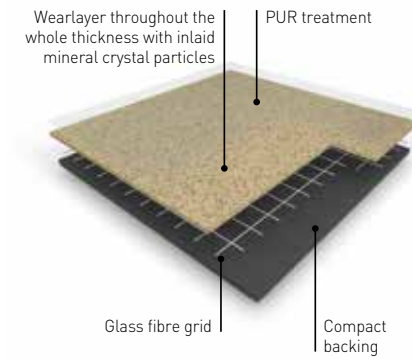

## TARASAFE ULTRA H2O

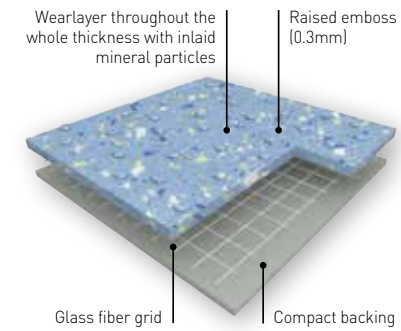

## MURAL CALYPSO

**MURAL CALYPSO** is a multilayered wall covering in 2m width roll and with a **B-s2,d0 fire classification** according to EN 13501.

It is hot welded with CR40 welding rods for a perfect water tightness.

It is made of a printed transparent wear layer and a **coloured** under layer for a better aspect of the welding. This layer comprises up to 30% of recycled products.

It does not contain any CMR 1 & 2 component and is 100% compliant with REACH.

It is 100% recyclable.

This wall covering is specially recommended for wet room areas and makes the installation in angles easier thanks to its flexibility.

The Shower System is compliant with most laws on "access for all" thanks to the installation in shower without tray.

## TARASAFE ULTRA

**TARASAFE ULTRA** is a slip resistant vinyl floor- covering, with an inlaid wear layer, deeply inlaid mineral particles and coloured chips for a decorative design and better slip resistance.

**TARASAFE ULTRA** is an ideal solution for traffic applications where enhanced slip resistance and durability are required. The mineral particles gives a Class B barefoot slip resistance (DIN 51 097) and R10 shod slip resistance (DIN 51 130).

It is reinforced with a glass fibre grid in sheet form. Its homogeneous wear layer provides a group T of abrasion.

It is treated with **SparClean®** surface treatment, a low maintenance cost effective solution providing extreme resistance from soiling and staining.

It does not contain any heavy metals or CMR 1&2 and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6). This product is 100%.

## TARASAFE STANDARD

**TARASAFE STANDARD**, with **PUR** surface treatment is a slip resistant safety vinyl floorcovering, with an inlaid wear layer and deeply inlaid mineral crystal particles (patented). It is reinforced by a glass fibre grid and available in a sheet format. It is an ideal solution for **heavy traffic applications** where slip resistance, durability, hygiene and easy maintenance are required. The mineral particles gives a Class B barefoot slip resistance (DIN 51 097) and R10 shod slip resistance (DIN 51 130).

**TARASAFE STANDARD**, is suitable for most contract & commercial areas. It is eco-friendly, 100% recyclable, Floorscore® certified and does not contain any heavy metals or CMR 1&2, it is also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6).

The **PUR** surface treatment improves the product performance in term of stain resistance and durability.

## TARASAFE ULTRA H2O

**TARASAFE ULTRA H2O** is a slip resistant vinyl floorcovering, with an inlaid wear layer, deeply inlaid mineral particles and coloured chips for a decorative design together with a raised emboss for better slip resistance.

**TARASAFE ULTRA H2O** is an ideal solution for traffic applications where enhanced slip resistance with barefoot and durability are required such as wet areas. The specific embossing together with the mineral particles gives a Class C barefoot slip resistance (DIN 51 097) and R11 shod slip resistance (DIN 51 130) which makes **TARASAFE ULTRA H2O** ideal for barefoot or shod applications.

It is reinforced with a glass fibre grid in sheet form. Its homogeneous wear layer provides a group P of abrasion.

It does not contain any heavy metals or CMR 1&2 and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6). This product is 100% recyclable and contains 18% of mineral material and 22% of inexhaustible material.




## ELEGANCE SD

**ELEGANCE SD** is a flexible homogeneous calendered compacted floorcovering available in 2 m sheet, with a non-directional polychrome design, to offer an even colour throughout the thickness. It should be hot welded with a CR 40 welding rod for a perfect watertightness.

**ELEGANCE SD** is specifically embossed for wet barefoot traffic.

**ELEGANCE SD** is compliant with antislip resistance norms (R9 according to DIN 51130 and B classification according to DIN 51097) for a **safe usage** in barefoot or shod applications such as showers. The Shower System enables access for all in showers especially for disabled people.

It is made of 32% mineral material and 34% renewable material. It uses 100% controlled recycled material. The TVOC emissions in the air at 28 days (EN 16000) are < 10 µg / m³. It is 100% recyclable.

			MURAL CALYPSO	ELEGANCE SD	TARASAFE		TARASAFE ULTRA H2O
					Ultra	Standard	Ultra
DESCRIPTION							
Total thickness	EN ISO 24346	mm	0.92	2.4	2	2	2 (on grainside)
Thickness of wearlayer	EN ISO 24340	mm	0.10	2.4	0.85	0.85	1.00
Weight	EN ISO 23997	g/m²	1610	3100	2460	2460	2400
Width of sheet	EN ISO 24341	cm	200	200	200	200	200
Length of sheet	EN ISO 24341	ml	30	20	20	20	20
CLASSIFICATION							
Product specification	-	-	EN 259-1	EN ISO 10581 (EN 649)	EN ISO 10582	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	-	34 - 43	34 - 43	34 - 43	34 - 43
Fire rating	EN 13 501-1	class	Bs2,d0	Bfl-s1	Bfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	-	< 2	< 2	< 2	< 2
Slip resistance wet	DIN 51 097 (barefoot)	class	-	B	B	B	C
	DIN 51 130 (ramp test with oil)		-	R9	R10	R10	R11
Determination of slip resistance – wbarefoot & shod + water	EN 13845-annexe C	class	-	-	ESf - ESb	ESf - ESb	ESf-ESb
Water tightness	EN 13553	-	-	OK	OK	OK	OK
PERFORMANCES							
Wear resistance	EN 660.2	mm³	-	≤ 4.0	≤ 2.0	≤ 2.0	≤ 4.0
Wear group	(EN 649)	group	-	P	T	T	P
Type Binder content	ISO 10582	type	-	-	I	I	I
	ISO 10581		-	I	-	-	-
Dimensional stability	EN ISO 23999	%	-	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Impact sound Insulation	EN ISO 717-2	dB	-	-	6	6	10
TARAFOAM Impact sound Insulation	EN ISO 717-2	dB	-	-	16	16	17
Residual indentation (requirement)	EN ISO 24343-1	mm	-	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Residual indentation (measure)	EN ISO 24343-1	mm	-	~ 0.03	~ 0.03	~ 0.03	~ 0.03
Thermal conductivity	EN ISO 10456	W/(m.K)	-	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	class	OK	OK	OK	OK	OK
Surface treatment	-	-	-	-	SparClean®	PUR	-
Anti-bacterial activity [E. coli – S. aureus – MRSA] <sup>(1)</sup>	ISO 22196	-	> 99% inhibits growth	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY							
TVOC after 28 days	ISO 16001	µg / m³	<100	<10	<100	<100	<100
Certification	-	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE MARKING							
CE	EN 15102	-	OK	-	-		-
	EN 14041	-	-				

(1) The implementation of an effective cleaning method is the best defence against infection.



Technical solution & accessories



## GERFLOR SERVICES

### PARTNER FOR ALL YOUR PROJECTS!

#### A TRAINING CENTER AVAILABLE FOR ALL

Dedicated to both vocational training for young people and continuing training of professionals.

#### A TECHNICAL ASSISTANCE

A technical team moves on your construction sites in order to support you in situ.

#### A KNOWN EXPERTISE

Take the advantage of our expertise and build together a global solution for your project.

#### A LARGE PALETTE OF ACCESSORIES



Handrails



Wall Coverings  
& Protections



Entrance  
mats



Skirtings &  
Profiles



#### ONLINE SERVICES

Access to all our services on our website



#### WELDING RODS MATCHING

<https://www.gerflor.com/services-pro/welding-rods.html>



#### VIRTUAL LIBRARY

Access to our documentation on line  
<https://www.gerflor.com/services-pro/virtual-library-pro.html>


#### ROOM VISUALIZER "INTERIOR DESIGNER"

##### New Interior designer

Choose a picture or upload the picture of your own project, select a Gerflor floor and visualize in few clicks the results!

<http://interiordesignerpro.gerflor.com>



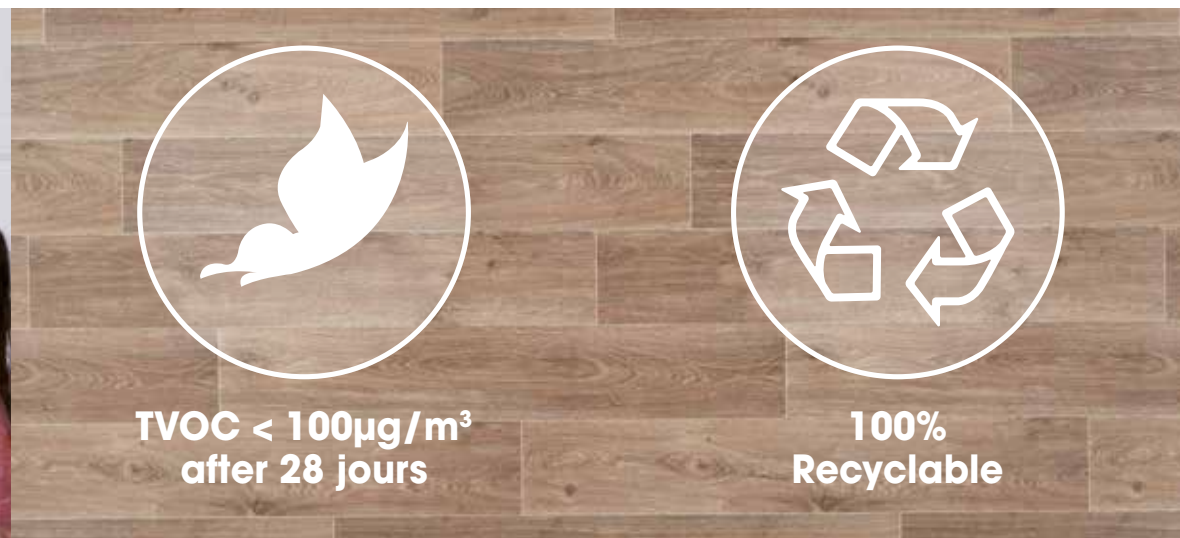

### COMPOSITION

- 100% REACH compliant
- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



### INSTALLATION

- Innovative adhesive free installation systems



### RECYCLED CONTENT

- 25% average recycled content
- 100% REACH compliant recycled content



### RECYCLING

- 100% recyclable product



### LIFE CYCLE ANALYSIS

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an ISO 14001 and ISO 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Exclusive surface treatments to reduce drastically the use of chemical product and water and ensure the lowest environmental impact



### INDOOR AIR QUALITY

- TVOC emissions 10 times better than norms requirements (TVOC < 100 µg/m³ after 28 days)
- TVOC < 10µg/m³ after 28 days for all products treated Evercare™ / Protecsol'2
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



### WELLNESS

- Health: Antibacterial activity (inhibits growth > 99%)
- Safety: Anti slip performance
- Comfort: Walking comfort and impact noise reduction

### RECYCLING "CLEAN" OFFCUTS:

(PRODUCTION AND INSTALLATION OFFCUTS, FLOORS WITHOUT ADHESIVE, OLD STOCK)

Gerflor has set up different programs to collect and recycle production and installation offcuts of PVC floors, and incorporate them into the production of new floors. Gerflor has created Floor to Floor, **a joint-venture with the leading recycling company Paprec**, with the target to recycle 5,000 t/year. With the Second Life program, Gerflor collects also offcuts from floors installers.



### RECYCLING "GLUED" OFFCUTS:

(FLOORS WITH ADHESIVE, END-OF-LIFE FLOORS)

Together with the professional federations, Gerflor propose to installers the collection of end-of-life floors and their recycling in a specialised recycling center, where PVC is extracted and introduced into other PVC-based products such as road traffic cones, pipes for construction...

For more information, please contact your Gerflor Sales Representative or send an e-mail to our specialist: [secondevie@gerflor.com](mailto:secondevie@gerflor.com)

## NOTES

[illegible][illegible]

## GERFLOR INTERNATIONAL

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: [gerflorcontract@gerflor.com](mailto:gerflorcontract@gerflor.com)

[gerflor.com](http://gerflor.com)

ARCHITECTURE  
DECORATION  
SPORT  
TECHNOSPECIFIC

### Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings  
& Protections



Entrance mats



Skirtings  
& Profiles

### Be connected!



[www.gerflor.com](http://www.gerflor.com)

#Gerflor

RC Lyon B 726 580 152 - JPE - 11/2022 - Z004 4239

## SHOWER SYSTEM, AN ECO-RESPONSIBLE CHOICE



**COMPOSITION**  
100% REACH



**RECYCLABLE**  
100%



**INDOOR  
AIR QUALITY**  
100 times better than  
norms requirements  
(TVOC < 10ug/m<sup>3</sup> after  
28 days)



**LCA**  
Eco-designed according  
to a product specific Life  
Cycle Analysis



**WELLNESS**  
Safety: Anti slip  
performance

**Gerflor**<sup>®</sup>  
theflooringgroup