

Colours available per product: please see the colour summary hinge

DECOTREND

DECORATIVE PROTECTION AND COVERING PANEL - 2 MM TREND DECOR



APPLICATIONS

This range of panels uplifts and highlights interiors in an original manner and fits into a modern and urban design.

Their high degree of strength is useful for covering walls of bedrooms, reception areas and dining areas in hotels, retirement homes, schools or any form of establishment open to the public.


The product can be thermoformed for use on round pillars (diameter under 800 mm) and to ensure a perfect hygiene in the angles.

DESCRIPTION


- Model: Decotrend decorative protection and covering panel
- Standard dimensions: 3 m x 1.30 m
- Custom options: cutting to size, bend into L/U, thermoforming, chamfer
- Thickness: 2 mm
- Material: Bs2d0 fire-rated PVC
- Surface finish: metalized or concrete or corten decor
- Fixing: adhesive bonding with SPM acrylic glue or SPM multipurpose adhesive sealant. Joints between panels can be made using silicone joints or PVC welding rods, colour matched to the range
- Colours: 4 trend decors

SPECIFICATION


- Description: trend effect decorative protection and covering panel (Decotrend as manufactured by SPM) from rigid metalized or concrete or corten effect PVC achieving Bs2d0 reaction to fire classification and impact and scratch resistance. A protective film is specified to minimise cleaning before acceptance. 3.00 m long, 1.30 m high, 2 mm thick.
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/ BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable. Over 20% of the product comes from recycled material.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions.

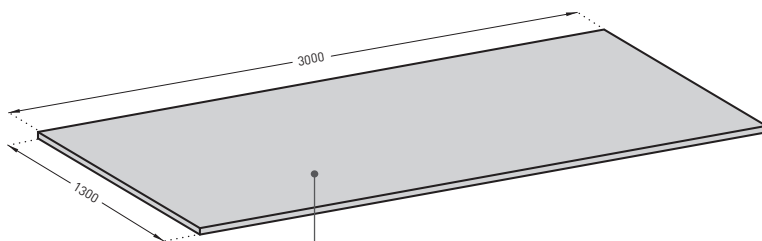

PVC trend decor
2 mm thick

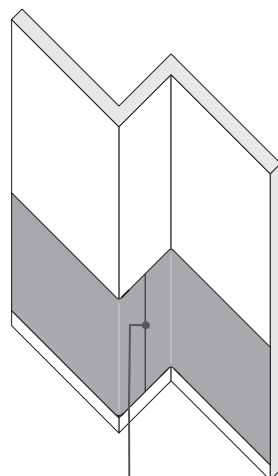

Welded
joint

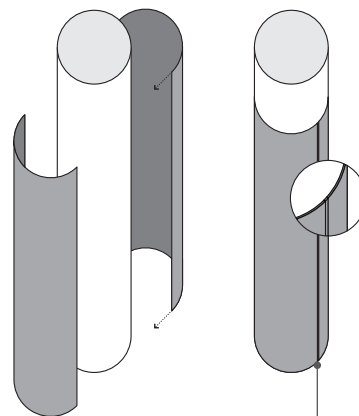

Welded
joint

Specifications and section drawings on our website www.spm-international.com



bimobject BimObject in Revit and Archicad