



# STREAMO

MARINE FLOORINGS FOR SHIP INTERIORS

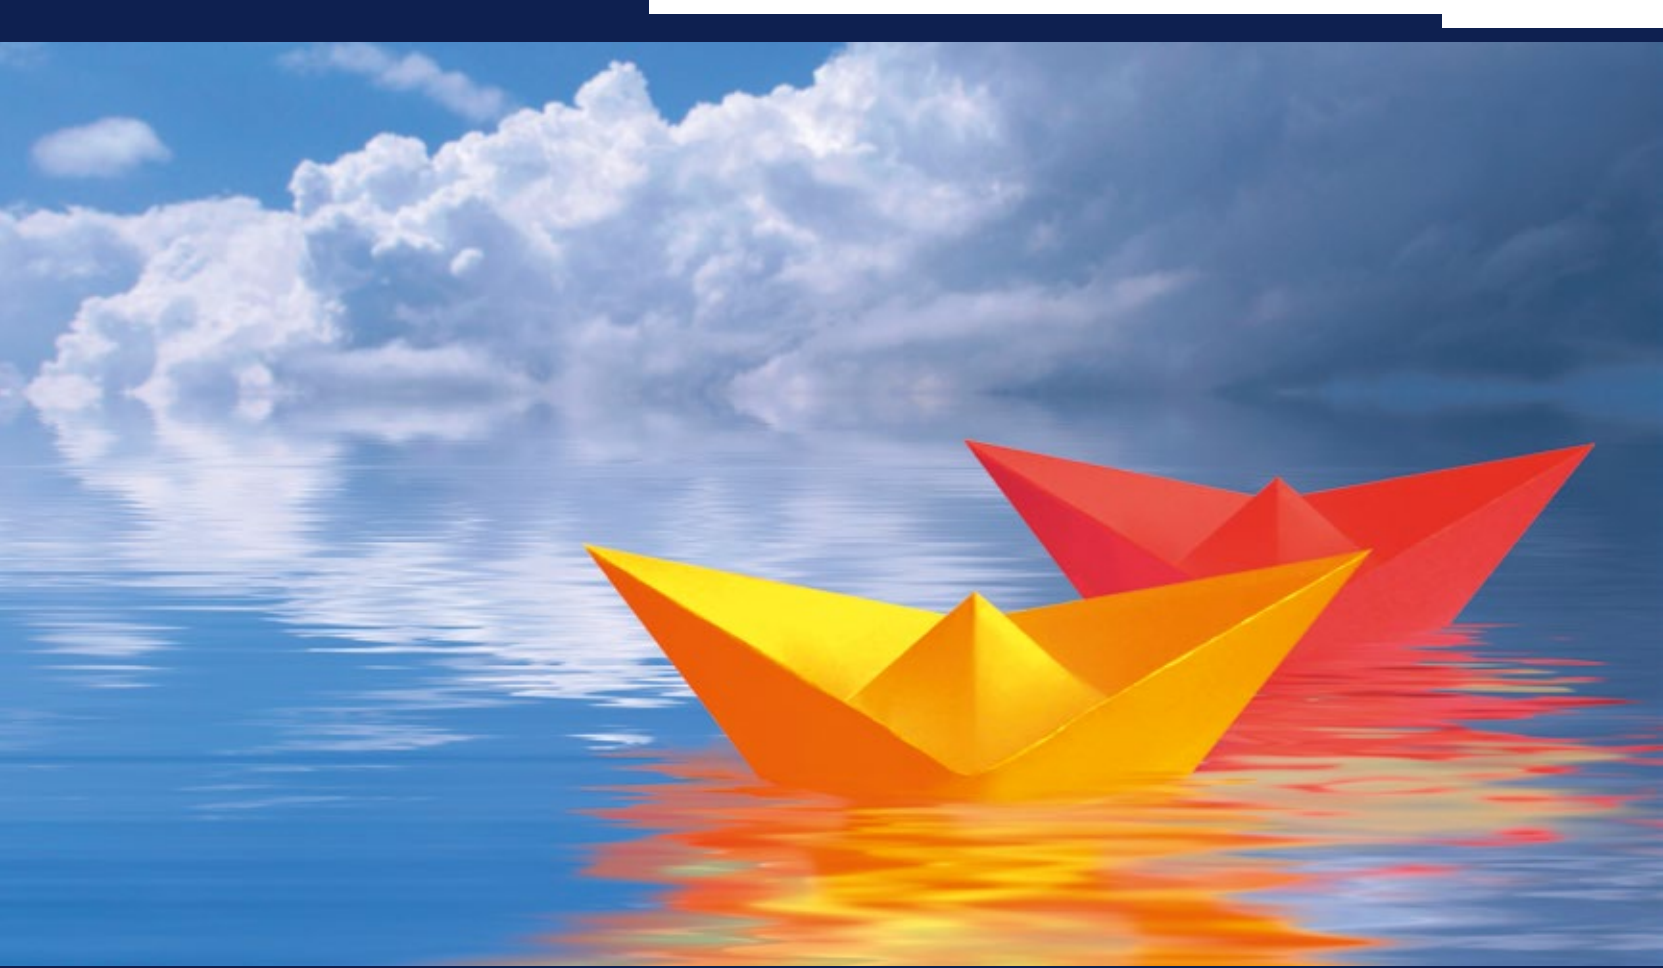

**SAILER**



**Gerflor**<sup>®</sup>

# STREAMO SAILER

High performance non-directional homogeneous flooring

**28**  
COLORS

Non-directional design, elegant and masking



Rolls 2 x 20 lm  
Tiles 608 x 608 mm on demand



TVOC < 10 ug after 28 days



For medium to heavy duty traffic


**100%**  
RECYCLABLE

22% recycled content



An exclusive and GERFLOR® patented surface treatment

## Evercare™ BY GERFLOR®




Gerflor®:  
Even thickness



100% non-porous surface  
Simple and easy stain removal

## Other treated floor covering




Missing treatment and uneven thickness



Non-treated product



Stain Shield



**Matt effect:** enhanced design & color, long lasting appearance




No wax for life  
Water and detergent saving




**Anti-bacterial & anti-viral activity**  
ISO 22196 & ISO 21702




# STREAMO SAILER

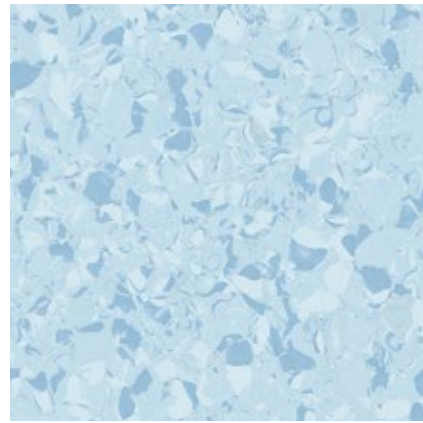


4496 Light Sapphire

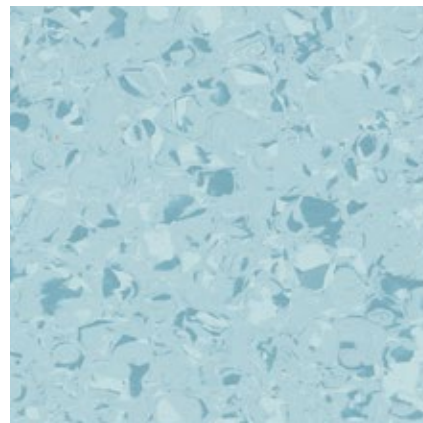


4417 Aquamarine

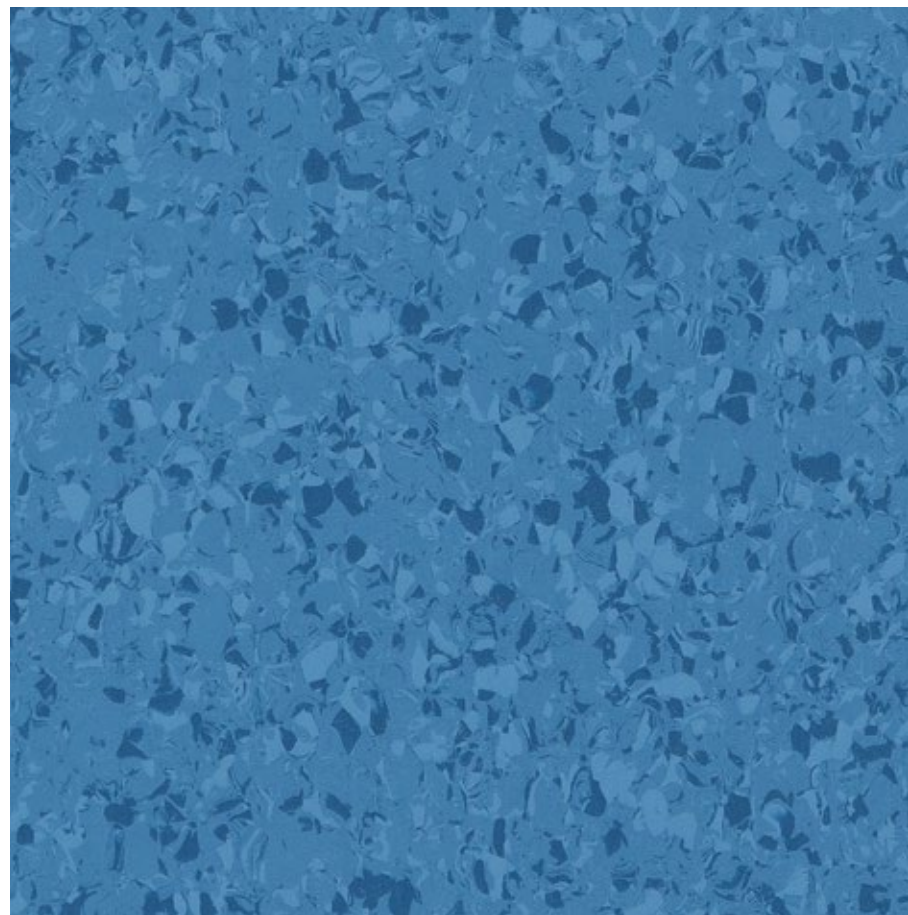


4446 Blue Ocean

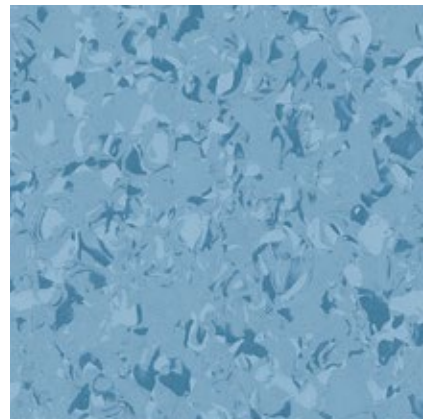


4416 Sapphire

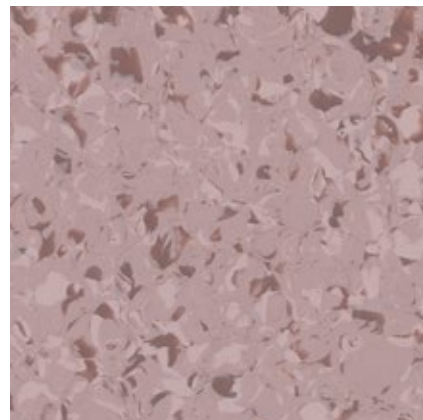


4437 Cashmere Rose

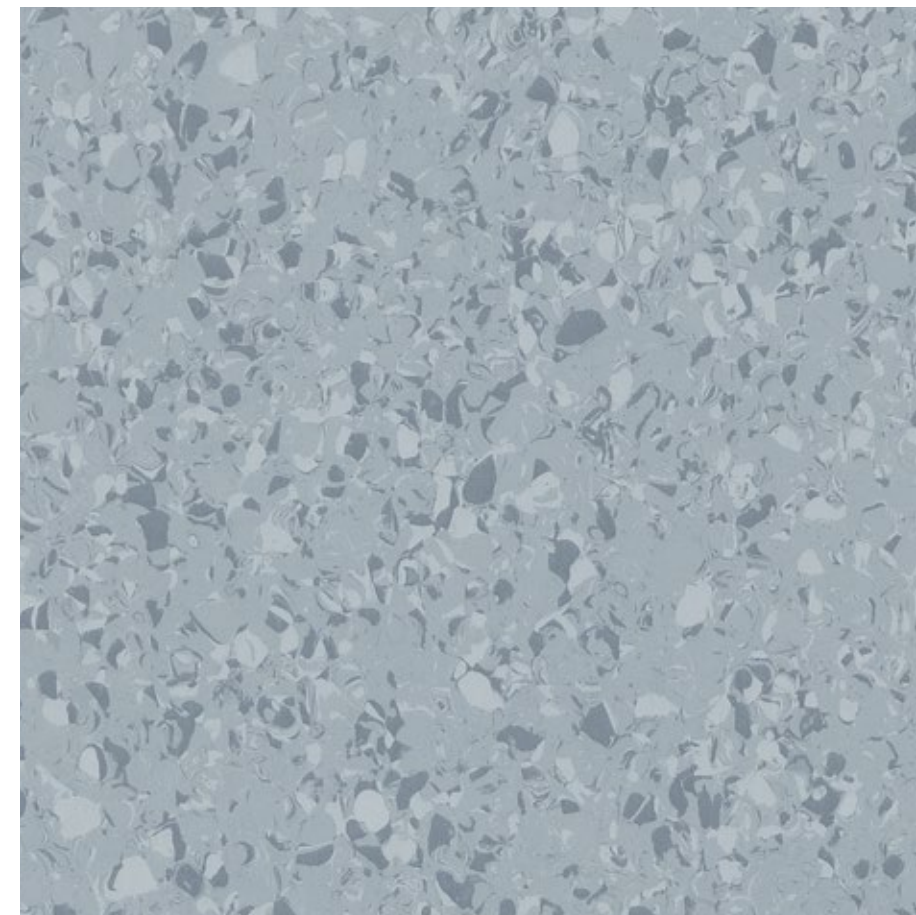

4420 Silver Grey

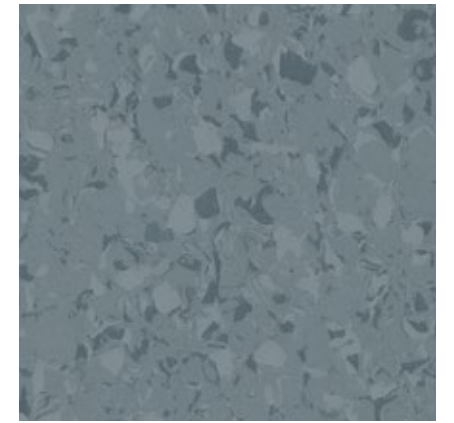


4450 Stormy Weather

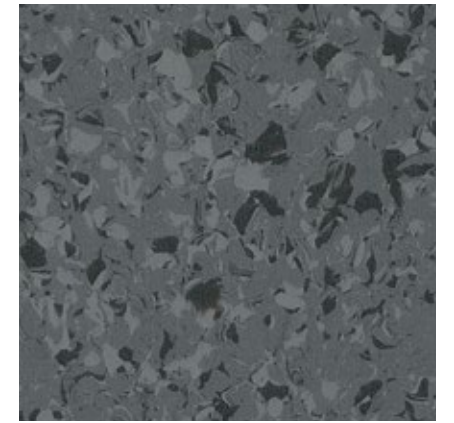

4459 Grey Storm



4429 Gray Opal

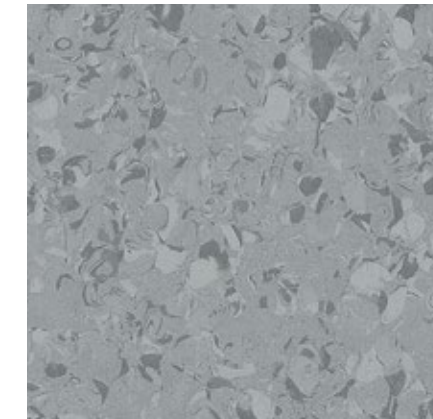

4430 Pearl Grey




4460 Black Stone



4408 Crystal Ice




4409 Matte Grey

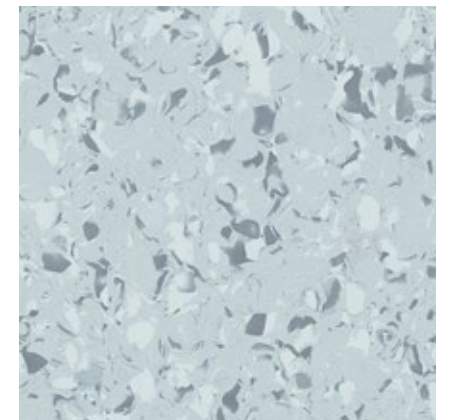

4410 Violet Grey

# STREAMO SAILER




4401 Quartz




4403 Natural Shade



4405 Sand Opal

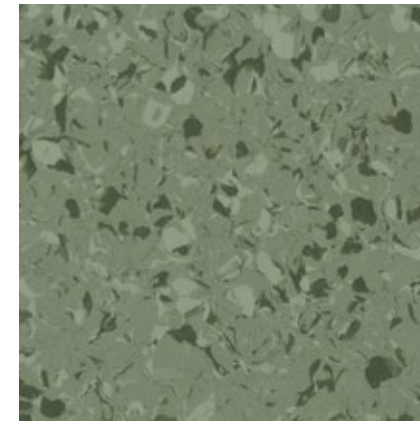

4457 Olivine

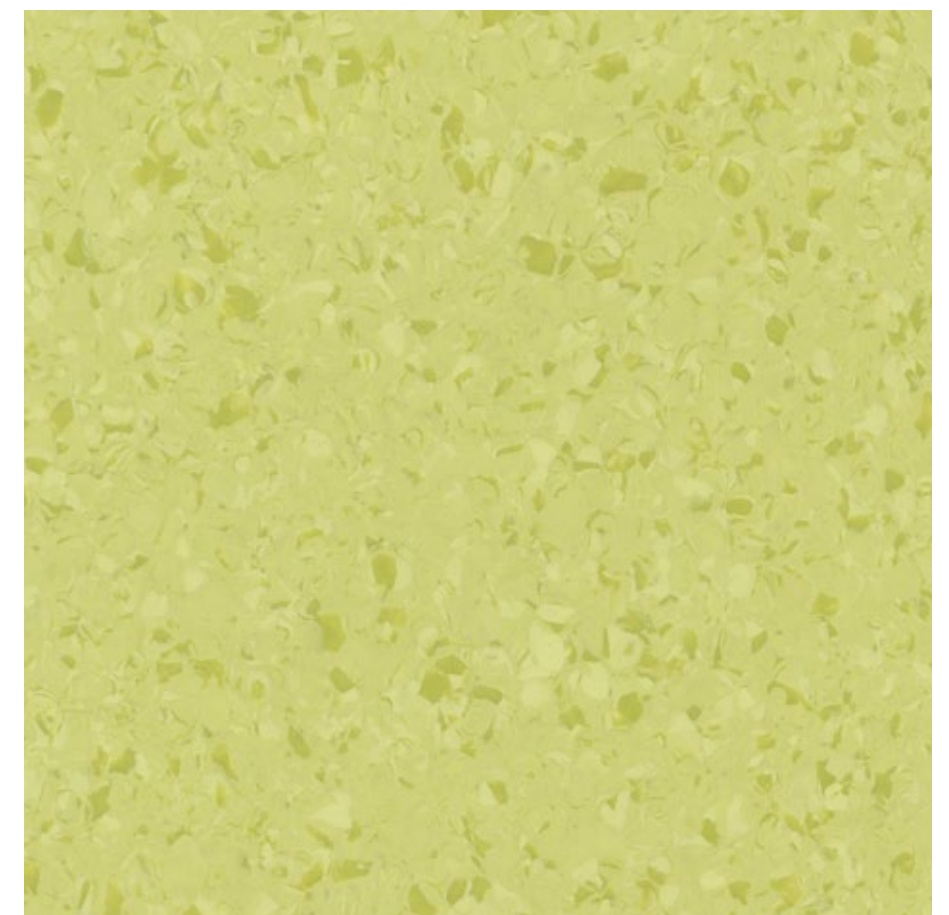

4447 Light Emerald




4432 Citrine




4424 Smoked Opal



4441 Light Greige

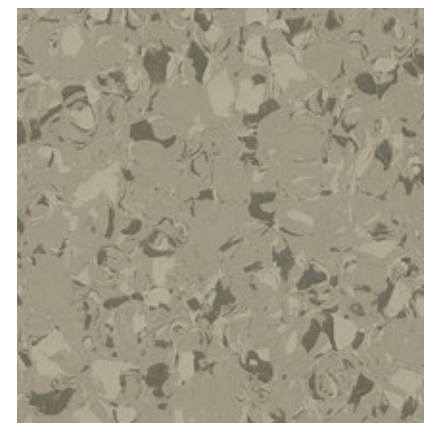


4443 Lime Taupe

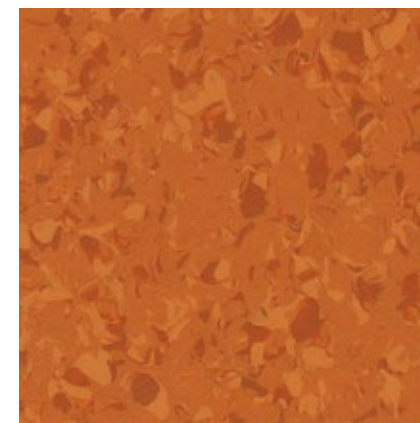


4455 Orange Sunlight




4425 Amber

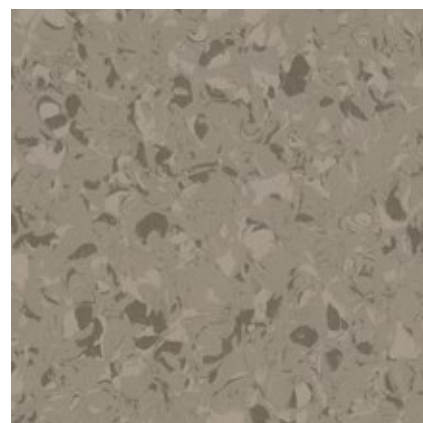


4463 Greige

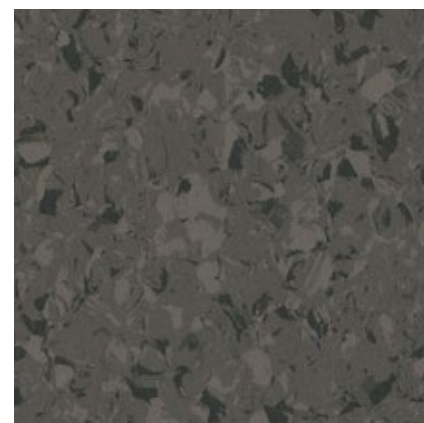


4445 Mocca

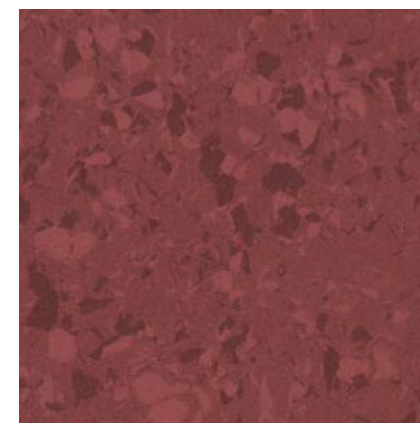

4448 Ruby

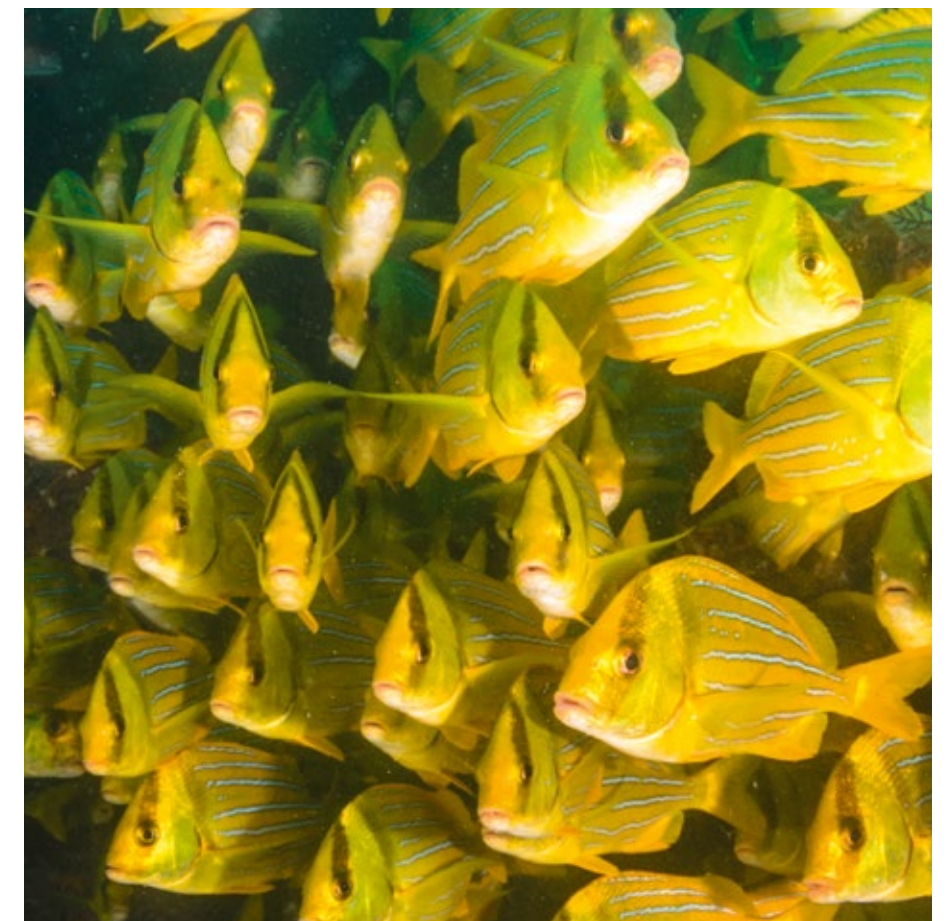

# STREAMO SAILER

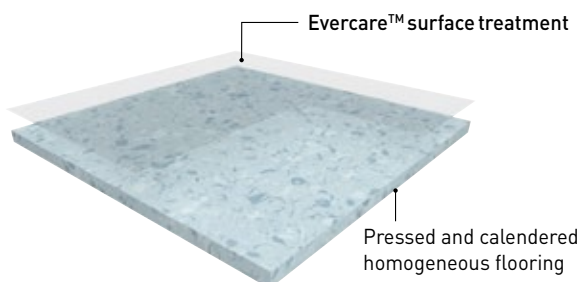

## INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor.

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available upon request.

DESCRIPTION / DESCRIPTION / BESCHREIBUNG / DESCRIPCIÓN / DESCRICÃO / DESCRIZIONE			
Total thickness / <i>Epaisseur totale / Gesamtdicke / Espesor total / Espessura total / Spessore totale</i>	EN ISO 24346	mm	2.0
Weight / <i>Poids / Gewicht / Peso / Peso / Peso</i>	EN ISO 23997	g/m <sup>2</sup>	2850
Width/length of sheet / <i>Largeur/longueur des lés / Rollenbreite/Rollenlänge / Ancho/largo de rollos / Largura/comprimento dos rolos / Larghezza/lunghezza dei teli</i>	EN ISO 24341	cm/lm	200/20
Tile size / <i>Format dalles / Format Fliesen / Dimensiones de las losetas / Dimensões dos mosaicos / Dimensione delle piastre</i>	EN ISO 24432	mm	608 x 608*
Sqm/Box / <i>m<sup>2</sup>/boîte / Qm pro Karton / m<sup>2</sup>/Bulto / m<sup>2</sup>/Caixa / m<sup>2</sup>/confezione</i>	-	-	7.39
Number of tiles per package / <i>Nombre de dalles par boîte / Fliesenanzahl pro Karton / Cantidad de losetas/caja / Quantidade dos mosaicos/caixa / N<sup>o</sup> piastre per confezione</i>	-	-	20
CLASSIFICATION / CLASSIFICATION / KLASSIFIZIERUNG / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI			
Norm/product specification / <i>Norme produit / Produkt Norm / Normas / Normas / Norma prodotto</i>	-	-	EN ISO 10581
Fire rating / <i>Classement feu / Brandverhalten / Fuego / Fogo / Reazione al fuoco</i>	IMO Resolution	-	MSC 307 (88) Part 5
			MSC 307 (88) Part 2
Maritime Approvals	-	-	Marine Equipment Directive
			UK-Marine Equipment Certification (MER)
			US Coast Guard
			Transport Canada
SOLAS 74			
Static electrical propensity / <i>Potentiel de charge / Begehaufladung / Comportamiento electrostático / Comportamento electrostático / Potenziale di carica</i>	EN 1815	kV	< 2
PERFORMANCE / PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE			
Wet Slip resistance / <i>Anti-glissance à l'humide / Rutschverhalten bei Nässe / Resistencia de deslizamiento en mojado / Antideslizamento condições no molhado / Índice de anticivilosidad con superficie bagnata</i>	EN 16165 App B	class	R9
Type Binder content / <i>Teneur en agent liant / Bindenmittelgehalt</i>	ISO 10581	type	I
Dimensional stability / <i>Stabilité dimensionnelle / Maßstabilität / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale</i>	EN ISO 2399	%	Sheet ≤ 0.40 / Tile ≤ 0.25
Residual indentation / <i>Poinçonnement statique rémanent / Resteindruck / Punzonamiento / Punçoamento / Impronta / (average measured value)</i>	EN ISO 24343-1	mm	~ 0.02
Thermal conductivity / <i>Conductivité thermique / Wärmeleitfähigkeit / Resistencia térmica / Resistência térmica / Resistenza termica</i>	EN ISO 10456	W/(m.K)	0.25
Colour fastness / <i>Solidité lumière / Lichtechtheit / Resistencia a la luz / Estabilidade das cores / Solidità alla luce</i>	EN 20 105 - B02	degree	> 6
Chemical resistance / <i>Résistance aux produits chimiques / Verhalten gegenüber Chemikalien / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici</i>	EN ISO 26987	-	OK
Surface treatment / <i>Traitement de surface / Oberflächenvergütung / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie</i>	-	-	EVERCARE™
Anti-bacterial activity (E.coli - S. aureus - MRSA) after 24h <sup>(1)</sup> / <i>Activité anti-bactérienne / Antibakterielle Aktivität / Actividad antibacteriana / Atividade antibacteriana / Azione batterio-statica</i>	ISO 22196	Class	> 99 % inhibits growth
Antiviral activity (Human Coronavirus) / <i>Activité anti-viral (Coronavirus humain) / Antivirale Aktivität (Humanes Coronavirus 229E) / Actividad antiviral (Coronavirus humano) / Atividade antiviral (Coronavirus humano) / Attività antivirale (coronavirus umano)</i>	ISO 21702	-	After 2 h > 99,7% virucidal activity After 5 h > 99,9% virucidal activity
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days / <i>TVOC après 28 jours / TVOC (28 Tage) / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni)</i>	ISO 16000-6	µg/m <sup>3</sup>	< 10
Certification / <i>Zertifikat / Certificado / Certificazione</i>	-	-	Floorscore®

\* Products available in tiles for a minimum quantity order of 500 sqm  
Complete collection on [streamobygerflor.com](http://streamobygerflor.com)

## Gerflor Don't forget our complementary ranges!



## IMPORTANT:

The information contained in this document is valid from 1/06/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

43, Boulevard Robert Michon  
69170 Tarare - France  
Tel.: +33 4 74 05 40 00  
Email: [streamo@gerflor.com](mailto:streamo@gerflor.com)  
[streamobygerflor.com](http://streamobygerflor.com)