

STREAMO

MARINE FLOORINGS FOR SHIP INTERIORS



SEACROSSER



Gerflor[®]
theflooringgroup

STREAMO SEACROSSER

High performing homogeneous multipurpose flooring

18
COLORS

directional
marbleized design




Rolls 2 x 20 lm



TVOC < 10 ug
after 28 days



For medium
to heavy duty traffic




Tiles 608 x 608 mm

100%
RECYCLABLE



An exclusive and GERFLOR® patented surface treatment

Evercare™ BY GERFLOR®



Gerflor®:
Even thickness



100% non-porous surface
Simple and easy
stain removal

Other treated floor covering




Missing treatment
and uneven
thickness



Non-treated product



Stain Shield



Matt effect: enhanced
design & color, long lasting
appearance



No wax for life
Water and detergent saving



**Anti-bacterial &
anti-viral activity**
ISO 22196 & ISO 21702

STREAMO SEACROSSER



1009 Light Grey



1010 Grey



1033 Brown



1059 Blue Grey



1040 Dark Grey



1060 Anthracite



2 m | 608 x 608 mm | Evercare™ | 100% recyclable



1006 Blue




1007 Green



1002 Beige



1035 Ocre

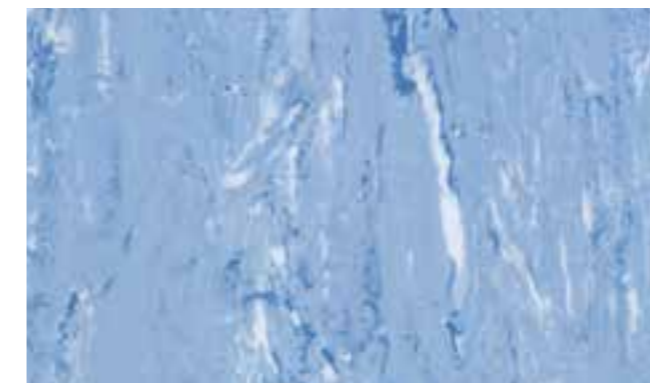

1036 Medium Blue




1037 Medium Green




1004 Earth



1032 Yellow

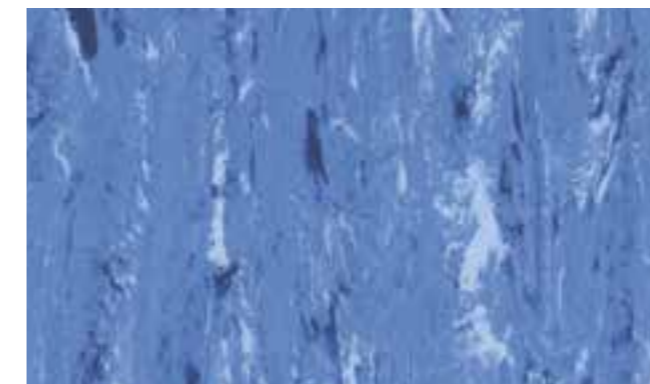

1056 Dark Blue

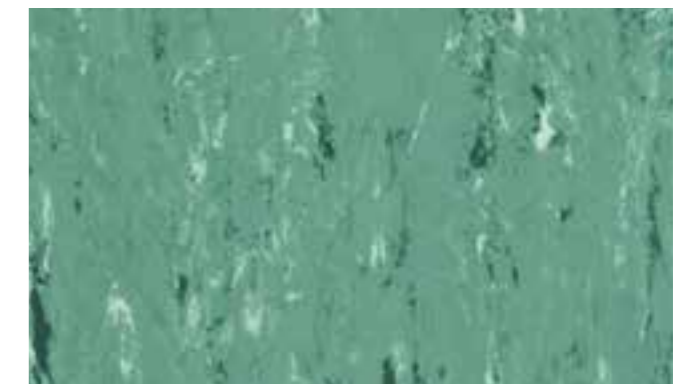

1057 Dark Green





1003 Light Ocre




1055 Apricot



-  Compact sheet without foam backing
-  Compact tile without foam backing

STREAMO SEACROSSER

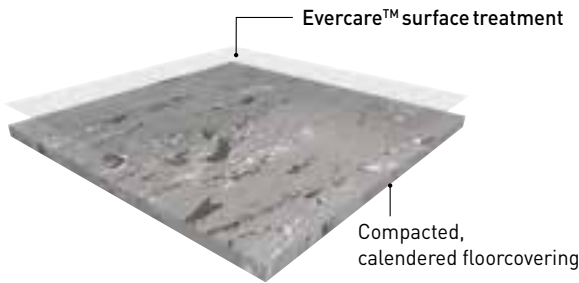

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor.

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available upon request.

DESCRIPTION / DESCRIPTION / BESCHREIBUNG / DESCRIPCIÓN / DESCRICÃO / DESCRIZIONE

Total thickness / <i>Épaisseur totale / Gesamtdicke / Espesor total / Espessura total / Spessore totale</i>	EN ISO 24346	mm	2.0
Weight / <i>Poids / Gewicht / Peso / Peso / Peso</i>	EN ISO 23997	g/m ²	3200
Width/length of sheet / <i>Largeur/longueur des lés / Rollenbreite/Rollenlänge / Ancho/largo de rollos / Largura/comprimento dos rolos / Larghezza/lunghezza dei teli</i>	EN ISO 24341	cm/lm	200/20
Tile size / <i>Format dalles / Format Fliesen / Dimensiones de las losetas / Dimensões dos mosaicos / Dimensione delle piastre</i>	EN ISO 24342	mm	608 x 608
Sqm/Box / <i>m²/boîte / Qm pro Karton / m²/Bulto / m²/Caixa / m²/confezione</i>	-	-	7.39
Number of tiles per package / <i>Nombre de dalles par boîte / Fliesenanzahl pro Karton / Cantidad de losetas/caja / Quantidade dos mosaicos/caixa / N° piastre per confezione</i>	-	-	20

CLASSIFICATION / CLASSIFICATION / KLASSIFIZIERUNG / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/product specification / <i>Norme produit / Produkt Norm / Normas / Normas / Norma prodotto</i>	-	-	EN ISO 10581
Fire rating / <i>Classement feu / Brandverhalten / Fuego / Fogo / Reazione al fuoco</i>	IMO Resolution	-	MSC 307 (88) Part 5
			MSC 307 (88) Part 2
	Maritime Approvals	-	Marine Equipment Directive
			US Coast Guard
			Transport Canada
			SOLAS 74
Static electrical propensity / <i>Potentiel de charge / Begehaufladung / Comportamiento electrostático / Comportamento electrostático / Potenziale di carica</i>	EN 1815	kV	< 2

PERFORMANCE / PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wet Slip resistance / <i>Anti-glissance à l'humide / Rutschverhalten bei Nässe / Resistencia de deslizamiento en mojado / Antideslizamento condições no molhado / Índice di antiscivolosità con superficie bagnata</i>	EN 16165 App B (DIN 51130)	class	R9
Type Binder content / <i>Teneur en agent liant / Bindemittelgehalt</i>	ISO 10581	type	II
Dimensional stability / <i>Stabilité dimensionnelle / Maßstabilität / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale</i>	EN ISO 23999	%	Sheet ≤ 0.40 / Tile ≤ 0.25
Residual indentation / <i>Poinçonnement statique rémanent / Resteindruck / Punzonamiento / Punçoamento / Impronta (average measured value)</i>	EN ISO 24343-1	mm	~ 0.03
Thermal conductivity / <i>Conductivité thermique / Wärmeleitfähigkeit / Resistencia térmica / Resistência térmica / Resistenza termica</i>	EN ISO 10456	W/(m.K)	0.25
Colour fastness / <i>Solidité lumière / Lichtechtheit / Resistencia a la luz / Estabilidade das cores / Solidità alla luce</i>	EN 20 105 - B02	degree	≥ 6
Chemical resistance / <i>Résistance aux produits chimiques / Verhalten gegenüber Chemikalien / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici</i>	EN ISO 26987	-	OK
Surface treatment / <i>Traitement de surface / Oberflächenvergütung / Tratamiento de superficie / Trattamento di superficie</i>	-	-	EVERCARE™
Anti-bacterial activity [E.coli - S. aureus - MRSA] after 24h ⁽¹⁾ / <i>Activité anti-bactérienne / Antibakterielle Aktivität / Actividad antibacteriana / Atividade antibacteriana / Azione batterio-statica</i>	ISO 22196	Class	> 99 % inhibits growth
Antiviral activity [Human Coronavirus] / <i>Activité anti-viral (Coronavirus humain) / Antivirale Aktivität [Humanes Coronavirus 229E] / Actividad antiviral (Coronavirus humano) / Atividade antiviral (Coronavirus humano) / Attività antivirale (coronavirus umano)</i>	ISO 21702	-	After 2 h > 99,7% virucidal activity After 5 h > 99,9% virucidal activity

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days / <i>TVOC après 28 jours / TVOC [28 Tage] / TVOC [28 dias] / TVOC [28 dias] / TVOC [28 giorni]</i>	ISO 16000-6	µg/m ³	< 10
Certification / <i>Zertifikat / Certificado / Certificazione</i>	-	-	Floorscore®

(1) The implementation of an effective cleaning regime is the most important against infection.

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Skirtings & Profiles



IMO adhesive



IMPORTANT:

The information contained in this document is valid from 1/11/2022 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

43, Boulevard Robert Michon
69170 Tarare - France
Tel.: +33 4 74 05 40 00
Email: streamo@gerflor.com
www.streamobygerflor.com

Gerflor
theflooringgroup