



Premium

Gerflor[®]

STILL UNIQUE
30 YEARS
EXPERIENCE

PREMIUM

THE UNRIVALLED HIGH TRAFFIC SOLUTION

A SUSTAINABLE CHOICE



100 % recyclable
Recycled content up to 53%



Adhesive free
for Attraction tiles



Health & Wellness
Anti-viral and **anti-bacterial** activity
Acoustic: reduction **-17 dB** (Comfort)
Indoor air quality: TVOC emissions
10 times better than norms requirements



Made in Europe

WE CARE | WE ACT.

Our commitments for a sustainable future

BEST TECHNOLOGIES IN ONE

EVERCARE™ TECHNOLOGY



Stain resistance



Matt surface

100% PURE HOMOGENEOUS WEARLAYER



Superior abrasion & traffic
resistance



Long lasting colors

MULTILAYERED CONSTRUCTION



Exceptional dimensional
stability



Acoustic properties
• 17 dB (Comfort sheet)
• 8 dB (Compact sheet)

my Premium

Customize
your floor!





PREMIUM, THE UNIQUE SOLUTION

- The proof is in the customer experience 04
- The best technologies in one 06
- Designs that exceed expectations 18
- A sustainable choice 28
- Gerflor services 30
- Technical data 32

PREMIUM
THE UNRIVALLED HIGH TRAFFIC SOLUTION

The proof is in the customer experience



“ **With 600 000 passengers per year**, plus their luggage and carts, this floor covering offers the advantage of **standing up to heavy traffic** while remaining easy to maintain.
Pau-Pyrénées Airport, France //

“ I realise every day Premium durability in comparison with a standard flooring: one is difficult to maintain, Premium is **clean and perfect**.
12 years old elementary school in Nurmo, Finland //

“ **For 20 years**, this mass-coloured surface has **always been satisfactory**. We’ve had **no problem with tears, scratches or wheel marks**.
Hospital in Lons-le-Saunier, France //



“ **After 10 years of intensive use**, Premium is still in excellent condition, which is something we are extremely pleased with. The same type of flooring has been used for other schools in our foundation, so we are in a good position to make a comparison. **Premium comes out on top**, each and every time.
Primary school De Meander in Ootmarsum, Netherlands //


“ We wanted a building that promotes employees health and encourages healthy lifestyles, a workplace that serves an exemplar of healthy work environment, **so we selected Premium as the best floor for indoor air quality**.
Medibank Headquarters, Melbourne, Australia //

“ Premium flooring **is very resistant to chemical and mechanical attacks**, and this colour range is trendy.
Städtisches Klinikum, Solingen, Germany //

The best of both worlds !


In the resilient flooring market, **Premium** offers the best of 2 worlds:

- Homogeneous inlaid surface
- Multilayered construction

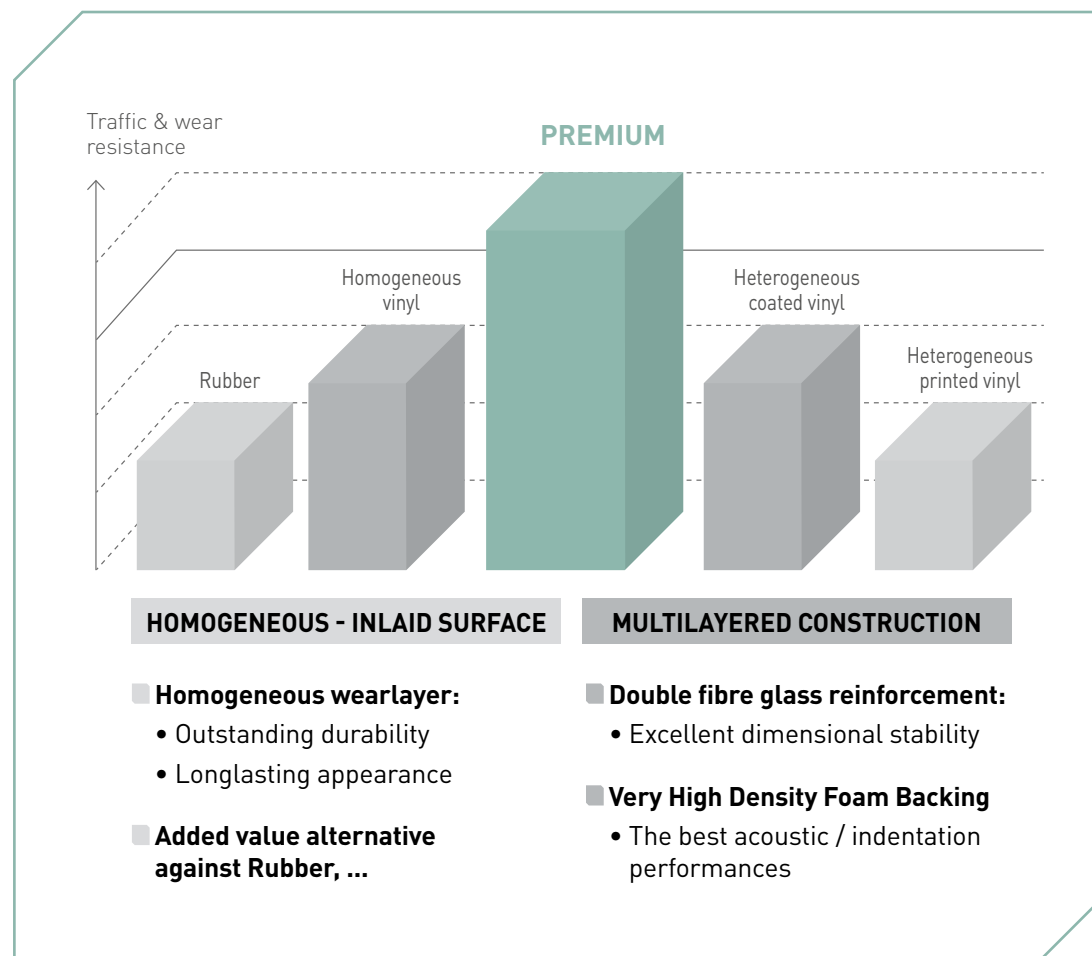

Top of Gerflor ranges


In the Gerflor product portfolio, **Premium** is the top of homogeneous & multilayered ranges.

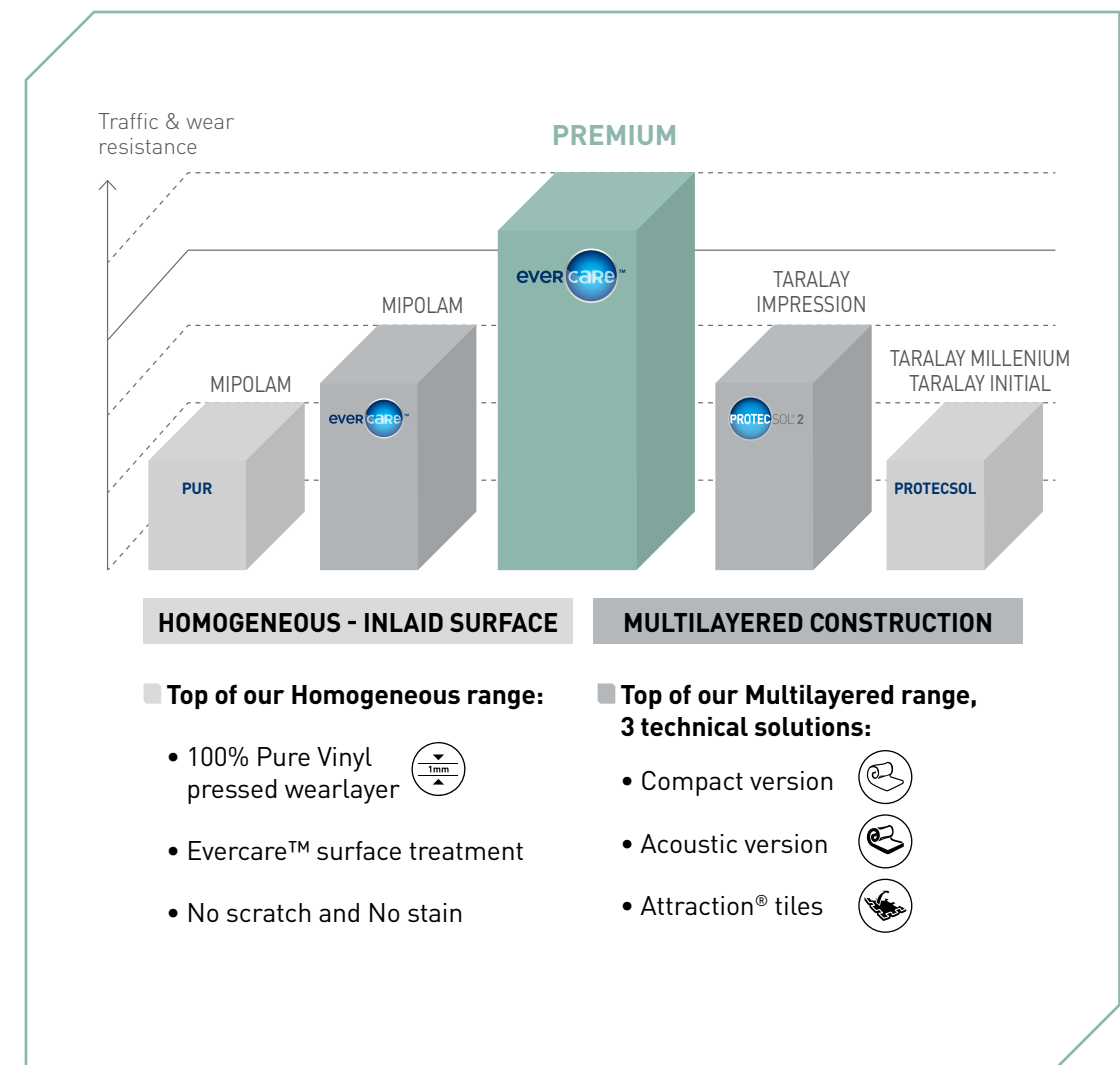

WHAT MAKES THIS FLOORING

UNIQUE?

The difference is in the details

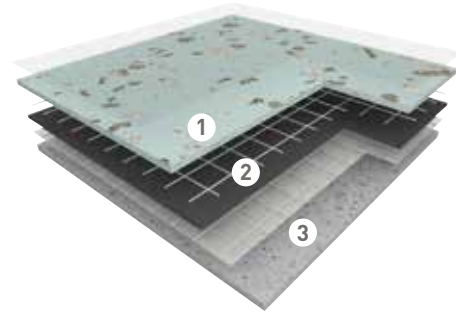

1 100% PURE VINYL PRESSED WEARLAYER

PREMIUM ⁽¹⁾




Cross-section

(1) Identical scale, enlarged 200 times

- > 1 mm
- Pressed under 800 tonnes
- 100 % PVC
- No transparent wearlayer


OTHER FLOORING⁽¹⁾



Printed flooring with transparent wearlayer
Air bubbles: dirt traps



Homogeneous flooring
Fillers: fragile and subject to scratches



Coated flooring
Irregular density: dirt traps




Rubber flooring
Porous and elastic: lower wear resistance and difficult to maintain



	Wear resistance	Scratch resistance	Soiling resistance	Colour durability	Yellowing effect resistance
PREMIUM	★★★★	★★★★	★★★★	★★★★	★★★★
Printed multilayered	★	★★	★	★★	★
Homogeneous	★	★	★★	★★	★★
Coated multilayered	★★	★★	★	★★	★★
Rubber	★	★★	★	★	★★

2 DOUBLE GLASS FIBER GRID REINFORCEMENT

PREMIUM

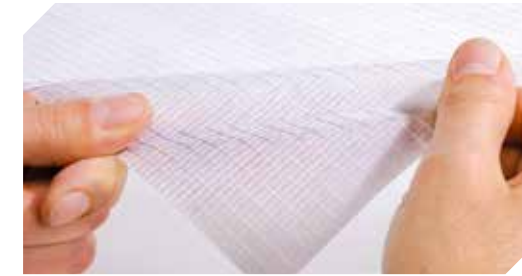

Perfect stability



OTHER FLOORING



Fragile veil: lower stability



3 VERY HIGH DENSITY FOAM

PREMIUM

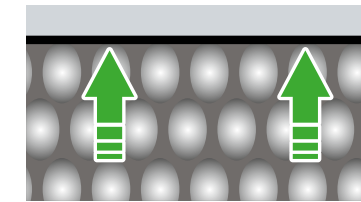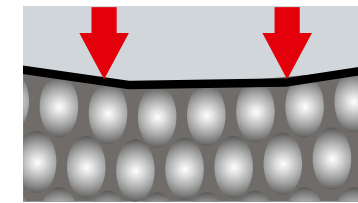

Closed and regular ovoid cells ease the roll of heavy loads

OTHER FLOORING

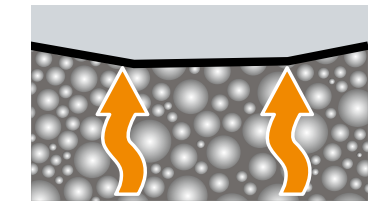
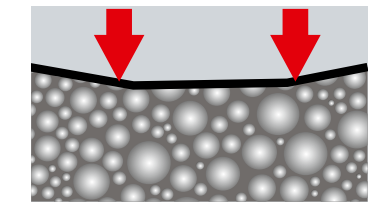


Irregular shaped and sized cells reduce the resistance to indentation



		Ease of rolling	Dimensional stability	Resistance to indentation
PREMIUM	Double glass fiber grid Very high density foam	★★★★	★★★★	★★★★
Other flooring	Standard veil Standard foam	★	★	★★

WHEN DESIGN MEETS THE BEST OF TECHNOLOGIES!

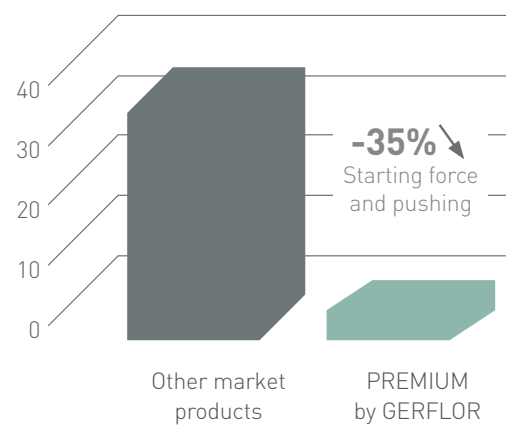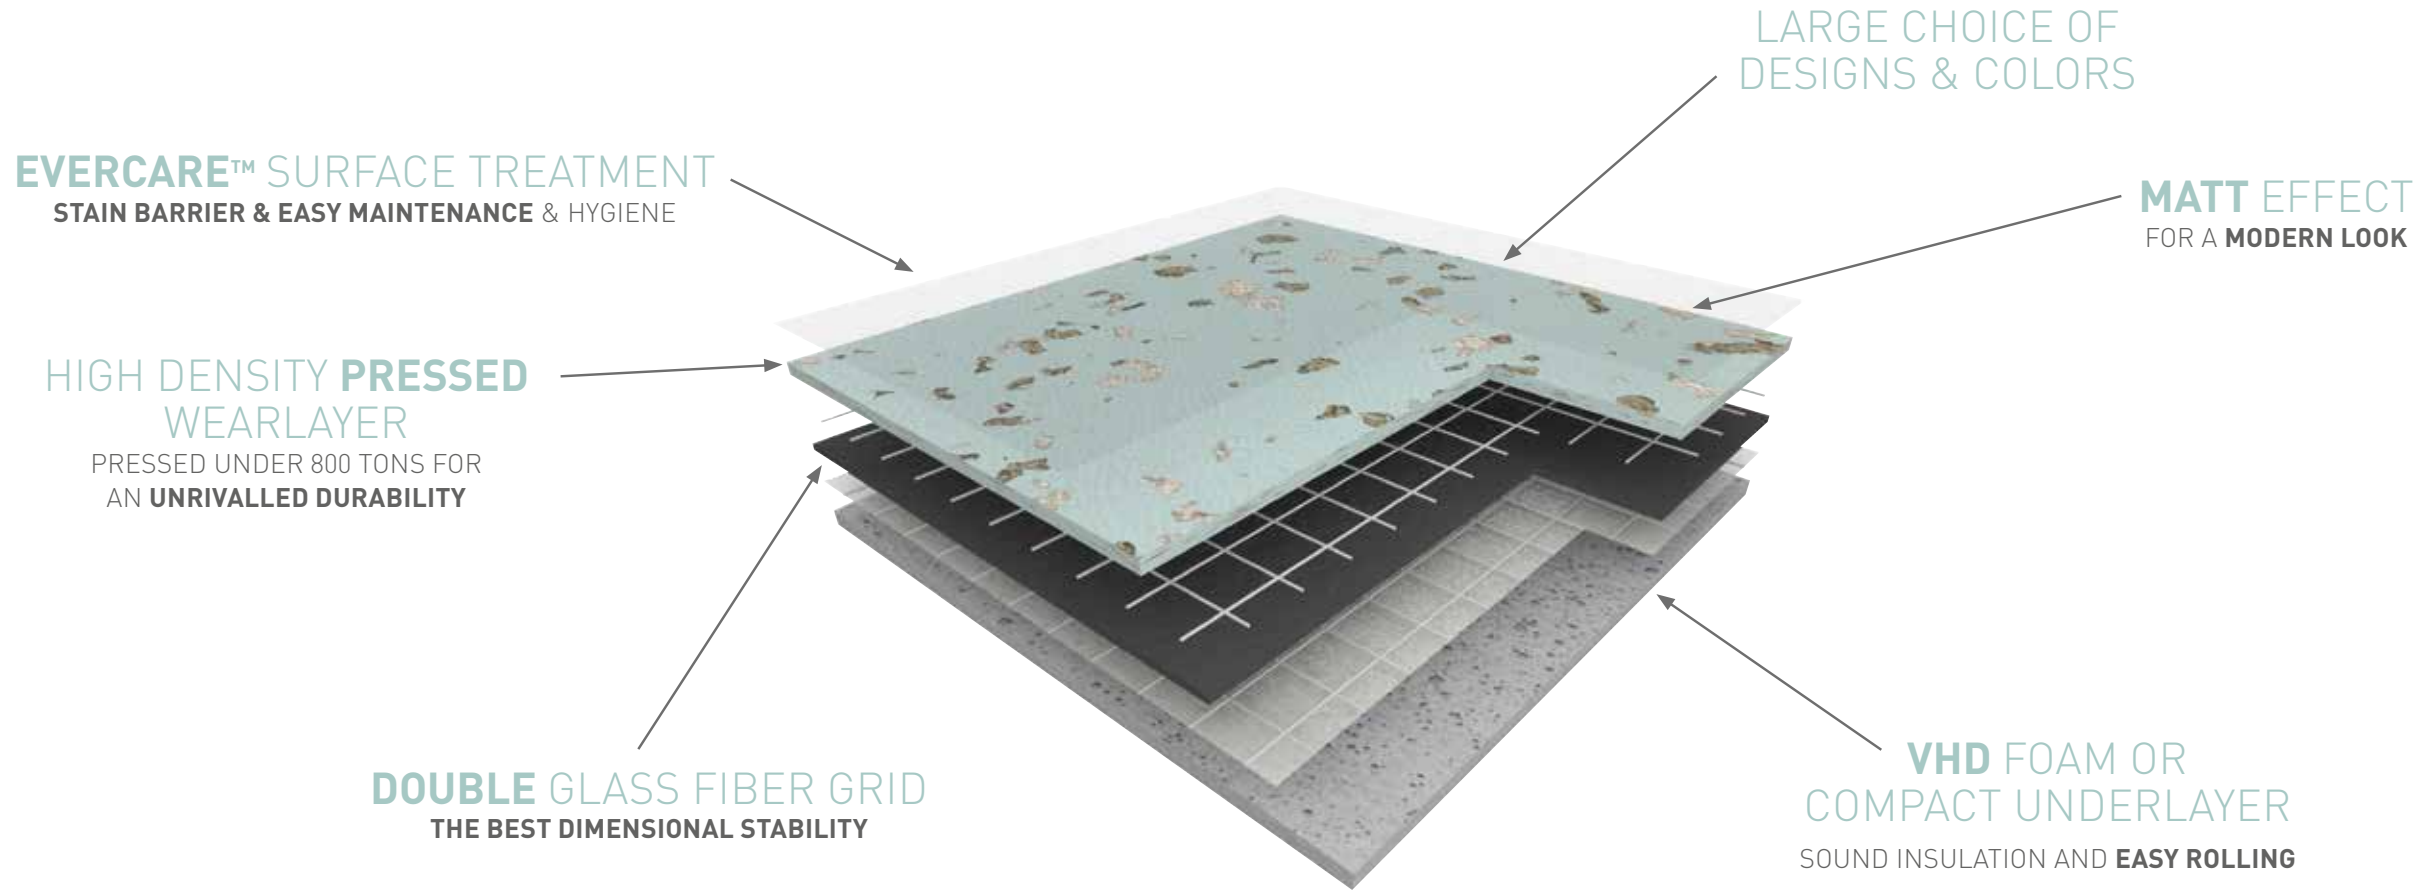


■ EASY ROLLING OF HEAVY LOADS

Premium floorings offer the best dynamic indentation: **starting force and pushing are reduced by 35% in comparison with other floorings.**

■ THE BEST INDENTATION RESISTANCE / ACOUSTIC PERFORMANCE


Gerflor floorings offer a very good indentation and pressure point loading resistance (bed or furniture etc.)

Combined acoustic and walking comfort for calming and relaxing areas.



COMPACT VERSION
8dB

Indentation: 0.02 mm



COMFORT VERSION
17dB

[Metallica: 16dB]
Indentation: 0.06 mm



EASY MAINTENANCE


Proven efficiency



EVERCARE™ technology, an exclusive patented Technology by Gerflor: ease of maintenance, no need for wax and polish for life, water and detergent savings, plus **3 additional benefits**:

1 STAIN SHIELD, BLOCKS EVEN THE TOUGHEST STAINS

Gerflor floorcovering with **EVERCARE™**



The **EVERCARE™** water-repellent effect prevents staining products from penetrating the materials (alcohol-based Eosin and Betadine, hydro-alcoholic gels, etc.), remaining on the surface.

Other floorcovering



All other product on the market let staining product penetrate the floor covering.



RESULTS AFTER CLEANING



Using a neutral detergent or an eraser for marker	PREMIUM	Printed flooring / transparent wearlayer	Homogeneous flooring	Coated flooring	Rubber flooring
After 10 min →					
After 1h →					

Complete stain resistance table available on request

2 NO WAX REQUIRED

= SAVED WATER AND DETERGENT

10x less cleaning products to maintain Gerflor floor coverings compared with a non-treated floorcovering.

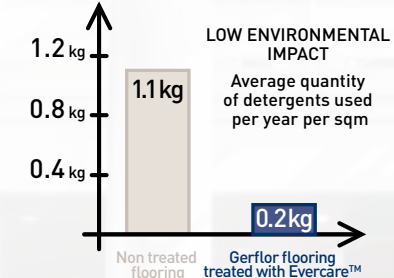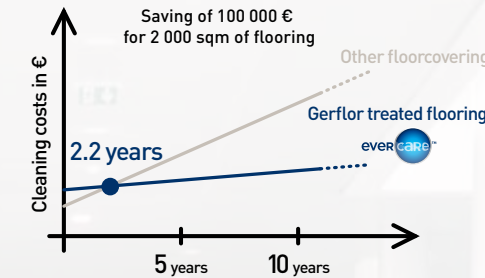

3 MATT EFFECT FOR A MODERN LOOK

ATTRACTION® TILES


The Premium solution for renovation



■ **INSTALLATION ON ANY TYPES OF SURFACE***

■ **SOLUTION FOR ASBESTOS SUBFLOOR** 

■ **HARD-WEARING MODULAR TILES**

 635 x 635 mm


■ **FAST INSTALLATION: NO NEED TO STOP WORK**

* for further information please refer to our documentation "Attraction®"


■ REFERENCES AVAILABLE IN STOCK




BRAZILIA - 8577 Amazonas




BRAZILIA - 8157 Goias




INDIANA - 4146 Moheli




INDIANA - 4476 Wattaru



BRAZILIA - 3709 Ceara



BRAZILIA - 4342 Juara




BRAZILIA - 8386 Boa Vista




INDIANA - 4343 Tokelau



OSMOZ - 4351 Greige




INDIANA - 8053 Anambas




BRAZILIA - 8736 Recife




INDIANA - 4003 Tao



INDIANA - 4004 Pago



BRAZILIA - 3707 Paraiba



INDIANA - 8837 Songo


NEOPOLIS



NEOPOLIS - 2745 Plaza



NEOPOLIS - 2744 Queens Soft



NEOPOLIS - 2740 Harlem Soft



NEOPOLIS - 2742 Times Square



NEOPOLIS - 2743 Central Park



NEOPOLIS - 2744 Brooklyn

Attraction® tiles: **ask for a unit sample**. Technical data sheet & product description available on gerflor.com

COMPLETE SOLUTION


100% coordination floors / walls / finishes

- **100% SAFETY**
LINEA'TOUCH handrail


- **100% PROTECTION**
Mural Ultra combined with LINEA'punch bumper

- **100% WATERPROOF**
Perfect hot-welded joint between floor and wall

- **100% HYGIENIC**
 - No areas where particles or bacteria can stagnate
 - Easy to clean

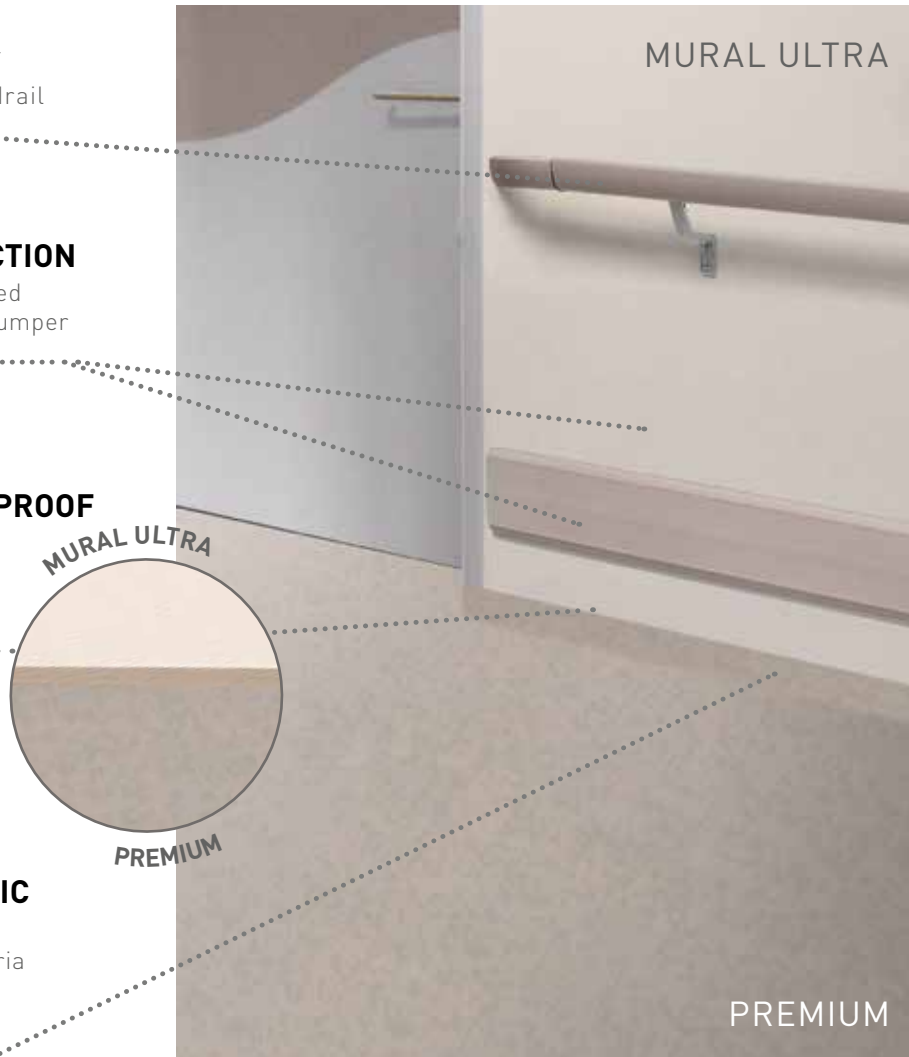


Patented system.




For further information, see the SPM and «Commercial flooring solutions» catalogues.

■ STAIRCASE SOLUTIONS

- Stair nosing
100% LANDING/STAIR HARMONY




PVC



ALU

- Complete step
TARASTEP 17dB

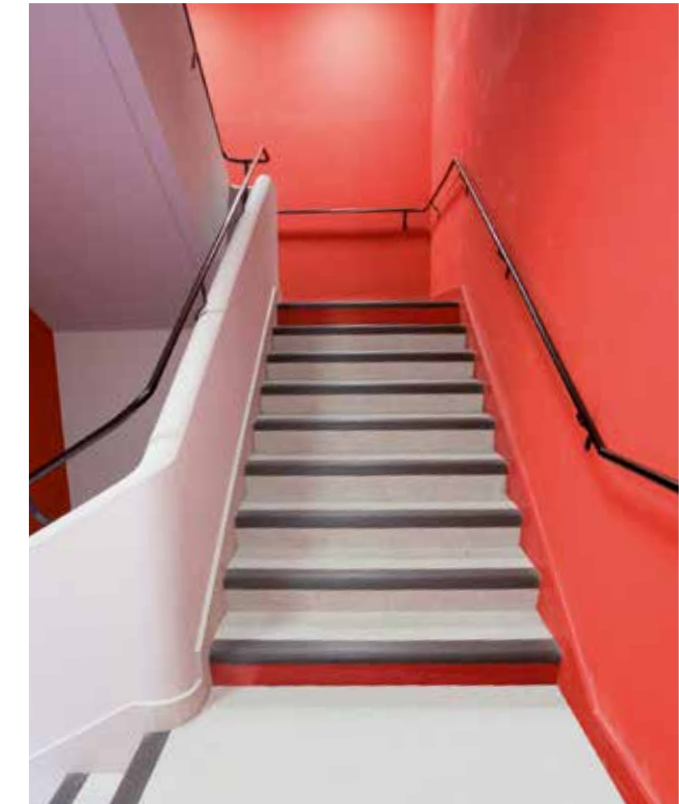

■ ACCESSIBILITY SOLUTIONS

- Warning strips
- Orientation strips



For further information, see the «A global solution for accessibility» brochure.

■ ROMUS ENTRANCE MATS

- Reduce dust
- Prevent premature soiling & wear of floor coverings



For further information, see the «Commercial flooring solutions» catalogue.


PREMIUM COLLECTION

FOR AESTHETIC, SOOTHING AND SMOOTH AREAS

Trendy colors and designs. Our Design Department works with a lot of designers, architects and colorists from all around the world to anticipate new decoration trends and to develop new designs and colors.




2 DESIGNS BASED ON TERRAZO TREND



POESY

Random terrazo effect thanks to pearly and metallic flakes




NEOPOLIS

- Raw terrazo effect with neutral and very urban tones
- Transparence effect to bring depth and emphasis



135 REFERENCES


6 DESIGNS




Brazilia




Osmoz



Poesy

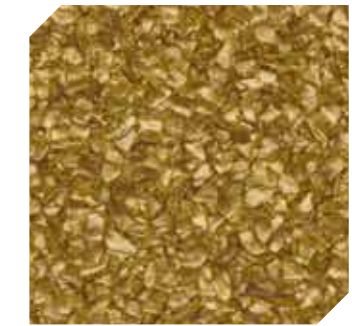

Metallica



Indiana



Neopolis

POESY

NEOPOLIS




NEW STANDARDS
LIGHTNESS
POETIC SOFTNESS
ORIGINAL



MASKING EFFECT
HIGHLIGHTING MATERIAL
RAW
UNEVEN URBAN

OSMOZ

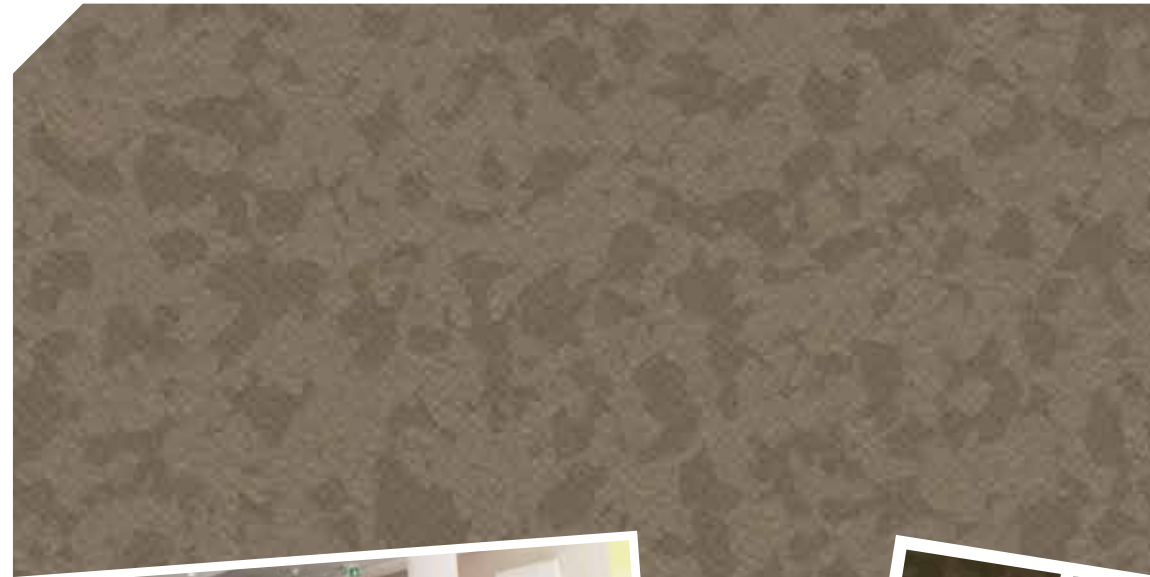

TONE-ON-TONE
UNIVERSAL NEUTRAL
SOOTHING EFFECT
ALMOST PLAIN COLOR

METALLICA



METALLIC EFFECT
3D
CRYSTAL
URBAN
POTENTIAL
ARCHITECTURAL

INDIANA

CONTRAST
HARMONY
SOFT TEXTURE
FASHION COLORS

4001	4002
8470	3788
4004	8226
4003	8053
4015	8837
4526	7517
4469	8150
8850	8059
4476	8262
4135	4343
8194	4009
4146	8256
4142	

BRAZILIA


ORIGINAL LIGHT
PREMIUM STORY CHEERFUL
GRANITE EFFECT

4136	8157
8269	4477
8577	4478
4478	3707
4329	8386
3734	4342
8736	3709




Customize your floor!

1 SELECT A DESIGN TYPE



Brazilia




Indiana



Osmoz




Poesy



Neopolis

2 CHOOSE YOUR GRANULES: PALETTE

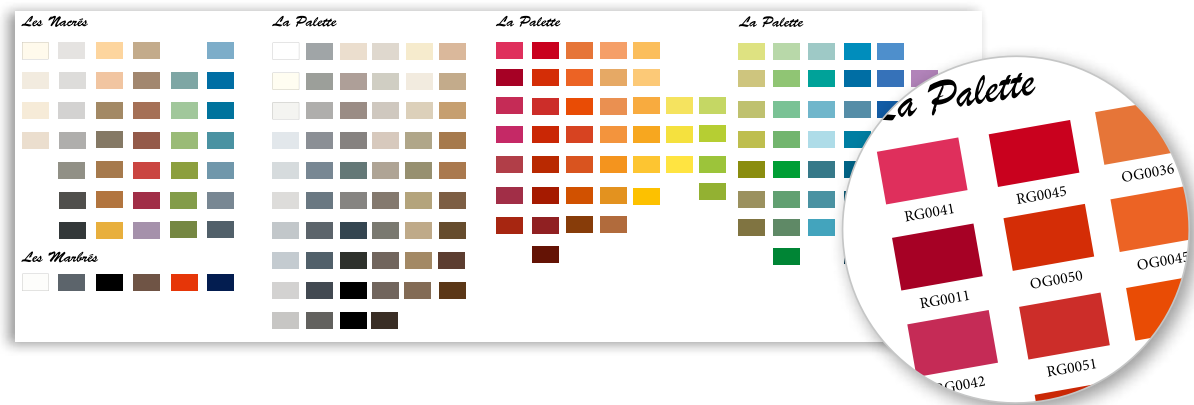

3 VISUALIZE YOUR DESIGN AND ORDER ONLINE ON

my Floor by Gerflor .com




Minimum order quantity:
2 000 sqm

A SUSTAINABLE CHOICE



THE BEST INDOOR AIR QUALITY

- **VOC EMISSIONS < 10microgram / m³ AFTER 28 DAYS**
→ 100 TIMES LOWER THAN NORM REQUIREMENTS
- **M1 AND FLOORSORE CERTIFIED**
- **TESTED BY AN INDEPENDANT LAB  eurofins**
The lab confirmed the emissions are below detection levels!
ATTRACTION® <2 microgram/m³ (TVOC after 28 days)
PREMIUM COMFORT <3 microgram/m³ (TVOC after 28 days)



PRODUCT COMPOSITION

- **100% REACH COMPLIANT**
- **PHTHALATE FREE***



RECYCLING

- **100% RECYCLABLE**
- **UP TO 53% RECYCLED CONTENT**
(including post manufacturing and post consumer waste)



THE BEST LIFE CYCLE ANALYSIS

- **LESS WATER AND DETERGENT USE THANKS TO EVERCARE™**
- **LESS ENVIRONMENTAL IMPACT, LESS COSTS**

*except recycled content



GERFLOR, THE PARTNER FOR ALL YOUR PROJECTS!



Make life easier!

WITH OUR EXPRESS DEPARTMENT

If you have technical questions or would like to request samples or documentation, contact:

By email: gerflorcontract@gerflor.com

By phone: +33(0) 474 054 000

By fax: +33(0) 474 050 313



TRAINING CENTRE OPEN TO ALL PROFESSIONALS

Dedicated to training young professionals and providing CPD for experienced professionals.

CUSTOMIZED TECHNICAL SUPPORT

Our technicians will come to you to provide on-site support.

ONLINE SERVICE

In just a few clicks, you'll find a whole range of tools to make your life easier on our website.

WELDING ROD AND FLOORING MATCHING TOOL

<http://www.gerflor.com/servicesprofessionals/welding-rods-matching.html>



VIRTUAL LIBRARY

See our documentation on line

<http://www.gerflor.com/servicesprofessionals/virtual-library.html>

DESIGN STUDIO: REAL-TIME SIMULATIONS

Interior Designer


Choose your interior, insert your Gerflor floor covering and see the finished effect in situ on:

<http://www.gerflor.com/services/professionals/interior-designer.html>



CUSTOMISED FLOORINGS, LOGOS...

For more information please contact your Gerflor Representative

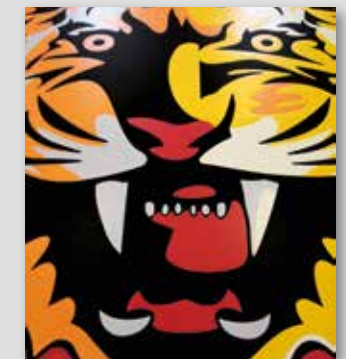

	PREMIUM COMPACT	PREMIUM COMFORT	ATTRACTION®
	Brazilia - Indiana - Metallica - Osmoz - Poesy - Neopolis	Osmoz - Indiana - Metallica - Brazilia - Poesy - Neopolis	Osmoz - Indiana - Brazilia

DESCRIPTION					
Total thickness	EN ISO 24346	mm	2.00	3.00 - 3.30	5.00
	ASTM F386-02	inch	0.08	0.12 - 0.13	-
Wearlayer thickness	EN ISO 24340	mm	≥1.02	≥1.02	1.00
	ASTM F410-02	inch	≥ 0.039	≥ 0.039	-
Weight	EN ISO 23997	g/sq.m	≥ 2580	≥ 2800	7460
	-	lbs/sq.ft	≥ 0.53	0.58	-
Width of sheet	EN ISO 24341	cm	200	200	-
	-	feet - inch	6'6"	6'6"	-
Length of sheet	EN ISO 24341	lm	20	25	-
	-	feet - inch	66'	82'	-
Tile size	EN ISO 24342	mm	-	-	635 x 635 Connect 600 x 600 Cleantech (without dovetail) ⁽³⁾

CLASSIFICATION					
Norm / Product specification	-	-	EN ISO 10582	EN 651	EN ISO 10582
European classification	EN ISO 10874	class	34-43	34-42	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance	EN 16165:2021 - Appendix B (DIN 51 130)	class	R10	R10	R10

PERFORMANCE					
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T	T
Type binder content	EN ISO 10582	type	I	-	I
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.15
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20	≤ 0.10
Residual indentation (measure)	-	mm	≈ 0.02	≈ 0.06	-
Impact sound insulation	EN ISO 717-2	dB	8	17 (Metallica: 16)	-
Castor chair test (type W)	ISO 4918	-	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degré	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	Evercare™	Evercare™
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99 % inhibits growth	> 99 % inhibits growth	-
Antiviral activity (Human coronavirus) after 2h ⁽³⁾	ISO 21702	-	> 99,7% virucidal activity	> 99,7% virucidal activity	-

ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³	<10	<10	<10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®

CE MARKING					
CE	EN 14041				

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
(2) The implementation of an effective cleaning regime is the most important defence against infection.
(3) Available upon request.

PREMIUM COMPACT

The floor covering is made of a >1mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips, with a matt finishing and without a transparent wear layer.

It offers a T group wear rating and is available in 2 m wide sheet.

Its compact backing is calendered, pressed and reinforced with a glass fibre grid yielding.

It offers a 8 dB sound insulation, an indentation resistance of 0.02 mm and a rolling heavy loads easiness.

PREMIUM COMPACT is treated with Evercare™, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

According to ISO 21702, TARALAY PREMIUM COMPACT has anti viral activity against Human Coronaviruses : it reduces the number of virus by 99,7% after 2h00.

According to ISO 22196, it has anti bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h00.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with up to 50% recycled content ; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers*.

The products emission rate of volatile organic compounds is <10microgram/m³ (TVOC after 28 days – ISO 16000-6).

It is 100% recyclable.

PREMIUM COMFORT

The floor covering is made of a >1mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips, with a matt finishing and without a transparent wear layer.

It offers a T group wear rating and is available in 2 m wide sheet.

The product contains a compact backing which is calendered, pressed and a Very High Density (VHD) foam backing. It is reinforced with a double glass fibre grid.

It offers a 17 dB sound insulation, an indentation resistance of 0.06 mm and a rolling heavy loads easiness.

PREMIUM COMFORT is treated with Evercare™, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

According to ISO 21702, TARALAY PREMIUM COMFORT has anti viral activity against Human Coronaviruses : it reduces the number of virus by 99,7% after 2h00.

According to ISO 22196, it has anti bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h00.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with up to 50% recycled content ; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers*.

The products emission rate of volatile organic compounds is <10microgram/m³ (TVOC after 28 days – ISO 16000-6).

It is 100% recyclable.

*except recycled content

CODE	DESIGN	COLORS	LRV	NCS
3734	BRAZILIA	Almerim	52,3	2000-N
8577	BRAZILIA	Amazonas	44,0	2040-G70Y
4329	BRAZILIA	Bacabal	25,9	4005-Y80R
8386	BRAZILIA	Boa Vista	63,7	1002-Y50R
3709	BRAZILIA	Ceara	30,4	4005-R80B
4478	BRAZILIA	Copacabana	16,4	4030-B
8157	BRAZILIA	Goias	29,8	2060-Y50R
8269	BRAZILIA	Ipanema	47,3	2040-Y20R
4342	BRAZILIA	Juara	52,5	2002-Y50R
4477	BRAZILIA	Maceio	35,7	2030-B10G
3707	BRAZILIA	Paraiba	10,1	7005-R80B
8736	BRAZILIA	Recife	54,8	2005-R80B
4136	BRAZILIA	Sao Luis	16,2	2060-Y80R
4135	INDIANA	Aldabra	18,0	4020-R60B
8053	INDIANA	Anambas	22,9	5005-Y20R
8150	INDIANA	Bali	39,2	3005-Y50R
7517	INDIANA	Faroe	20,4	6010-G30Y
8226	INDIANA	Fidji	35,6	3502-Y
4015	INDIANA	Guinea	50,0	2030-G70Y
8194	INDIANA	Kornati	11,7	1580-R
4526	INDIANA	Lasia	41,5	1050-G
4002	INDIANA	Manua	63,0	1502-B
8850	INDIANA	Maupiti	35,2	2040-B
4146	INDIANA	Moheli	13,9	3060-Y80R
3788	INDIANA	Nauru	42,0	2502-Y
8059	INDIANA	Nicobar	21,8	5010-Y60R
4001	INDIANA	Ofu	88,7	0502-Y
4004	INDIANA	Pago	15,0	6502-B
4469	INDIANA	Pemba	27,9	3040-B40G
4142	INDIANA	Penang	23,5	1080-Y60R
8262	INDIANA	Rodrigues	33,8	3020-Y30R
8470	INDIANA	Samoa	12,3	7502-G
8837	INDIANA	Songo	7,3	8000-N
8256	INDIANA	Tahaa	56,5	1060-Y10R
4003	INDIANA	Tao	27,5	4502-B
4343	INDIANA	Tokelau	46,7	2005-Y50R
4009	INDIANA	Tufoa	66,3	1005-Y20R
4476	INDIANA	Wattaru	12,4	5030-R90B
9745	METALLICA	Cosmic	28,4	5502-B
9719	METALLICA	Eclipse	11,3	8502-B
9753	METALLICA	Energy	56,3	2502-G
9339	METALLICA	Moon	47,9	3005-Y50R
8625	METALLICA	Naiade	19,2	4040-B
8257	METALLICA	Nyx	28,0	4030-Y20R
8623	METALLICA	Sedna	22,5	4030-G50Y
9310	METALLICA	Tethys	28,1	4502-Y
8624	METALLICA	Triton	16,8	7010-B90G
2746	METALLICA	Ymir	23,9	5030-Y50R
2741	NEOPOLIS	Brooklyn	14,9	7502-B
2743	NEOPOLIS	Central Park	52,3	2005-Y30R
2740	NEOPOLIS	Harlem Soft	30,0	4500-N
2745	NEOPOLIS	Plaza	53,8	2002-B
2744	NEOPOLIS	Queens Soft	29,4	4005-Y50R
2742	NEOPOLIS	Times Square	14,9	7005-Y50R
4365	OSMOZ	Alpaga New	52,2	2002-Y
4349	OSMOZ	Angora	42,2	3005-Y50R
4527	OSMOZ	Bamboo	49,4	1060-G50Y
8073	OSMOZ	Cocoa	10,8	7005-Y50R
7735	OSMOZ	Coffee Brown	16,9	6005-Y50R
0356	OSMOZ	Denim	16,3	5030-R80B
4350	OSMOZ	Elefant	33,1	3500-N
4351	OSMOZ	Greige	25,8	5005-Y50R
7108	OSMOZ	Grenadine	15,3	2070-Y90R
4364	OSMOZ	Ivory New	61,1	1502-Y
0702	OSMOZ	Kumquat	33,7	2050-Y50R
7204	OSMOZ	Mimosa	61,7	1050-Y10R
4496	OSMOZ	Pacific Blue	37,0	1040-B
7737	OSMOZ	Pepper Grey	9,4	8000-N
3791	OSMOZ	Slate Grey	21,7	5500-N
3792	OSMOZ	Storm Grey	36,3	3502-B
8627	POESY	Allegorie	24,8	3030-B10G
2747	POESY	Ballade	43,8	2005-Y50R
2750	POESY	Ellipse	45,1	2502-B
7109	POESY	Idylle	34,2	3020-R10B
2752	POESY	Litote	15,0	6502-B
2749	POESY	Lyrique	16,6	6005-Y20R
8621	POESY	Ode	50,0	1515-B50G
2748	POESY	Refrain	28,8	4005-Y50R
8626	POESY	Rime	20,3	5020-B
2751	POESY	Slam	30,7	4500-N




POESY - 2750 Ellipse



OSMOZ - 4350 Elefant

CODE	DÉCOR	COLORIS	TARALAY PREMIUM COMPACT	TARALAY PREMIUM CONFORT	ATTRACTION®
3734	Brazilia	Almerim	•	•	•
8577	Brazilia	Amazonas	•	•	•
4329	Brazilia	Bacabal	•	•	•
8386	Brazilia	Boa Vista	•	•	•
3709	Brazilia	Ceara	•	•	•
4478	Brazilia	Copacabana	•	•	•
8157	Brazilia	Goiás	•	•	•
8269	Brazilia	Ipanema	•	•	•
4342	Brazilia	Juara	•	•	•
4477	Brazilia	Maceio	•	•	•
3707	Brazilia	Paraíba	•	•	•
8736	Brazilia	Recife	•	•	•
4136	Brazilia	Sao Luis	•	•	•
4135	Indiana	Aldabra	•	•	•
8053	Indiana	Anambra	•	•	•
8150	Indiana	Bali	•	•	•
7517	Indiana	Faroe	•	•	•
8226	Indiana	Fidji	•	•	•
4015	Indiana	Guinea	•	•	•
8194	Indiana	Kornati	•	•	•
4526	Indiana	Lasia	•	•	•
4002	Indiana	Manua	•	•	•
8850	Indiana	Maupiti	•	•	•
4146	Indiana	Moheli	•	•	•
3788	Indiana	Nauru	•	•	•
8059	Indiana	Nicobar	•	•	•
4001	Indiana	Ofu	•	•	•
4004	Indiana	Pago	•	•	•
4469	Indiana	Pemba	•	•	•
4142	Indiana	Penang	•	•	•
8262	Indiana	Rodrigues	•	•	•
8470	Indiana	Samoa	•	•	•
8837	Indiana	Songo	•	•	•
8256	Indiana	Tahaa	•	•	•
4003	Indiana	Tao	•	•	•
4343	Indiana	Tokelau	•	•	•
4009	Indiana	Tufoa	•	•	•
4476	Indiana	Wattaru	•	•	•
9745	Metallica	Cosmic	•	•	•
9719	Metallica	Eclipse	•	•	•
9753	Metallica	Energy	•	•	•
9330	Metallica	Moon	•	•	•
8625	Metallica	Naiade	•	•	•
8257	Metallica	Nyx	•	•	•
8623	Metallica	Sedna	•	•	•
9310	Metallica	Tethys	•	•	•
8624	Metallica	Triton	•	•	•
2746	Metallica	Ymir	•	•	•
2741	Neopolis	Brooklyn	•	•	•
2743	Neopolis	Central Park	•	•	•
2740	Neopolis	Harlem Soft	•	•	•
2745	Neopolis	Plaza	•	•	•
2744	Neopolis	Queens Soft	•	•	•
2742	Neopolis	Times Square	•	•	•
4365	Osmoz	Alpaga New	•	•	•
4349	Osmoz	Angora	•	•	•
4527	Osmoz	Bamboo	•	•	•
8073	Osmoz	Cocoa	•	•	•
7735	Osmoz	Coffee Brown	•	•	•
0356	Osmoz	Denim	•	•	•
4350	Osmoz	Elefant	•	•	•
4351	Osmoz	Greige	•	•	•
7108	Osmoz	Grenadine	•	•	•
4364	Osmoz	Ivory New	•	•	•
0702	Osmoz	Kumquat	•	•	•
7204	Osmoz	Mimosa	•	•	•
4496	Osmoz	Pacific Blue	•	•	•
7737	Osmoz	Pepper Grey	•	•	•
3791	Osmoz	Slate Grey	•	•	•
3792	Osmoz	Storm Grey	•	•	•
8627	Poesy	Allegorie	•	•	•
2747	Poesy	Ballade	•	•	•
2750	Poesy	Ellipse	•	•	•
7109	Poesy	Idylle	•	•	•
2752	Poesy	Litote	•	•	•
2749	Poesy	Lyrique	•	•	•
8621	Poesy	Ode	•	•	•
2748	Poesy	Refrain	•	•	•
8626	Poesy	Rime	•	•	•
2751	Poesy	Slam	•	•	•

PREMIUM

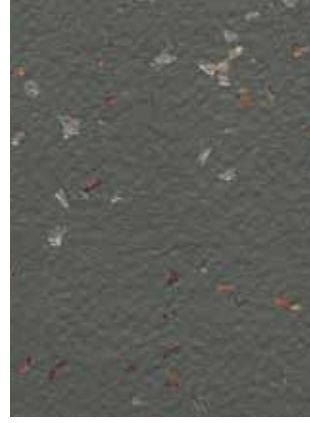

INDIANA - 8470 Samoa
👉👈👉👈



OSMOZ - 7737 Pepper Grey
👉👈



INDIANA - 8837 Songo
👉👈👉👈




POESY - 2752 Litote
👉👈




NEOPOLIS - 2741 Brooklyn
👉👈👉👈




METALLICA - 9719 Eclipse
👉👈

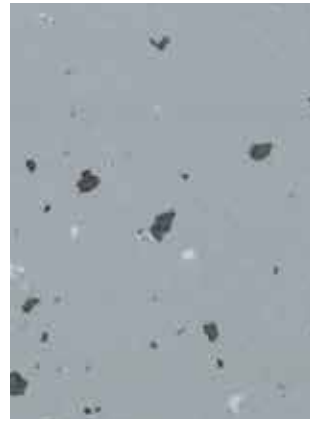

INDIANA - 4003 Tao*
👉👈👉👈

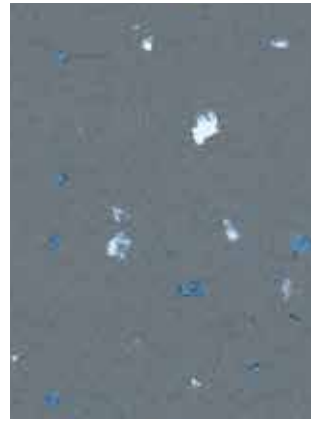

INDIANA - 4004 Pago*
👉👈

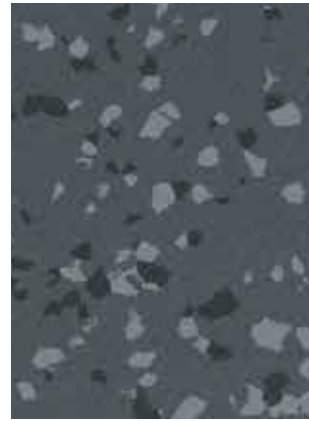


BRAZILIA - 3707 Paraiba
👉👈👉👈




OSMOZ - 3791 Slate Grey
👉👈



METALLICA - 9745 Cosmic
👉👈

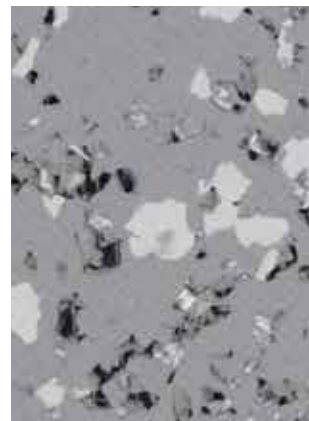


NEOPOLIS - 2740 Harlem Soft
👉👈👉👈

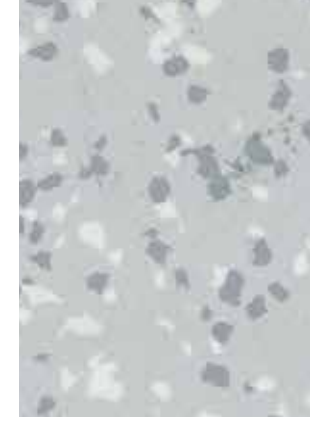

BRAZILIA - 8736 Recife
👉👈👉👈




POESY - 2750 Ellipse
👉👈

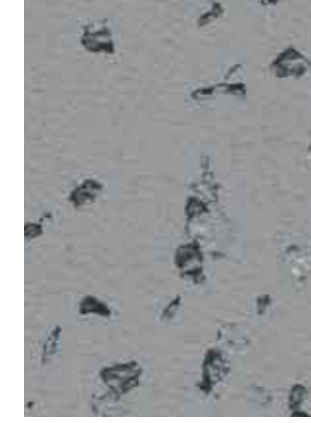

POESY - 2751 Slam
👉👈



METALLICA - 9310 Tethys
👉👈

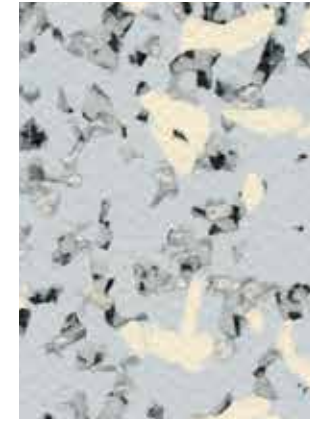

NEOPOLIS - 2745 Plaza
👉👈👉👈



BRAZILIA - 3709 Ceara
👉👈👉👈




OSMOZ - 3792 Storm Grey
👉👈



INDIANA - 8150 Bali
👉👈



METALLICA - 9753 Energy
👉👈

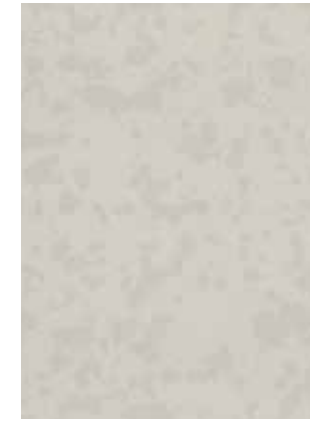


OSMOZ - 4365 Alpaga New
👉👈




INDIANA - 8226 Fidji
👉👈



OSMOZ - 4364 Ivory New
👉👈

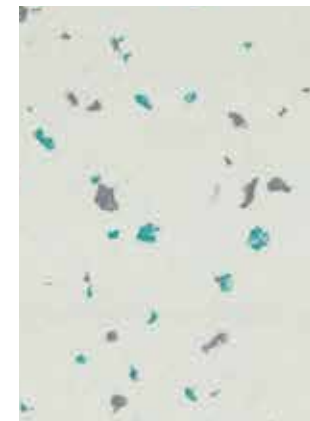

INDIANA - 4002 Manua
👉👈

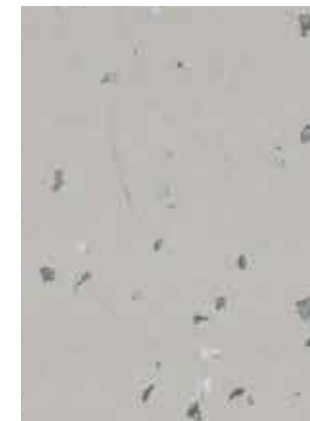

INDIANA - 3788 Nauru
👉👈




OSMOZ - 4350 Elefant
👉👈



INDIANA - 4001 Ofu
👉👈



OSMOZ - 4349 Angora

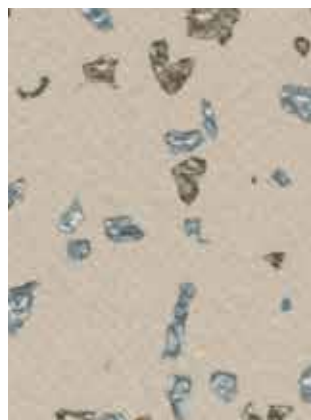


POESY - 2747 Ballade



OSMOZ - 8073 Cocoa



METALLICA - 9330 Moon

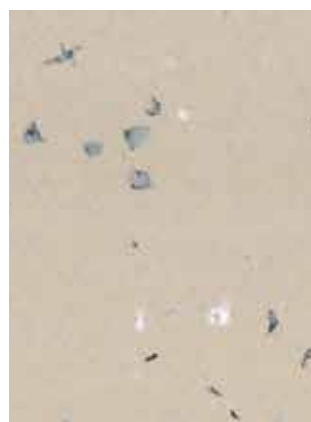

INDIANA - 4343 Tokelau*




METALLICA - 8257 Nyx



BRAZILIA - 3734 Almerim



BRAZILIA - 4342 Juara

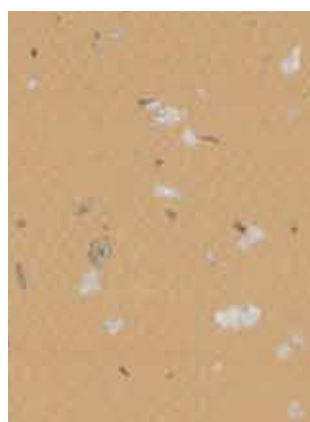

INDIANA - 8262 Rodrigues



INDIANA - 4009 Tufoa



BRAZILIA - 8386 Boa Vista



NEOPOLIS - 2744 Queens Soft

INTERIOR
DESIGNER



interiordesigner.gerflor.com

ÉCHANTILLONS /
SAMPLE



Rouleau
COMPACT /
Sheet without
foam backing
(COMPACT)



8 dB - 2 m

Rouleau
CONFORT /
Sheet with
foam backing
(COMFORT)



17 dB - 2 m
(16 dB Metallica)

ATTRACTION®
Renovation Tile




63.5 x 63.5 cm
Dalles
plombantes
amovibles /
Fast track
interlocking tiles

For welding rods
please refer to
gerflor.com

*See available colors

PREMIUM

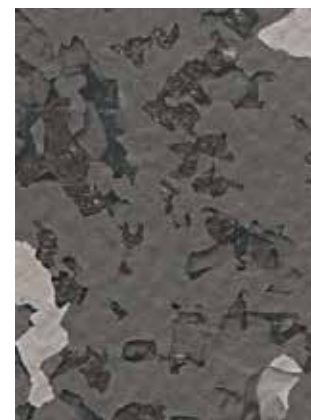


NEOPOLIS - 2742 Times Square




OSMOZ - 7735 Coffee Brown




OSMOZ - 0356 Denim

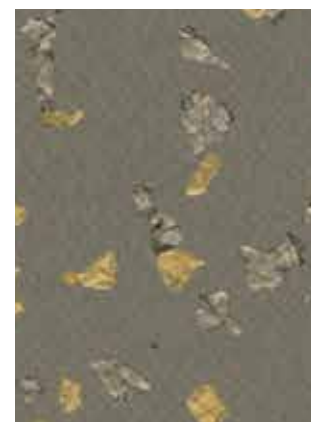

POESY - 2749 Lyrique

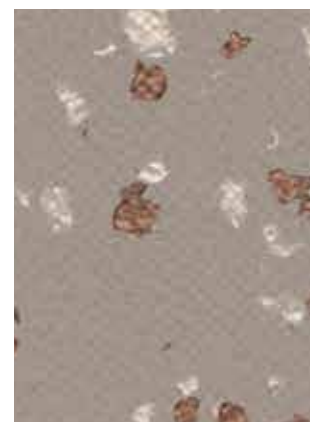

POESY - 2748 Refrain

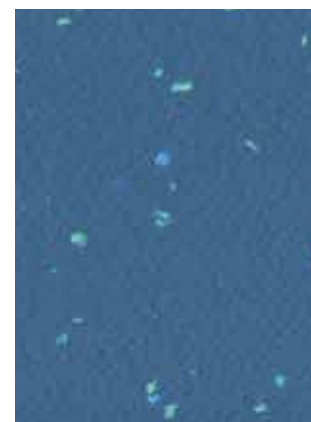


INDIANA - 4476 Wattaru



OSMOZ - 4351 Greige



BRAZILIA - 4329 Bacabal

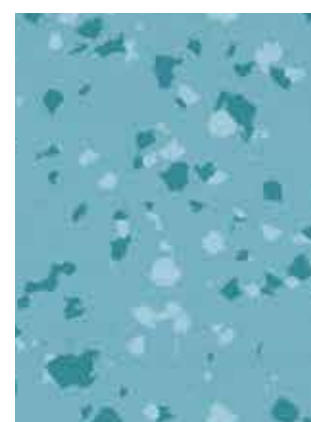

BRAZILIA - 4477 Maceio




METALLICA - 2746 Ymir




NEOPOLIS - 2743 Central Park



INDIANA - 8053 Anambas*

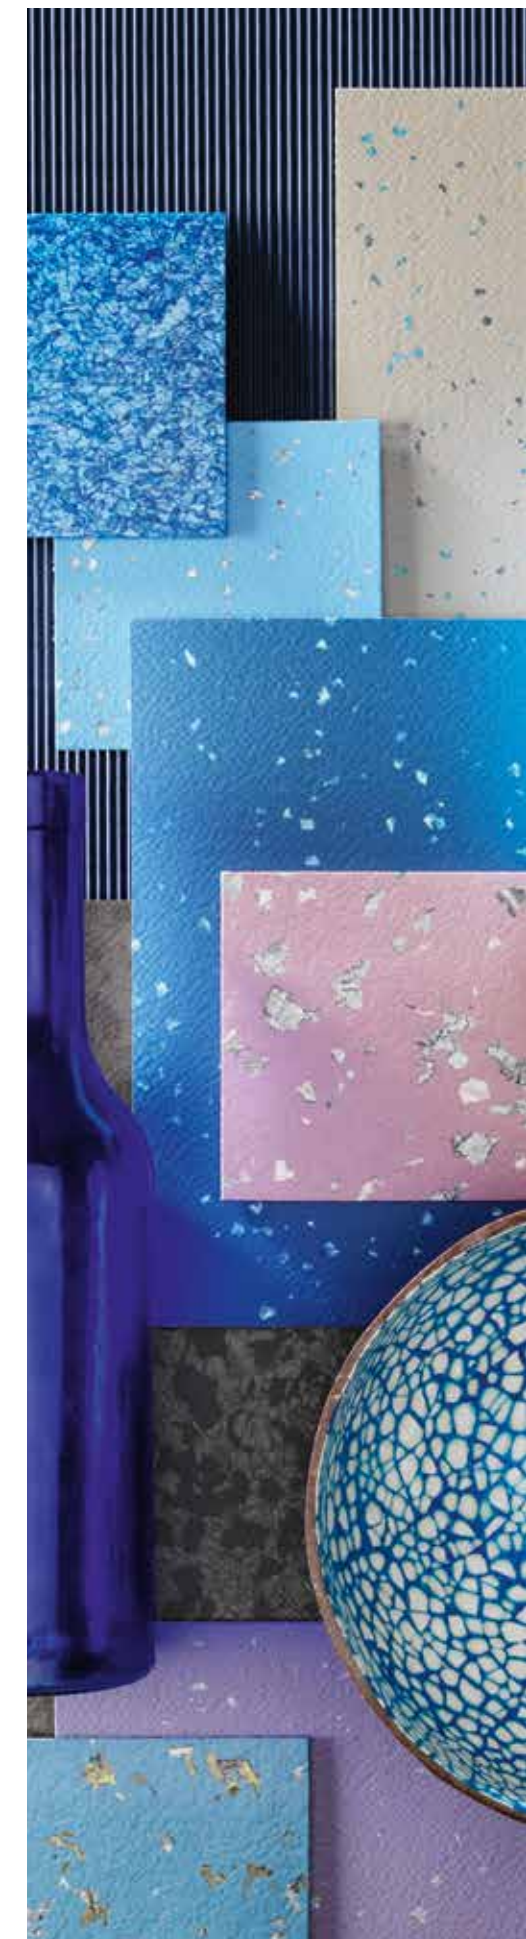

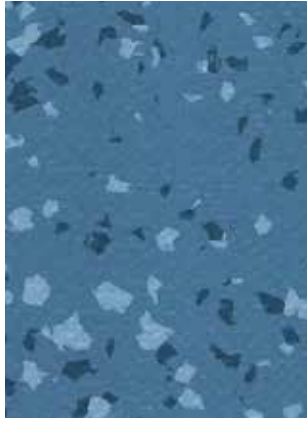

BRAZILIA - 4478 Copacabana



METALLICA - 8625 Naïade



POESY - 8626 Rime



INDIANA - 8850 Maupiti



OSMOZ - 4496 Pacific Blue




METALLICA - 8624 Triton



POESY - 8621 Ode



POESY - 8627 Allegorie

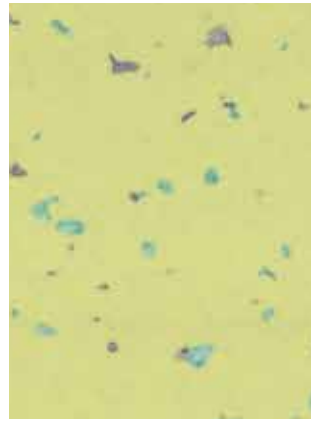

INDIANA - 4015 Guinea



INDIANA - 4135 Aldabra



POESY - 7109 Idylle



BRAZILIA - 8577 Amazonas



INDIANA - 4469 Pemba




METALLICA - 8623 Sedna



OSMOZ - 4527 Bamboo



OSMOZ - 7204 Mimosa

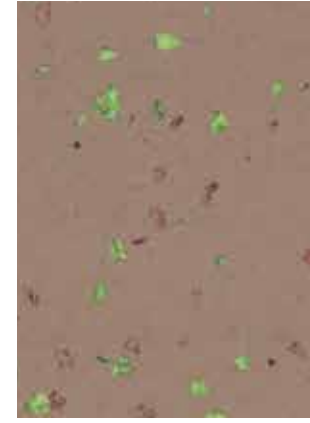

INDIANA - 8059 Nicobar




INDIANA - 7517 Faroe




INDIANA - 4526 Lasia




INDIANA - 8256 Tahaa

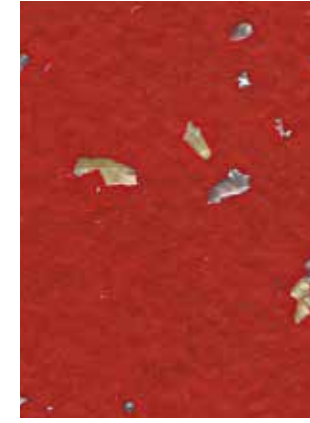

INDIANA - 8194 Kornati

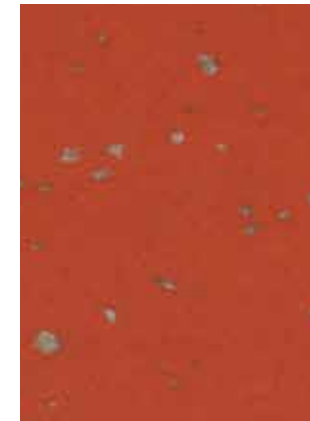

INDIANA - 4146 Moheli

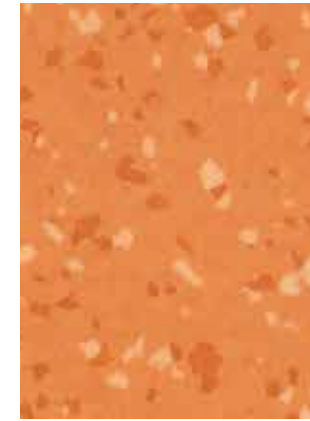


BRAZILIA - 8157 Goias



BRAZILIA - 8269 Ipanema



OSMOZ - 7108 Grenadine

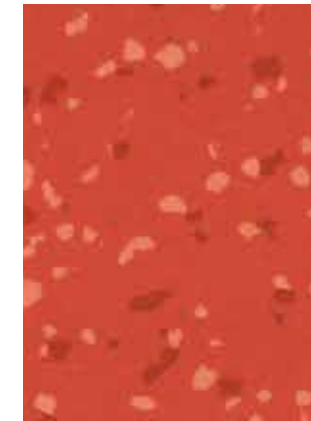

BRAZILIA - 4136 Sao Luis



INDIANA - 4142 Penang



OSMOZ - 0702 Kumquat



	PREMIUM COMPACT		PREMIUM COMFORT		ATTRACTION®
	Brazília – Indiana – Metallica – Osmoz – Poesy – Neopolis		Osmoz – Indiana – Metallica – Brazília – Poesy – Neopolis		
Description					
Total thickness	EN ISO 24346	mm	2.00	3.00-3.30	5.00
	ASTM F386-02	inch	0.08	0.12 - 0.13	-
Wearlayer thickness	EN ISO 24340	mm	≥ 1.02	≥ 1.02	1.00
	ASTM F410-02	inch	≥ 0.039	≥ 0.039	-
Weight	EN ISO 23997	g/sq.m	≥ 2580	≥ 2800	7460
	-	lbs/sq.ft	≥ 0.53	0.58	-
Width/ Length of sheet	EN ISO 24341	cm / lm	200 / 20	200 / 25	-
	-	feet - inch	6'6" / 66'	6'6" / 82'	-
Tile size	EN ISO 24342	mm	-	-	635 × 635 Connect 600 × 600 Cleantech (without dovetail) ⁽⁴⁾
Classification					
Norm / Product specification	-	-	EN ISO 10582	EN ISO 11638 (EN 651)	EN ISO 10582
European classification	EN ISO 10874	class	34 -43	34 -42	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1	Cfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10	R10
Performance					
Wear resistance	EN 660.2	mm ³	≤ 2.0	< 2.0	≤ 2
Wear group	NF 189	group	T	T	T
Type binder content	EN ISO 10582	type	I	-	I
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.15
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20	≤ 0.10
Residual indentation (measure)	-	mm	≈ 0.02	≈ 0.06	-
Impact sound insulation	EN ISO 717-2	dB	8	17 (Metallica : 16)	-
Castor chair test (type H)	ISO 4918	-	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	Evercare™	Evercare™
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK ⁽¹⁾	OK ⁽¹⁾	OK ⁽¹⁾
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99 % inhibits growth	> 99 % inhibits growth	-
Antiviral activity (Human coronavirus) after 2h ⁽²⁾	ISO 21702	-	> 99,7% virucidal activity	> 99,7% virucidal activity	-
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000-6	microgram/m ³	<10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®

CE Marking



EN 14041



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
(2) The implementation of an effective cleaning regime is the most important defence against infection.

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

! Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/03/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

we care / we act Our Commitments for a Sustainable future


CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025


BIO-SOURCED CONTENT**
10 % by 2025


RECYCLED CONTENT
30 % by 2025


ADHESIVE FREE***
35 % by 2025


ANNUAL VOLUME RECYCLED
60 000 t by 2025



* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution