


Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

## **TEST REPORT**

Client :	17 Cato Stre			Test Numbe Issue Date	r : :	19-00039 10/04/20	19
	Hawthorn Ea	ast VIC 3123		Print Date	:	10/04/201	9
Sample Description		Clients Ref : "Loftex" Vinyl flooring					
		Nominal Composition : PVC Nominal Mass per Unit Area/Density : Nominal Thickness : 2.5mm	1675g/m2				
S/ISO 9239.1-2003		Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source					
		Date of Sample Arrival		25/01/2019			
				25/01/2019 09/04/2019			
		Date of Sample Arrival	1	09/04/2019	3	Mean	
		Date of Sample Arrival Date Tested	1 7.4	09/04/2019 2	3 .4		kW/m²
		Date of Sample Arrival Date Tested CHF Value	-	09/04/2019 2	-	7.4	
		Date of Sample Arrival Date Tested CHF Value Length	7.4	09/04/2019 2 7.4 7 -	.4	7.4	
		Date of Sample Arrival Date Tested CHF Value Length Width	7.4 7.7	09/04/2019 2 7.4 7 - 2	.4	7.4	kW/m² kW/m² %.min
		Date of Sample Arrival Date Tested CHF Value Length Width Smoke Value	7.4 7.7 1	09/04/2019 2 7.4 7 - 2	.4 - 3	7.4 - Mean	kW/m² %.min
		Date of Sample Arrival Date Tested CHF Value Length Width Smoke Value Length	7.4 7.7 1 110	09/04/2019 2 7.4 7 - 2 88 10	.4 - 3 )8	7.4 - Mean 102	kW/m² %.min

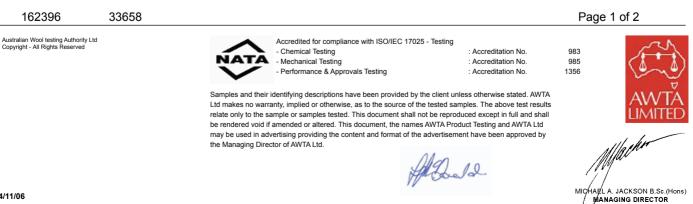

(C)

Α

APPROVED SIGNATORY



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

## **TEST REPORT**

Client : Gerflor Australasia Pty Ltd 17 Cato Street Hawthorn East VIC 3123

19-000391 Test Number : **Issue Date** 10/04/2019 ٠ **Print Date** 10/04/2019 •

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

HF30 not reported as flame out time occurred before 30 minutes.

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

162396

Australian Wool testing Authority Ltd Copyright - All Rights Reserved

33658



the Managing Director of AWTA Ltd.

Accredited for compliance with ISO/IEC 17025 - Testing - Chemical Testing Mechanical Testing Performance & Approvals Testing

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by

: Accreditation No Accreditation No · Accreditation No

983 985 1356

Page 2 of 2





C