


Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

## **TEST REPORT**

Client :	17 Cato Stre				Test Numbe Issue Date	r: :	18-00236 15/05/20 <sup>-</sup>	18
Hawthorn		ast VIC 3123			Print Date	:	15/05/201	8
Sample Description		Clients Ref : "Recreation 45" Vinyl Floorcovering						
		Nominal Composition : Nominal Mass per Unit A Nominal Thickness :	100% PVC with area/Density : 4.5mm	closed cell fo 2.6Kg/m2	oam backing			
5/ISO 9239.1-2003		Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source						
		Date of Sample Arrival			02/05/2018			
		Date Tested 14/05/2018						
		CHF Value		1	2	3	Mean	
		CHF Value Non Directional		1 5.3		3 4.9	Mean 5.1	kW/m²
				-				kW/m²
		Non Directional		5.3	5.1 <sup>4</sup> 2	.9	5.1	kW/m² %.min
		Non Directional Smoke Value		5.3	5.1 <sup>4</sup> 2	.9 3	5.1 Mean	
		Non Directional Smoke Value Non Directional		5.3	5.1 <sup>4</sup> 2	.9 3	5.1 Mean 268	

Α

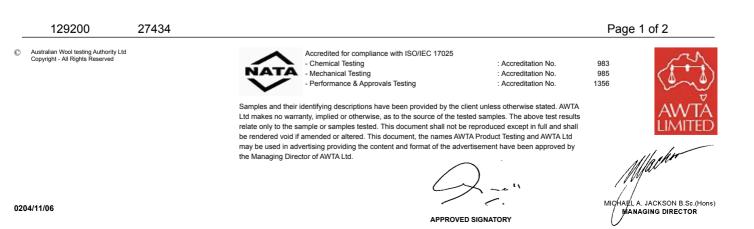



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

## **TEST REPORT**

Client : Gerflor Australasia Pty Ltd 17 Cato Street Hawthorn East VIC 3123 

 Test Number
 18-002368

 Issue Date
 15/05/2018

 Print Date
 15/05/2018

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

No directional properties, three specimens tested only.

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

129200

27434

 Australian Wool testing Authority Ltd Copyright - All Rights Reserved



the Managing Director of AWTA Ltd.

Accredited for compliance with ISO/IEC 17025 - Chemical Testing - Mechanical Testing - Performance & Approvals Testing

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by

: Accreditation No. : Accreditation No. : Accreditation No.

lo. 983 lo. 985 lo. 1356

Page 2 of 2



