

***POWERSHOCK***  
HIGH IMPACT RUBBER SOLUTIONS

---



**Gerflor**<sup>®</sup>  
theflooringgroup

# High Impact Rubber



## POWERSHOCK

300

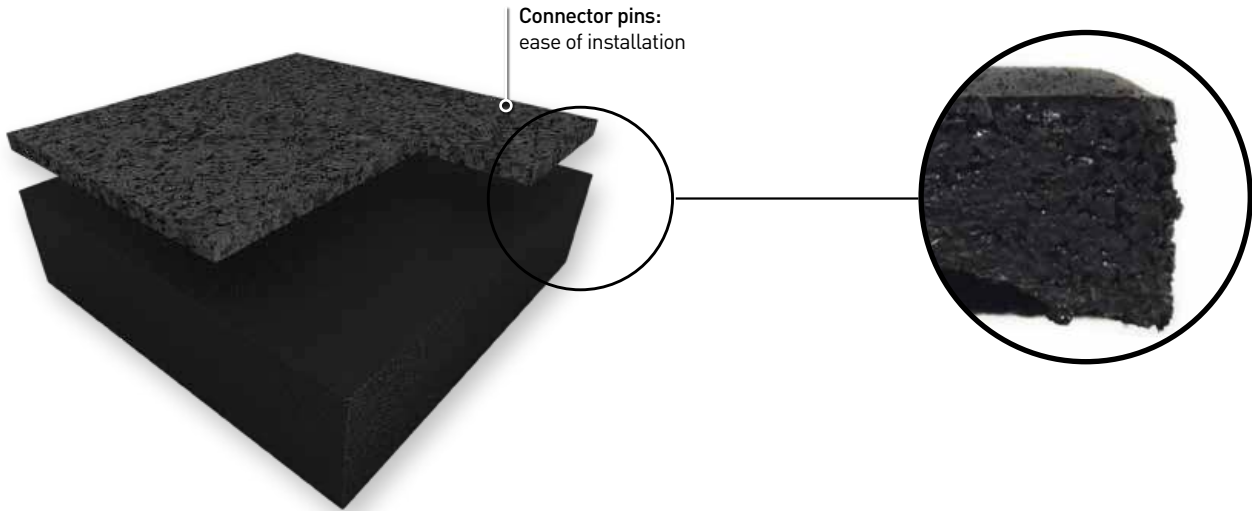

TILES WITH  
PRE-INSTALLED  
CONNECTOR PINS

**30 MM HIGH IMPACT RUBBER**  
*POWERSHOCK 300 avoids deep-impact damage while providing outstanding sound deadening as well*

- ✓ Shock absorption
- ✓ Sound insulation 26 dB
- ✓ Protection of subfloor

DARK GREY



**CROSSFIT & FREE-WEIGHT AREA**



## POWERSHOCK

300

CROSSFIT & FREE-WEIGHT AREA

### DESCRIPTION

Thickness	NF EN ISO 24346	mm	30
Weight	NF EN ISO 23997	Kg/m <sup>2</sup>	27
Size	NF EN ISO 24342	mm	500 x 500

### CLASSIFICATION

Fire resistance	EN 13501-1	class	Cfl,s1
Slip resistance	DIN 51130	class	R9

### PERFORMANCE

Dimensional stability	NF EN ISO 23999	%	<0,1
Abrasion	EN ISO 5470-1	g	1,5
Light resistance	EN ISO 20105 - A02	degree	3
Indentation resistance	EN 1516	mm	0.12
Slip resistance in dry condition	EN 13036-4	unit	104
Sound insulation	EN ISO 717/2	dB	26
Tensile strength	EN ISO 1798	MPa	0,7
Elongation at break	EN ISO 1798	%	70
Hardness shore A	Int.	-	60
Shock absorption	EN14808	%	49

**Gerflor**

Be connected!



www.gerflor.com

#Gerflor

#### FRANCE:

Gerflor - Service Express:

N°Azur 0 810 569 569 N°Azur FAX 0 810 569 570

e-mail: contactfrance@gerflor.com

#### OTHER COUNTRIES:

Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

**Gerflor**  
theflooringgroup