







0357 PORTOBELLO \bigcirc 6" x 36"



0561 CARASSI \$\sigma 9" x 36"





0064 GRAVITY DARK 7.244" x 48"







0340 BUXTON OAK 6" x 36"









 6" x 36" 0265 WALNUT







0096 NAPA



 6" x 36" 0545 SERENA



 6" x 36" 0093 LARCH



 6" x 36" 0335 SYCAMORE



7.244" x 48" 0573 LAWSON



0535 DOUGLAS 6" x 36"



0556 CLIFTON

0538 MIDWEST



6" x 36"



0552 TANAMI



0329 LIMED OAK





7.244" x 54" 0576 OCEANSIDE



0529 SOMERSET



0709 BARMA COSY 19.69" x 19.69"



0021 BARMA SWEET 19.69" x 19.69"



0023 BARMA MYSTERY → 19.69" x 19.69"



0515 KALBARI




0402 GREENWICH





0531 HALIFAX

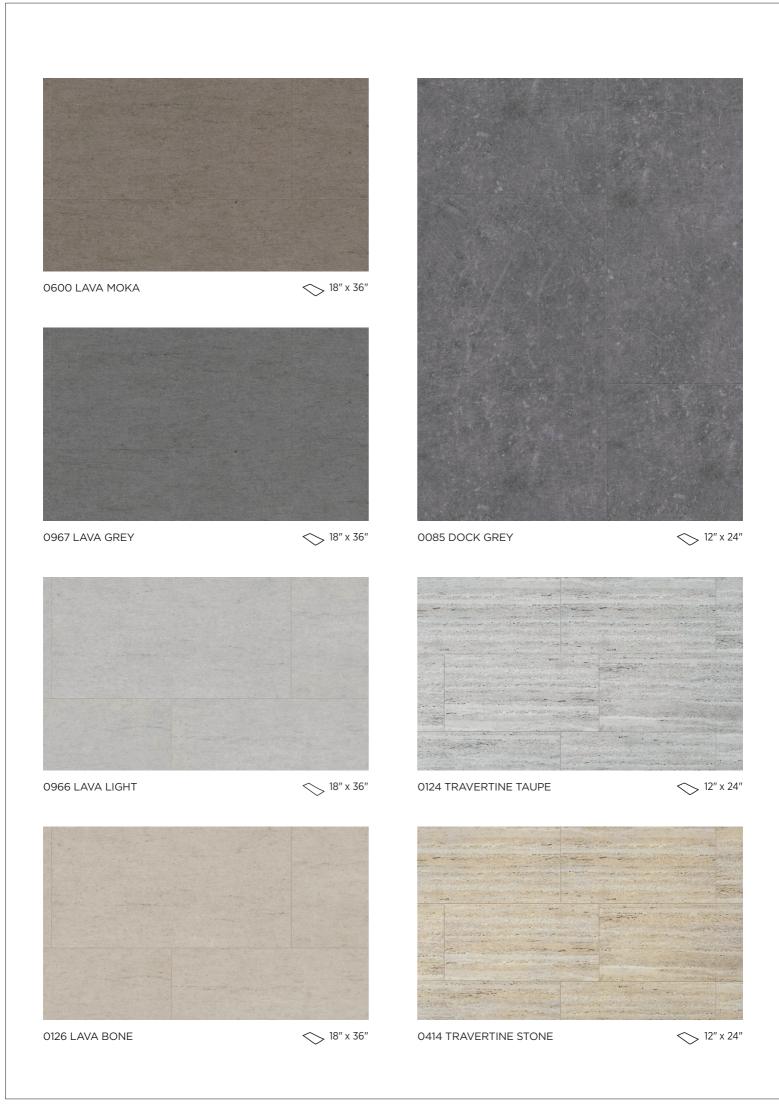

DESCRIPTION	STANDARDS	REQUIREMENTS	PLANKS & TILES				
PRODUCT DESCRIPTION							
Reference Specification	ASTM F1700	-	Class III Type B				
Gauge Total Thickness	ASTM F386	-	0.1" (2.5 mm)				
Wearlayer Thickness	ASTM F410	-	28 mil (0.7 mm)				
Surface Treatment / Maintenance	-	-	PUR+				
Backing	ASTM F1303	-	100% recycled material				
Plank and Tile Sizes	-	-	4" x 36"; 6" x 36"; 9" x 36"; 18" x 36"; 7.244" x 48"; 7.244" x 54 18" x 18"; 19.69" x 19.69"; 24" x 24"; 12" x 24"; Mix: 3", 6", 9" x 3				
Weight	-	-	0.9 lbs/ft² (4.4 kg/m²)				
PERFORMANCE							
Static Load (250 psi)	ASTM F970	≤ 0.005"	Meets Requirements				
Indentation – Residual (75 lbs)	ASTM F1914	≤ - 8%	< -0.003" (-3%) Meets Requirements				
Coefficient of Friction	ASTM D2047	-	0.65 (Dry)				
Dimensional Stability	ASTM F2199	< 0.02"	Meets Requirements				
Flexibility	ASTM F137	> 1.5"	Meets Requirements				
Chemical & Stain Resistance (5 min and 24 hours)	ASTM F925	-	Meets Requirements				
Impact Insulation Class (IIC)	ASTM E989 (ASTM E492)	-	40 dB				
Fire Rating	ASTM E648	Class I	Class 1				
Smoke Density (Flaming and Non-Flaming)	ASTM E662	-	Meets Requirements				
ENVIRONMENT HEALTH & SAFETY							
Naturally Bacteriostatic: Combats MRSA, E. coli, and S. aureus*	ISO 22196	-	Inhibits spread of infection at 99%				
Allergen-Free	-	-	100% Allergen-Free				
Plant Certifications	-	-	ISO 14001, ISO 9001				
Production Waste	-	-	100% Manufacturing Waste Recycled				
End of Life	-	-	100% Recyclable				
MATERIALS & RESOURCES: BUILDING PRODUCT DISCLOSURE	& OPTIMIZATION (BPDO)						
Sourcing of Raw Materials: Recycled Content	MR 4 LEED v3		35%				
	Sourcing LEED v4	-					
Restriction of Harmful Chemicals	Materials LEED v4	-	100% REACH Compliant				
Environmental Product Declaration (EPD)	EPD LEED v4	-	Product-Specific Type III EPD				
Health Product Declaration (HPD)	Materials LEED v4	-	Self Declared				
MATERIALS & RESOURCES: INDOOR ENVIRONMENTAL QUALIT	Y (IEQ)						
	IEQ 4.3 LEED v3		FloorScore® Certified				
Indoor Air Quality / Low Emitting Materials	IEQ Option 1 LEED v4	_					
TVOC after 28 days	ISO 16000-6	-	<10 µg/m³				
WARRANTY	12-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on gerflorusa.com.						

 $^{{}^*\}mathsf{The}$ implementation of an effective cleaning method is the best defense against infections.

FORMAT OF PLANKS / TILES		NUMBER OF	COVERAGE PER BOX		WEIGHT/BOX	
СМ	INCH	UNITS PER BOX	SQ M	SQ FT	KG	LBS
10.16 x 91.4	4" x 36"	36	3.34	35.95	13.36	29.45
15.2 x 91.4	6" x 36"	24	3.34	35.95	14.86	32.76
18.4 x 121.9	7.244" x 48"	15	3.37	36.28	15.35	33.84
Mix: 7.6 / 15.2 / 22.8 x 91.4	Mix: 3" / 6" / 9" x 36"	24	3.34	35.95	14.86	32.76
18.4 x 137.1	7.244" x 54"	12	3.03	32.62	13.70	30.20
22.8 x 91.4	9" x 36"	16	3.34	35.95	15.00	33.07
45.7 x 91.4	18" x 36"	8	3.34	35.95	14.97	33.00
50 x 50	19.69'' x 19.69''	14	3.5	37.67	15.25	33.62
61 x 61	24" x 24"	9	3.34	35.95	15.26	33.64
30.5 x 61	12" x 24"	18	3.34	35.95	15.27	33.66
45.7 x 45.7	18" x 18"	16	3.34	35.95	15.70	34.61





















CREATION 28





CREATION 28

LVT made for high-traffic commercial application.

2.5 mm thick with 28 mil (0.7 mm) wearlayer with PUR+ polyurethane surface treatment.

REFERENCE SPECIFICATION Meets ASTM F1700 CLASS III TYPE B

INSTALLATION GerFix LVT & Plank Spray Adhesive recommended

SPRAY ADHESIVE



FULL SPREAD ADHESIVE







