


## ENVIRONMENTAL PRODUCT DECLARATION

# TARALAY IMPRESSION HOP COMPACT

MULTI-LAYERED VINYL FLOORCOVERING

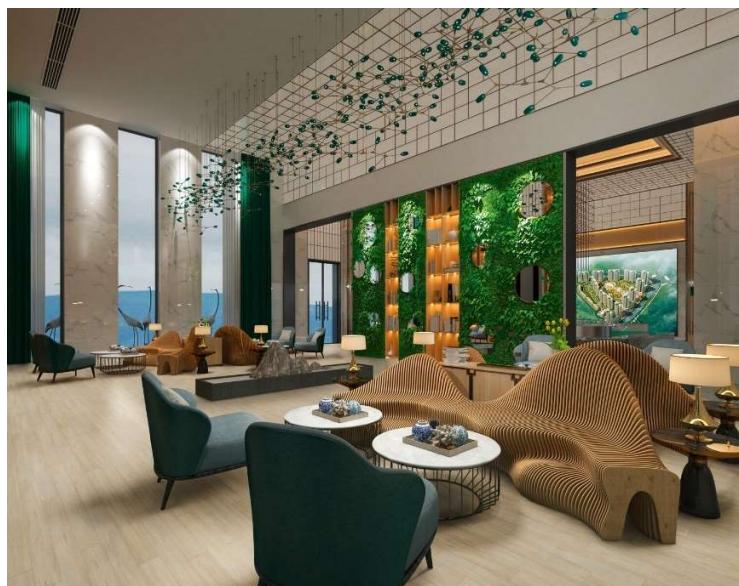

Taralay Impression Hop Compact

# Gerflor®

Our mission at Gerflor: make our customers and users' lives easier with sustainable innovative, healthy, and less impactful products.

When it comes to sustainability, we set ourselves to the highest standards. As part of this commitment, Gerflor has decided to take a leadership position with a goal of publishing a third-party independently verified EPD for each of its product ranges

The product covered by this EPD is Taralay Impression Hop Compact.

It is a multi-layered vinyl floorcovering, integrating a double fiber frame and a printed design. It can be laid gluefree onto various existing supports, including asbestos, with holding tape under joints. Without any glue, its end life removal is fast and easy. The Gerflor holding tape doesn't affect the support, to ease renovation. Re-use of the floorcovering, recycle or renovation are then facilitated.

Since 2011, Gerflor offers an innovative program in select countries for collecting installation waste and end-of-life products. Once collected, those products are sent to a recycling center.

The recyclate is then reintegrated in Gerflor factories into new products, to close the circularity loop.



# ENVIRONMENTAL PRODUCT DECLARATION



## TARALAY IMPRESSION HOP COMPACT

According to ISO 14025  
and EN 15804



EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL Environment 333 Pfingsten Road, Northbrook, IL 60611	<a href="https://www.ul.com/">https://www.ul.com/</a> <a href="https://spot.ul.com">https://spot.ul.com</a>
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions v.2.4 July 2018	
MANUFACTURER NAME AND ADDRESS	GERFLOR 1 Place Verrazzano, CS 20458, 69258 Lyon CEDEX 09	
DECLARATION NUMBER	UL Provided	
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	TARALAY IMPRESSION HOP COMPACT	
REFERENCE PCR AND VERSION NUMBER	PCR -Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4.0, UL Environment. PCR - Part B: Flooring EPD Requirements, Second Edition, Dated September 28, 2018, UL Environment.	
DESCRIPTION OF PRODUCT APPLICATION/USE	The product is to be installed in various areas of application including commercial and industrial applications. It is classified in accordance with EN ISO 10874 and in reference to the FCSS (Floor Covering Standard Symbols)	
PRODUCT RSL DESCRIPTION (IF APPL.)	The product service life recommended is 25 years. According to UL PCR, the building Estimated Service Life (ESL) is 75 years. For this duration, two replacements are required Environmental impacts are calculated for two different Service Life assumptions: 1 year and 75 years.	
MARKETS OF APPLICABILITY	European commercial market	
DATE OF ISSUE	UL Provided	
PERIOD OF VALIDITY	5 years	
EPD TYPE	Product-specific	
VARIABILITY OF REPORTED DATA	1 product(s) is considered in this EPD.	
EPD SCOPE	Cradle to Grave	
YEAR(S) OF REPORTED PRIMARY DATA	2023	
LCA SOFTWARE & VERSION NUMBER	Simapro 9	
LCI DATABASE(S) & VERSION NUMBER	Ecoinvent 3.8 – allocution cut-off by classification	
LCIA METHODOLOGY & VERSION NUMBER	Method EN 15804 A2 EPD Ev-DEC 1.11 (EVEA)	

The PCR review was conducted by:

This declaration was independently verified in accordance with ISO 14025: 2006.

INTERNAL

EXTERNAL

This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:

### LIMITATIONS

**Exclusions:** EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

**Accuracy of Results:** EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

**Comparability:** EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible". Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## TABLE OF CONTENTS

1.	Product Definition and Information .....	5
1.1.	Company Description and production site information .....	5
1.2.	Product Description .....	5
1.3.	Technical Specifications .....	5
1.4.	Product Certifications .....	6
1.5.	Product Classifications .....	6
2.	Life Cycle Assessment General Information .....	7
2.1.	Methodological Framework .....	7
2.2.	Declared Unit .....	8
2.3.	System Boundary .....	8
2.4.	Estimates and Assumptions .....	8
2.5.	Cut-off Criteria .....	8
2.6.	Data Sources .....	9
2.7.	Data Quality .....	9
2.8.	Period under Review .....	9
2.9.	Allocation .....	9
2.10.	Comparability (Optional) .....	10
3.	Life Cycle Assessment Background Information & Scenarios .....	11
3.1.	Material Composition & packaging (A1) .....	11
3.2.	Manufacturing (A3) .....	11
3.3.	Delivery (transport from the factory to the building site) (A4) .....	11
3.4.	Installation (A5) .....	12
3.5.	Use - Reference Service Life and Building Estimated Service Life (B2) .....	13
3.6.	Use – Cleaning (B2) .....	13
3.7.	Repair, replacement, refurbishment, reuse (B3-B5) .....	14
3.8.	Operational energy use (B6) and Operational water use (B7) .....	14
3.9.	Deconstruction (C1) .....	14
3.10.	Transport (C2) and end-of-life (C3-C4) .....	14
3.11.	Benefits and loads beyond system boundary (D) .....	15
4.	Life Cycle Assessment Results for Europe .....	16
4.1.	Summary of key GWP results .....	16
4.2.	Life Cycle Assessment – Environmental impacts .....	17
4.2.1.	Environmental impacts for 1 year .....	17
4.2.1.1.	Potential environmental impact in case of RECYCLING at end of use .....	17

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



4.2.1.2. Potential environmental impact in case of LANDFILL at end of use.....	18
4.2.1.3. Potential environmental impact in case of INCINERATION at end of use .....	19
4.2.2. Environmental impacts for 75 years .....	20
4.2.2.1. Potential environmental impact in case of RECYCLING at end of use .....	20
4.2.2.2. Potential environmental impact in case of LANDFILL at end of use.....	21
4.2.2.3. Potential environmental impact in case of INCINERATION at end of use .....	22
4.3. Life Cycle Assessment – Resources, wastes categories and outgoing flows .....	23
4.3.1. Resources, wastes categories and outgoing flows for 1 year.....	23
4.3.1.1. Resources, waste categories and outgoing flows in case of RECYCLING at end of use.....	23
4.3.1.2. Resources, waste categories and outgoing flows in case of LANDFILL at end of use.....	24
4.3.1.3. Resources, waste categories and outgoing flows in case of INCINERATION at end of use .....	25
4.3.2. Resources, waste categories and outgoing flows for 75 years.....	26
4.3.2.1. Resources, waste categories and outgoing flows in case of RECYCLING at end of use.....	26
4.3.2.2. Resources, waste categories and outgoing flows in case of LANDFILL at end of use.....	27
4.3.2.3. Resources, waste categories and outgoing flows in case of INCINERATION at end of use .....	28
4.4. Life Cycle Assessment – Carbon emissions and removals .....	29
4.4.1. Carbon emissions and removals for 1 year.....	29
4.4.1.1. Carbon emissions and removals in case of RECYCLING at end of use .....	29
4.4.1.2. Carbon emissions and removals in case of LANDFILL at end of use .....	30
4.4.1.3. Carbon emissions and removals in case of INCINERATION at end of use .....	31
4.4.2. Carbon emissions and removals for 75 years.....	32
4.4.2.1. Carbon emissions and removals in case of RECYCLING at end of use .....	32
4.4.2.2. Carbon emissions and removals in case of LANDFILL at end of use .....	33
4.4.2.3. Carbon emissions and removals in case of INCINERATION at end of use .....	34
5. Additional Environmental Information.....	35
5.1. Environment and Health During Manufacturing.....	35
5.2. Environment and Health During Installation .....	35
5.3. Environment and Health During the use stage.....	35
6. References .....	35

# ENVIRONMENTAL PRODUCT DECLARATION

According to ISO 14025  
and EN 15804



**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

## 1. Product Definition and Information

### 1.1. Company Description and production site information

The products are commercialized by Gerflor.

For over 80 years, the Gerflor Group has been developing, manufacturing and selling innovative, decorative and eco-responsible solutions. Its product portfolio encompasses flexible floors, wall protection and finishes. Gerflor supports professionals and individuals every day in every phase of their project, from product selection to end-of-life management and recycling solutions. As a European manufacturer, the Group employs more than 5000 people and distributes its products and services in over 100 countries.

Gerflor solutions can be found in Education, Healthcare, Retail, Sports, Hospitality, Industry, Offices, Transport, and Residential buildings.

Faced with the climate emergency and the scarcity of raw materials, the Group's ambition is now more than ever to reconcile sustainable and profitable growth with resolute and innovative approaches to reduce our environmental impact.


### 1.2. Product Description

This environmental product declaration covers **Taralay Impression Hop Compact**.

It is a decorative looselay flooring, available in rolls.

It is 100% recyclable and made with up to 20% of recycled content. It is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 10µg/m<sup>3</sup> (TVOC <28 days – ISO 16000-6).

The following figure shows Taralay Impression Hop Compact product constructions :

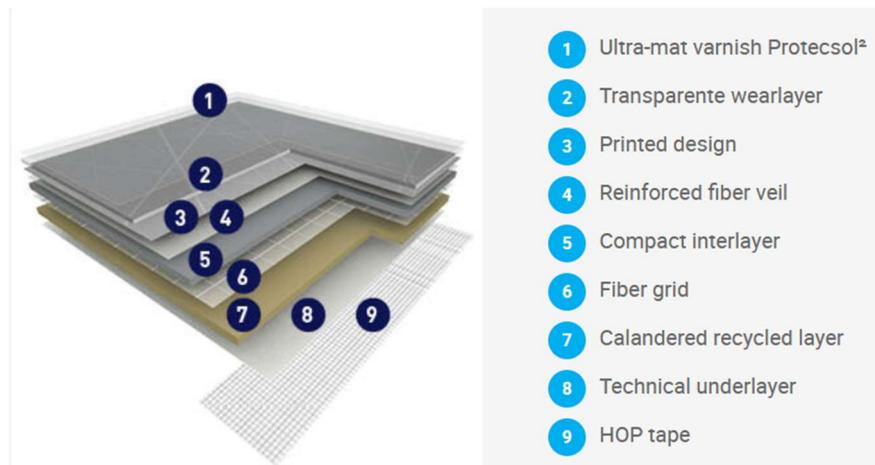

### 1.3. Technical Specifications

The product considered in this EPD meets or exceeds all technical requirements in NF EN ISO 10582 – Heterogeneous polyvinyl chloride floor covering.

The product meets the following technical specifications :

Name	Value	Unit
Product Thickness	2.3	mm
Product Weight	3.186	kg/m <sup>2</sup>
Density	1385	kg/m <sup>3</sup>

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## 1.4. Product Certifications

The products declared complies with the following codes or regulations :

- **Floorscore**

**Fire test** : Bfl-S1, class I (ASTM E648-08).

**Slip resistance** : R10

## 1.5. Product Classifications

The product is multi-layered vinyl floorcovering, classified in accordance in accordance with EN ISO 10874 : Resilient, textile and laminate floor coverings, and in reference to the FCSS (Floor Covering Standard Symbols) to be installed in various areas of application including commercial, education, healthcare and housing environments.

The product is classified according to the United Nations Standard Products and Service Code (UNSPSC) as « Vinyl Flooring »: UNSPSC Code 30161707. And according to Construction Specification Institute (CSI) as « Resilient flooring »: CSI Code 09 65 00.

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## 2. Life Cycle Assessment General Information


### 2.1. Methodological Framework

A full Life Cycle Assessment has been performed according to ISO 14040, ISO 14044 and in compliance with EN15804.

This EPD covers the entire life cycle of the products from cradle to grave (modules A1 to D) excluding modules for which there are no inputs/outputs.

No known flows are deliberately excluded from this EPD. For these products, the stated Reference Service Life (RSL) is 25 years (see section 0).

#### Flow Diagram :

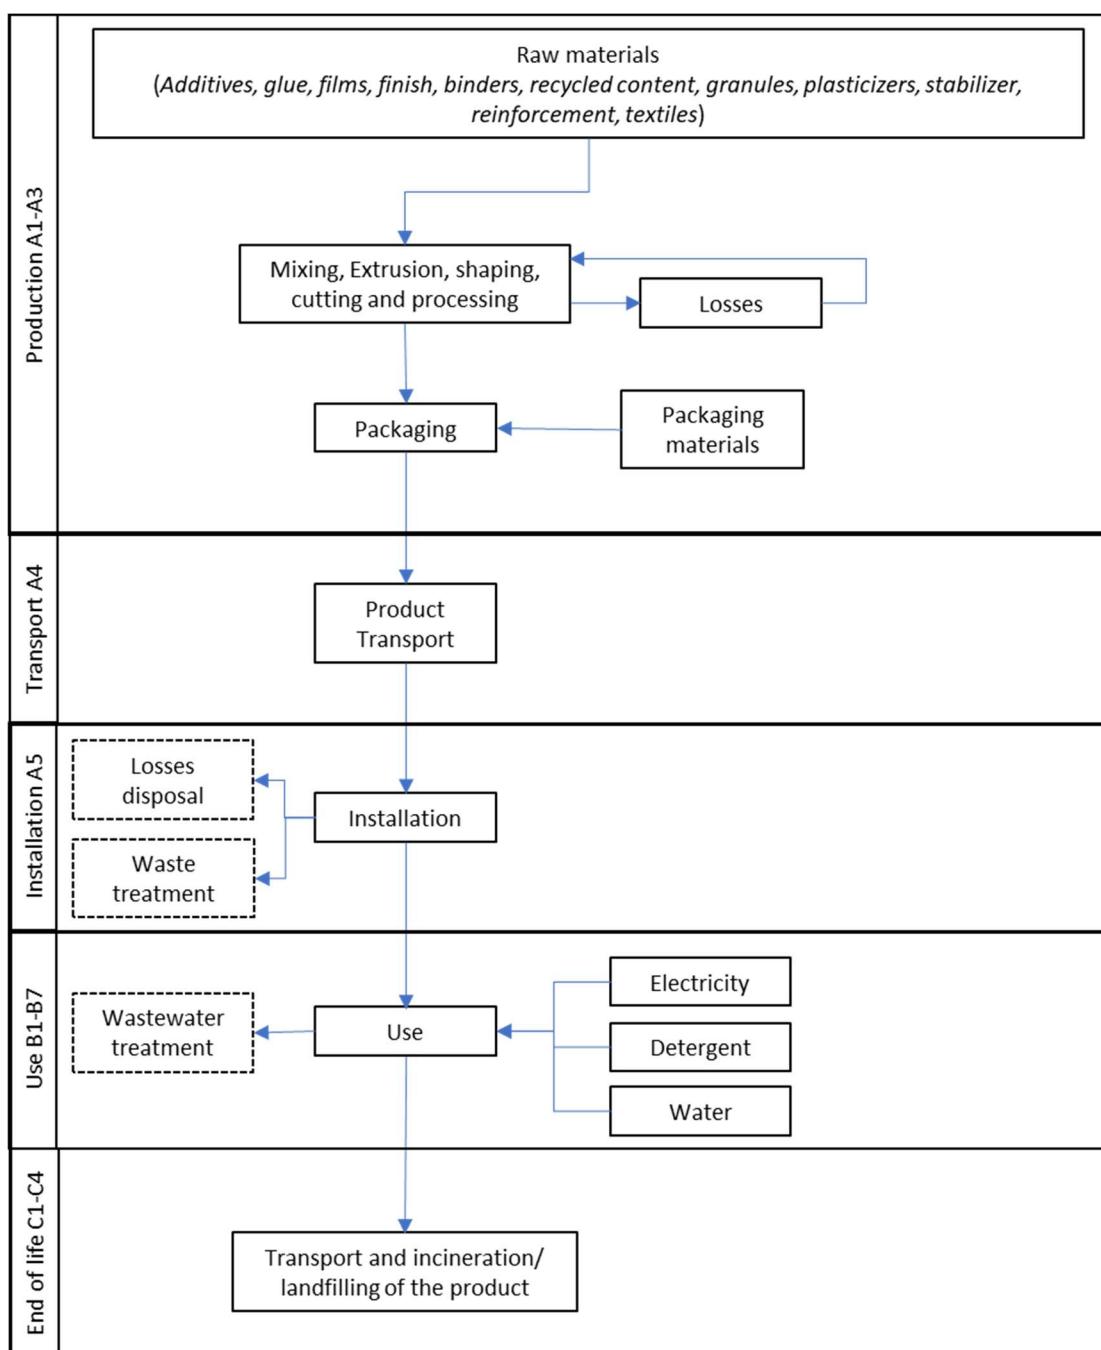

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## 2.2. Declared Unit

The functional unit is one square meter of installed product. The reference service life considered is 25 years.

	Value	Unit
Functional Unit	1	m <sup>2</sup>
Mass	3.186	kg

## 2.3. System Boundary

EPD is declared from cradle to grave, including the following stages:

**A1 – A3:** includes the provision of all raw materials and their packaging, transport to the production site and energyconsumption during the manufacturing of the product, as well as processing of waste generated by the factory.

**A4 – A5:** includes the transport from the factory to the final customer, packaging of the final product and the installationof the product, as well as all consumables and energy required, and processing of waste generated during the installation.

**B1 – B7:** includes provision and transport of all materials, products and services related to the use phase of the product,as well as their related energy and water consumption, and the processing of any resulting waste.

**C1 – C4:** includes provision and transport of all materials, products and services related to the end-of-life phase of theproduct, including energy and water consumption, as well as the end-of-life processing of the product.

**D:** includes benefits coming from the wastes' end of life.

Scope of study: modules with no “X” in the table below have been considered but have no associated inputs/outputs, therefore do not appear in the results:

Modules	Production Stage			ConstructionProcess Stage		Use Stage						End-of-Life Stage				Benefits& loads beyond syst. Bound.	
	Raw material supply	Transport to manufacturer	Manufacturing	Transport from gate to site	Assembly/Install	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use during product use	Operational water use during product use	Deconstruction	Transport	Waste processing	Disposal	
Accounted for:	X	X	X	X	X	X*	X	X*	X	X*	X*	X*	X*	X	X	X*	X
*	module has been considered but has no associated inputs/outputs, therefore does not appear in the results.																

## 2.4. Estimates and Assumptions

Estimates and assumptions are made for transport, installation, and deconstruction procedure. Details are provided in section 3.

## 2.5. Cut-off Criteria

The cut -off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of thatunit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

**Gerflor**TARALAY IMPRESSION  
HOP COMPACT

For this study, all input and output flows have been considered. Raw materials are included as per the product composition provided by the manufacturer and the packaging of the final product. Energy and water consumptions have also been considered at 100% according to the data provided.

## 2.6. Data Sources

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

To model the life cycle of the product in question, the software SimaPro 9, developed by PRé, has been used in conjunction with the LCA database ecoinvent v3.8.

## 2.7. Data Quality

The requirements for data quality and LCA data are in accordance with the specifications of the PCR.

**Temporal Coverage** – producer specific data is averaged over 1 year of production and from within the last 5 years (2023). Generic data is taken from the ecoinvent 3.8 database, the entirety of which was updated in 2021. Inputs and outputs from the system are accounted for over a period of 100 years from the year for which the data set is deemed relevant.

**Technological Coverage** – the technological coverage of the data reflects the physical reality of the declared product.

**Geographical Coverage** – whenever possible, country specific data reflecting the reality of the Gerflor supply chain has been used. If country specific data is unavailable, European regional data is used in preference to global data sources.

## 2.8. Period under Review

Data have been reviewed for the production year 2023.

## 2.9. Allocation

### Allocations when using secondary materials as raw materials:

The recycled content comes from external sources (offcuts from installation and removal of old coatings), the end-of-waste status is considered at the level of the sorted material stock and no impact is assigned to the production of these offcuts.

### Allocations in the plant (differentiation from other products manufactured in the plant):

The overall values for the factory's material and energy consumptions during a period of one year have been divided by the annual production of each product to supply a value per square meter of flooring produced. All factory data is measured in square meters, and it is assumed that the process consumptions are governed by area of flooring processed rather than mass.

### Allocation of multi-input processes if performed during modelling:

Production offcuts: the scraps are components reintegrated into other products on other process lines. Since these scraps are not sold externally, a physical allocation is made between the main product and the scraps. Thus, the overproduction to produce these losses is not considered in this case. The impacts of the production of these scraps are assigned to the system that uses them (other Gerflor products), so no impact is omitted.

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## Allocations of reuse, recycling and energy recovery:

Not relevant here.

### 2.10. Comparability (Optional)

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building context, respectively the product-specific characteristics of performance, are taken into account.

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## 3. Life Cycle Assessment Background Information & Scenarios

### 3.1. Material Composition & packaging (A1)

Product:

Component	Mass %
PVC	35-40%
Plasticizer	15-20%
Mineral filler	25-30%
Stabilizer	< 3%
Additive	< 1%
Pigments	< 1%
Finish	< 1%
Recycled content*	20%
Packaging	< 4%

#### \*Recycled content :

- 8.5% is post-consumer waste,
- 11.5% is pre-consumer waste.

#### Packaging:

The rolls are wrapped around a cardboard mandrel, and are protected by two cardboard discs. Then, the rolls are protected by kraft paper.

As described in ULE Part A Requirements, the packaging waste scenario for European market is:

- 76.4% recycling, 16.4% landfilling and 7.2% incineration for carboard
- 24.8% recycling, 54.8% landfilling and 20.4% incineration for wood
- 37% recycling, 35% landfilling and 28% incineration for plastic

### 3.2. Manufacturing (A3)

Taralay Impression Hop Compact is made in the Gerflor manufacturing plant in Saint-Paul-Trois Châteaux, in France. The production of the rolls is divided into the following stages:

- Mixing: binder, filler, plasticizer, stabilizer, additives and pigments are mixed to obtain mixture
- Coating: the rolls are then coated to get the desired shape.
- Reinforcement and finish.
- Surface treatment: the Protecsol<sup>2</sup> surface treatment is then applied to get the best durability
- Shaping: rolls are cut at the desired dimensions.

### 3.3. Delivery (transport from the factory to the building site) (A4)

Taralay Impression Hop Compact is made in France, and sent to the European market by truck. Distances taken in account are described below.

Truck	VALUE	UNIT
Fuel type	Diesel, low sulfur	
Liters of fuel	26	l/100km
Vehicle type	16-32 metric ton	EURO 6

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



Transport distance	687	km
Capacity utilization (including empty runs, mass based)	36	%
Gross density of products transported	4464	kg/m3
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m3
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nestedpackaging products)	<1	-
<b>Boat</b>		
Fuel type	Heavy Fuel Oil	
Liters of fuel	0.047	l/100km
Vehicle type	Transoceanic Ship	
Transport distance	69	km
Capacity utilization (including empty runs, mass based)	100	%
Gross density of products transported	4464	kg/m3
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m3
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nestedpackaging products)	<1	-

## 3.4. Installation (A5)

The product is installed by hand ; a looselay installation is recommended : no glue with double-sided tape on joint. During the installation, approximately 10% of the product is lost as off-cuts ; this waste is mainly sent to landfill.

Gerflor recommends using Gerflor Second Life program to recycle the off-cuts. This program is available in several countries. It is a simple and free collection system for installation waste and end of life products. The waste is first sent to a dedicated recycling center. After recycling, it is reintroduced in new Gerflor products in substitution of virgin materials.

Installation into the building (A5) - Scenario	VALUE	UNIT
Ancillary materials	-	kg
Adhesive	0.0288	Kg/m <sup>2</sup>
Net freshwater consumption specified by water source and fate (amount evaporated,amount disposed to sewer)	-	m3
Other resources	-	kg
Electricity consumption	-	kWh
Other energy carriers	-	MJ
Product loss per functional unit	0.3186	kg
Waste materials at the construction site before waste processing, generated byproduct installation	0.0932	kg
Output materials resulting from on-site waste processing (specified by route; e.g. forrecycling, energy recovery and/or disposal)	-	kg
Biogenic carbon contained in packaging	0.0397	kg CO <sub>2</sub>
Direct emissions to ambient air, soil and water	-	kg
VOC emissions	-	kg/m <sup>2</sup>

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## 3.5. Use - Reference Service Life and Building Estimated Service Life (B2)

Service Life	VALUE	UNIT
Product Reference Service Life (RSL)	25	years
Building estimated Service Life (ESL)	75	years

It should be noted that the service life may vary depending the amount and nature of floor traffic and the type and frequency of maintenance. The manufacturer has provided this service life based on his experience of flooring manufacture and supply.

This RSL is applicable as long as the product use complies with ISO 14041 in accordance with the product's classification.

Declared product properties (at the gate) and finishes, etc.	Declared product properties are described in Declaration of Performance (DOP), in accordance with EN 14041
Design application parameters (if instructed by the manufacturer), including references to the appropriate practices and application codes)	Products in accordance with EN 14041 and technical prescription of the manufacturer
An assumed quality of work, when installed in accordance with the manufacturer's instructions	Assumed to be installed according to the manufacturer's instructions
Outdoor environment, (if relevant for outdoor applications), e.g. weathering, pollutants, UV and wind exposure, building orientation, shading, temperature	Not relevant
Indoor environment, (if relevant for indoor applications), e.g. temperature, moisture, chemical exposure)	Use conditions in accordance with manufacturer prescriptions: see technical datasheet
Use conditions, e.g. frequency of use, mechanical exposure.	Use conditions in accordance with manufacturer prescriptions : see technical datasheet
Maintenance, e.g. required frequency, type and quality of replacement components	Maintenance scenario is defined in the table above

## 3.6. Use – Cleaning (B2)

Maintenance (B2) - Scenario	VALUE	UNIT
Maintenance process information (cite source in report)	Dry vacuum cleaning : 2/week Wet cleaning by hand : 1/week	-
Maintenance cycle	3900	Number/ RSL
Maintenance cycle	11700	Number/ ESL
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	2.6	L/year
Ancillary materials specified by type (e.g. cleaning agent)	0.026 0	kg/year
Other resources	-	kg
Energy input, specified by activity, type and amount	0.26	kWh/year
Other energy carriers specified by type	-	kWh
Power output of equipment	-	kW
Waste materials from maintenance (specify materials)	-	kg

# ENVIRONMENTAL PRODUCT DECLARATION

According to ISO 14025  
and EN 15804



**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

Direct emissions to ambient air, soil and water	-	kg
Further assumptions for scenario development (e.g. frequency and time period of use, number of occupants);	-	

## 3.7. Repair, replacement, refurbishment, reuse (B3-B5)

**Repair (B3):** no data

**Replacement (B4):** product's life expectancy being 25 years and building's life expectancy being 75 years, 2 product replacements will be necessary. The impact of these replacements can be found in indicator B4 "Replacement". B2 "Maintenance" is also proportional to the number of years considered.

Replacement (B4) – Scenario	VALUE	UNIT
Reference Service Life	25	Years
Number of replacements over building estimated service life (75 years)	2	(ESL-RSL)-1

## 3.8. Operational energy use (B6) and Operational water use (B7)

No data.

## 3.9. Deconstruction (C1)

Product deconstruction is carried out manually.

## 3.10. Transport (C2) and end-of-life (C3-C4)

Gerflor recommends using Gerflor Second Life program to recycle the product. This program is available in several countries.

It is a simple and free collection system for installation waste and end of life products. The waste is first sent to a dedicated recycling center. After recycling, it is reintroduced in new Gerflor products in substitution of virgin materials.

When recycling is not an option, landfill and incineration are the other options.

3 end-of-life scenarios are therefore proposed in this EPD to address the different cases: recycling, landfill, or incineration.

According to the PCR UL Part A, 50% of the product should be recycled for Europe. There is no specific data for this distance for European market, so the North America's one, in PCR UL Part B, is assumed by default.

COLLECTION PROCESS	VALUE	UNIT
Collection process (specified by type)	Collected with mixed construction waste - Product	kg
	Collected with mixed construction waste	kg

# ENVIRONMENTAL PRODUCT DECLARATION

According to ISO 14025  
and EN 15804



**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

RECYCLING SCENARIO	VALUE	UNIT
Distance to recycling center	161	km
Truck	16-32 metric ton Euro6	-
LANDFILL SCENARIO	VALUE	UNIT
Distance to landfill	161	km
Truck	16-32 metric ton Euro6	-
INCINERATION SCENARIO	VALUE	UNIT
Distance to incineration center	161	km
Truck	16-32 metric ton Euro6	-
BIOGENIC CARBON	VALUE	UNIT
Removals of biogenic carbon (excluding packaging)	-	kg CO2

## 3.11. Benefits and loads beyond system boundary (D)

Reuse, recovery and/or recycling potentials (D) - scenarios	VALUE	UNIT
Net energy benefit from energy recovery from waste treatment declared as exported energy in C3 (R>0.6)	-	MJ
Net energy benefit from thermal and electrical energy due to treatment of waste declared as exported energy in C4 (R<0.6)	5.83E+0	MJ
Net energy benefit from material flow declared in C3 for energy recovery	-	MJ
Process and conversion efficiencies		
Further assumptions for scenario development (e.g. further processing technologies, assumptions on correction factors);		

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025  
and EN 15804



## 4. Life Cycle Assessment Results for Europe

The following results are given for a service life of 1 year and 75 years.

75 years results include 2 replacements based on a product reference service life of 25 years.

LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. All results should be used with caution because the uncertainties in the results are high.

In the paragraphs below, the LCA results will be presented for three scenarios: recycling (1), landfill (2) and incineration (3). **Results only vary in C phase.**

### 4.1. Summary of key GWP results

For convenience, here is a summary of the key GWP results:

GLOBAL WARMING POTENTIAL (GWP) kg CO <sub>2</sub> eq./m <sup>2</sup>	Total GWP, with <b>recycling</b> scenario	Total GWP, with <b>landfill</b> scenario	Total GWP, with <b>incineration</b> scenario
Use 1 year	<b>8.82E+0</b>	<b>9.02E+0</b>	<b>1.39E+1</b>
Use 25 years	<b>1.26E+1</b>	<b>1.28E+1</b>	<b>1.77E+1</b>
Use 75 years	<b>3.80E+1</b>	<b>3.86E+1</b>	<b>5.32E+1</b>

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.2. Life Cycle Assessment – Environmental impacts

### 4.2.1. Environmental impacts for 1 year

#### 4.2.1.1. Potential environmental impact in case of RECYCLING at end of use

POTENTIAL ENVIRONMENTAL IMPACT - RECYCLING - 1 YEAR - per m <sup>2</sup>												
Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		C2 Transport	C3 Waste processing	C4 Disposal	
Climate change - GWP total	kg CO <sub>2</sub> eq	8.82E+0	6.19E+0	4.66E-1	4.00E-1	3.66E-1	1.09E+0	1.60E-1	8.37E-2	6.42E-2	0.00E+0	-2.64E+0
Climate change - GWP fossil	kg CO <sub>2</sub> eq	8.52E+0	6.01E+0	4.65E-1	4.95E-1	3.66E-1	9.22E-1	1.50E-1	8.36E-2	2.58E-2	0.00E+0	-2.71E+0
Climate change - GWP biogenic	kg CO <sub>2</sub> eq	6.77E-2	-2.43E-2	1.47E-4	-9.57E-2	1.15E-4	1.48E-1	8.68E-4	2.64E-5	3.84E-2	0.00E+0	6.86E-2
Climate change - GWP land use and change	kg CO <sub>2</sub> eq	2.34E-1	2.03E-1	1.90E-4	7.73E-4	1.50E-4	2.06E-2	9.04E-3	3.41E-5	6.00E-5	0.00E+0	-1.12E-3
Ozone depletion	kg CFC11 eq	5.20E-6	4.43E-6	1.09E-7	5.60E-8	8.54E-8	4.91E-7	1.17E-8	1.95E-8	1.31E-9	0.00E+0	-9.53E-7
Acidification	mol H+ eq	3.96E-2	3.04E-2	1.33E-3	9.19E-4	1.11E-3	4.34E-3	1.12E-3	2.39E-4	1.39E-4	0.00E+0	-1.52E-2
Eutrophication, freshwater (P)	kg P eq	3.58E-4	2.82E-4	3.35E-6	9.32E-6	2.62E-6	3.93E-5	1.77E-5	6.01E-7	2.70E-6	0.00E+0	-3.70E-5
Eutrophication, freshwater (PO <sub>4</sub> )	kg PO <sub>4</sub> eq	7.57E-3	6.75E-3	1.03E-5	2.86E-5	8.05E-6	7.09E-4	5.44E-5	1.85E-6	8.30E-6	0.00E+0	-1.14E-4
Eutrophication, marine	kg N eq	8.09E-3	5.82E-3	2.65E-4	3.32E-4	2.24E-4	9.54E-4	4.38E-4	4.76E-5	1.89E-5	0.00E+0	-2.03E-3
Eutrophication, terrestrial	mol N eq	7.84E-2	5.90E-2	2.95E-3	2.23E-3	2.50E-3	8.56E-3	2.40E-3	5.30E-4	2.16E-4	0.00E+0	-2.28E-2
Photochemical ozone formation	kg NMVOC eq	2.82E-2	2.16E-2	1.13E-3	6.78E-4	9.35E-4	3.11E-3	4.96E-4	2.04E-4	6.08E-5	0.00E+0	-1.35E-2
Resource use, minerals and metals	kg Sb eq	6.76E-3	6.14E-3	1.70E-6	1.37E-6	1.34E-6	6.18E-4	1.92E-6	3.06E-7	7.29E-8	0.00E+0	-5.62E-5
Resource use, fossils	MJ	1.87E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	3.24E+0	1.28E+0	5.44E-1	0.00E+0	-9.56E+1
Water use	m <sup>3</sup> depriv.	8.88E+0	7.68E+0	2.13E-2	5.83E-2	1.67E-2	9.14E-1	1.78E-1	3.82E-3	6.22E-3	0.00E+0	-2.44E+0
Particulate matter	disease inc.	3.91E-7	2.54E-7	3.78E-8	7.14E-9	2.96E-8	4.88E-8	7.04E-9	6.78E-9	4.54E-10	0.00E+0	-1.19E-7
Ionising radiation	kBq U-235 eq	4.35E-1	2.95E-1	3.09E-2	1.17E-2	2.43E-2	4.12E-2	2.11E-2	5.55E-3	4.81E-3	0.00E+0	1.65E-2
Ecotoxicity, freshwater	CTUe	7.61E+1	4.84E+1	2.08E+0	3.59E+0	1.63E+0	1.80E+1	2.00E+0	3.74E-1	3.03E-2	0.00E+0	-2.94E+1
Human toxicity, cancer	CTUh	3.47E-9	1.37E-9	8.36E-11	7.06E-11	6.57E-11	1.71E-9	1.59E-10	1.50E-11	5.28E-12	0.00E+0	1.46E-10
Human toxicity, non-cancer	CTUh	1.50E-8	1.19E-8	2.12E-10	3.40E-10	1.66E-10	2.25E-9	8.56E-11	3.80E-11	4.75E-12	0.00E+0	-2.48E-9
Land use	Pt	5.13E+1	3.15E+1	4.96E+0	1.48E+0	3.88E+0	4.81E+0	3.67E+0	8.91E-1	8.39E-2	0.00E+0	4.12E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.2.1.2. Potential environmental impact in case of LANDFILL at end of use

### POTENTIAL ENVIRONMENTAL IMPACT - LANDFILL - 1 YEAR - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		B2 Maintenance (1 year)	C2 Transport	C3 Waste processing	
Climate change - GWP total	kg CO <sub>2</sub> eq	9.02E+0	6.19E+0	4.66E-1	4.00E-1	3.66E-1	1.09E+0	1.60E-1	8.37E-2	0.00E+0	2.63E-1	0.00E+0
Climate change - GWP fossil	kg CO <sub>2</sub> eq	8.72E+0	6.01E+0	4.65E-1	4.95E-1	3.66E-1	9.22E-1	1.50E-1	8.36E-2	0.00E+0	2.25E-1	0.00E+0
Climate change - GWP biogenic	kg CO <sub>2</sub> eq	6.76E-2	-2.43E-2	1.47E-4	-9.57E-2	1.15E-4	1.48E-1	8.68E-4	2.64E-5	0.00E+0	3.83E-2	0.00E+0
Climate change - GWP land use and change	kg CO <sub>2</sub> eq	2.34E-1	2.03E-1	1.90E-4	7.73E-4	1.50E-4	2.06E-2	9.04E-3	3.41E-5	0.00E+0	7.01E-6	0.00E+0
Ozone depletion	kg CFC11 eq	5.21E-6	4.43E-6	1.09E-7	5.60E-8	8.54E-8	4.91E-7	1.17E-8	1.95E-8	0.00E+0	9.96E-9	0.00E+0
Acidification	mol H+ eq	3.97E-2	3.04E-2	1.33E-3	9.19E-4	1.11E-3	4.34E-3	1.12E-3	2.39E-4	0.00E+0	2.38E-4	0.00E+0
Eutrophication, freshwater (P)	kg P eq	3.56E-4	2.82E-4	3.35E-6	9.32E-6	2.62E-6	3.93E-5	1.77E-5	6.01E-7	0.00E+0	2.31E-7	0.00E+0
Eutrophication, freshwater (PO <sub>4</sub> )	kg PO <sub>4</sub> eq	7.56E-3	6.75E-3	1.03E-5	2.86E-5	8.05E-6	7.09E-4	5.44E-5	1.85E-6	0.00E+0	7.10E-7	0.00E+0
Eutrophication, marine	kg N eq	8.23E-3	5.82E-3	2.65E-4	3.32E-4	2.24E-4	9.54E-4	4.38E-4	4.76E-5	0.00E+0	1.56E-4	0.00E+0
Eutrophication, terrestrial	mol N eq	7.91E-2	5.90E-2	2.95E-3	2.23E-3	2.50E-3	8.56E-3	2.40E-3	5.30E-4	0.00E+0	9.63E-4	0.00E+0
Photochemical ozone formation	kg NMVOC eq	2.85E-2	2.16E-2	1.13E-3	6.78E-4	9.35E-4	3.11E-3	4.96E-4	2.04E-4	0.00E+0	3.30E-4	0.00E+0
Resource use, minerals and metals	kg Sb eq	6.76E-3	6.14E-3	1.70E-6	1.37E-6	1.34E-6	6.18E-4	1.92E-6	3.06E-7	0.00E+0	9.40E-8	0.00E+0
Resource use, fossils	MJ	1.87E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	3.24E+0	1.28E+0	0.00E+0	7.19E-1	0.00E+0
Water use	m <sup>3</sup> depriv.	8.88E+0	7.68E+0	2.13E-2	5.83E-2	1.67E-2	9.14E-1	1.78E-1	3.82E-3	0.00E+0	3.39E-3	0.00E+0
Particulate matter	disease inc.	3.96E-7	2.54E-7	3.78E-8	7.14E-9	2.96E-8	4.88E-8	7.04E-9	6.78E-9	0.00E+0	5.19E-9	0.00E+0
Ionising radiation	kBq U-235 eq	4.33E-1	2.95E-1	3.09E-2	1.17E-2	2.43E-2	4.12E-2	2.11E-2	5.55E-3	0.00E+0	3.30E-3	0.00E+0
Ecotoxicity, freshwater	CTUe	8.78E+1	4.84E+1	2.08E+0	3.59E+0	1.63E+0	1.80E+1	2.00E+0	3.74E-1	0.00E+0	1.18E+1	0.00E+0
Human toxicity, cancer	CTUh	3.48E-9	1.37E-9	8.36E-11	7.06E-11	6.57E-11	1.71E-9	1.59E-10	1.50E-11	0.00E+0	7.00E-12	0.00E+0
Human toxicity, non-cancer	CTUh	1.53E-8	1.19E-8	2.12E-10	3.40E-10	1.66E-10	2.25E-9	8.56E-11	3.80E-11	0.00E+0	2.69E-10	0.00E+0
Land use	Pt	5.31E+1	3.15E+1	4.96E+0	1.48E+0	3.88E+0	4.81E+0	3.67E+0	8.91E-1	0.00E+0	1.87E+0	0.00E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.2.1.3. Potential environmental impact in case of INCINERATION at end of use

### POTENTIAL ENVIRONMENTAL IMPACT – INCINERATION - 1 YEAR - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		B2 Maintenance (1 year)	C2 Transport	C3 Waste processing	
Climate change - GWP total	kg CO <sub>2</sub> eq	1.39E+1	6.19E+0	4.66E-1	4.00E-1	3.66E-1	1.09E+0	1.60E-1	8.37E-2	0.00E+0	5.14E+0	-4.06E+0
Climate change - GWP fossil	kg CO <sub>2</sub> eq	1.36E+1	6.01E+0	4.65E-1	4.95E-1	3.66E-1	9.22E-1	1.50E-1	8.36E-2	0.00E+0	5.10E+0	-4.03E+0
Climate change - GWP biogenic	kg CO <sub>2</sub> eq	6.95E-2	-2.43E-2	1.47E-4	-9.57E-2	1.15E-4	1.48E-1	8.68E-4	2.64E-5	0.00E+0	4.01E-2	-1.46E-2
Climate change - GWP land use and change	kg CO <sub>2</sub> eq	2.36E-1	2.03E-1	1.90E-4	7.73E-4	1.50E-4	2.06E-2	9.04E-3	3.41E-5	0.00E+0	1.28E-3	-6.77E-3
Ozone depletion	kg CFC11 eq	5.61E-6	4.43E-6	1.09E-7	5.60E-8	8.54E-8	4.91E-7	1.17E-8	1.95E-8	0.00E+0	4.04E-7	-3.69E-7
Acidification	mol H+ eq	4.45E-2	3.04E-2	1.33E-3	9.19E-4	1.11E-3	4.34E-3	1.12E-3	2.39E-4	0.00E+0	5.06E-3	-2.14E-2
Eutrophication, freshwater (P)	kg P eq	3.91E-4	2.82E-4	3.35E-6	9.32E-6	2.62E-6	3.93E-5	1.77E-5	6.01E-7	0.00E+0	3.52E-5	-3.06E-4
Eutrophication, freshwater (PO <sub>4</sub> )	kg PO <sub>4</sub> eq	7.67E-3	6.75E-3	1.03E-5	2.86E-5	8.05E-6	7.09E-4	5.44E-5	1.85E-6	0.00E+0	1.08E-4	-9.39E-4
Eutrophication, marine	kg N eq	9.36E-3	5.82E-3	2.65E-4	3.32E-4	2.24E-4	9.54E-4	4.38E-4	4.76E-5	0.00E+0	1.28E-3	-2.57E-3
Eutrophication, terrestrial	mol N eq	9.23E-2	5.90E-2	2.95E-3	2.23E-3	2.50E-3	8.56E-3	2.40E-3	5.30E-4	0.00E+0	1.42E-2	-2.92E-2
Photochemical ozone formation	kg NMVOC eq	3.19E-2	2.16E-2	1.13E-3	6.78E-4	9.35E-4	3.11E-3	4.96E-4	2.04E-4	0.00E+0	3.77E-3	-8.41E-3
Resource use, minerals and metals	kg Sb eq	6.78E-3	6.14E-3	1.70E-6	1.37E-6	1.34E-6	6.18E-4	1.92E-6	3.06E-7	0.00E+0	1.61E-5	-7.08E-6
Resource use, fossils	MJ	1.95E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	3.24E+0	1.28E+0	0.00E+0	9.19E+0	-7.89E+1
Water use	m <sup>3</sup> depriv.	9.54E+0	7.68E+0	2.13E-2	5.83E-2	1.67E-2	9.14E-1	1.78E-1	3.82E-3	0.00E+0	6.64E-1	-6.67E-1
Particulate matter	disease inc.	4.31E-7	2.54E-7	3.78E-8	7.14E-9	2.96E-8	4.88E-8	7.04E-9	6.78E-9	0.00E+0	4.08E-8	-8.67E-8
Ionising radiation	kBq U-235 eq	4.69E-1	2.95E-1	3.09E-2	1.17E-2	2.43E-2	4.12E-2	2.11E-2	5.55E-3	0.00E+0	3.94E-2	-5.90E-1
Ecotoxicity, freshwater	CTUe	2.30E+2	4.84E+1	2.08E+0	3.59E+0	1.63E+0	1.80E+1	2.00E+0	3.74E-1	0.00E+0	1.54E+2	-5.35E+0
Human toxicity, cancer	CTUh	4.48E-9	1.37E-9	8.36E-11	7.06E-11	6.57E-11	1.71E-9	1.59E-10	1.50E-11	0.00E+0	1.01E-9	-3.87E-10
Human toxicity, non-cancer	CTUh	1.54E-8	1.19E-8	2.12E-10	3.40E-10	1.66E-10	2.25E-9	8.56E-11	3.80E-11	0.00E+0	4.08E-10	-5.97E-10
Land use	Pt	5.42E+1	3.15E+1	4.96E+0	1.48E+0	3.88E+0	4.81E+0	3.67E+0	8.91E-1	0.00E+0	2.96E+0	-1.01E+1



# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.2.2. Environmental impacts for 75 years

### 4.2.2.1. Potential environmental impact in case of RECYCLING at end of use

#### POTENTIAL ENVIRONMENTAL IMPACT - RECYCLING - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production		Construction		Use		End-of-life			D Benefits & load beyond system boundaries	
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Climate change - GWP total	kg CO <sub>2</sub> eq	3.80E+1	6.19E+0	4.66E-1	4.00E-1	3.66E-1	1.09E+0	1.20E+1	1.73E+1	8.37E-2	6.42E-2	0.00E+0	-2.64E+0
Climate change - GWP fossil	kg CO <sub>2</sub> eq	3.64E+1	6.01E+0	4.65E-1	4.95E-1	3.66E-1	9.22E-1	1.12E+1	1.67E+1	8.36E-2	2.58E-2	0.00E+0	-2.71E+0
Climate change - GWP biogenic	kg CO <sub>2</sub> eq	2.66E-1	-2.43E-2	1.47E-4	-9.57E-2	1.15E-4	1.48E-1	6.51E-2	1.34E-1	2.64E-5	3.84E-2	0.00E+0	6.86E-2
Climate change -GWP land use and change	kg CO <sub>2</sub> eq	1.35E+0	2.03E-1	1.90E-4	7.73E-4	1.50E-4	2.06E-2	6.78E-1	4.51E-1	3.41E-5	6.00E-5	0.00E+0	-1.12E-3
Ozone depletion	kg CFC11 eq	1.65E-5	4.43E-6	1.09E-7	5.60E-8	8.54E-8	4.91E-7	8.78E-7	1.04E-5	1.95E-8	1.31E-9	0.00E+0	-9.53E-7
Acidification	mol H+ eq	2.00E-1	3.04E-2	1.33E-3	9.19E-4	1.11E-3	4.34E-3	8.43E-2	7.69E-2	2.39E-4	1.39E-4	0.00E+0	-1.52E-2
Eutrophication, freshwater (P)	kg P eq	2.35E-3	2.82E-4	3.35E-6	9.32E-6	2.62E-6	3.93E-5	1.33E-3	6.81E-4	6.01E-7	2.70E-6	0.00E+0	-3.70E-5
Eutrophication, freshwater (PO <sub>4</sub> )	kg PO <sub>4</sub> eq	2.66E-2	6.75E-3	1.03E-5	2.86E-5	8.05E-6	7.09E-4	4.08E-3	1.50E-2	1.85E-6	8.30E-6	0.00E+0	-1.14E-4
Eutrophication, marine	kg N eq	5.58E-2	5.82E-3	2.65E-4	3.32E-4	2.24E-4	9.54E-4	3.29E-2	1.53E-2	4.76E-5	1.89E-5	0.00E+0	-2.03E-3
Eutrophication, terrestrial	mol N eq	4.08E-1	5.90E-2	2.95E-3	2.23E-3	2.50E-3	8.56E-3	1.80E-1	1.52E-1	5.30E-4	2.16E-4	0.00E+0	-2.28E-2
Photochemical ozone formation	kg NMVOC eq	1.20E-1	2.16E-2	1.13E-3	6.78E-4	9.35E-4	3.11E-3	3.72E-2	5.55E-2	2.04E-4	6.08E-5	0.00E+0	-1.35E-2
Resource use, minerals and metals	kg Sb eq	2.04E-2	6.14E-3	1.70E-6	1.37E-6	1.34E-6	6.18E-4	1.44E-4	1.35E-2	3.06E-7	7.29E-8	0.00E+0	-5.62E-5
Resource use, fossils	MJ	7.94E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	2.43E+2	3.67E+2	1.28E+0	5.44E-1	0.00E+0	-9.56E+1
Water use	m <sup>3</sup> depriv.	3.94E+1	7.68E+0	2.13E-2	5.83E-2	1.67E-2	9.14E-1	1.33E+1	1.74E+1	3.82E-3	6.22E-3	0.00E+0	-2.44E+0
Particulate matter	disease inc.	1.68E-6	2.54E-7	3.78E-8	7.14E-9	2.96E-8	4.88E-8	5.28E-7	7.68E-7	6.78E-9	4.54E-10	0.00E+0	-1.19E-7
Ionising radiation	kBq U-235 eq	2.82E+0	2.95E-1	3.09E-2	1.17E-2	2.43E-2	4.12E-2	1.58E+0	8.27E-1	5.55E-3	4.81E-3	0.00E+0	1.65E-2
Ecotoxicity, freshwater	CTUe	3.72E+2	4.84E+1	2.08E+0	3.59E+0	1.63E+0	1.80E+1	1.50E+2	1.48E+2	3.74E-1	3.03E-2	0.00E+0	-2.94E+1
Human toxicity, cancer	CTUh	2.19E-8	1.37E-9	8.36E-11	7.06E-11	6.57E-11	1.71E-9	1.20E-8	6.63E-9	1.50E-11	5.28E-12	0.00E+0	1.46E-10
Human toxicity, non-cancer	CTUh	5.13E-8	1.19E-8	2.12E-10	3.40E-10	1.66E-10	2.25E-9	6.42E-9	2.99E-8	3.80E-11	4.75E-12	0.00E+0	-2.48E-9
Land use	Pt	4.18E+2	3.15E+1	4.96E+0	1.48E+0	3.88E+0	4.81E+0	2.76E+2	9.52E+1	8.91E-1	8.39E-2	0.00E+0	4.12E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.2.2.2. Potential environmental impact in case of LANDFILL at end of use

### POTENTIAL ENVIRONMENTAL IMPACT - LANDFILL - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use		End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Climate change - GWP total	kg CO <sub>2</sub> eq	3.86E+1	6.19E+0	4.66E-1	4.00E-1	3.66E-1	1.09E+0	1.20E+1	1.77E+1	8.37E-2	0.00E+0	2.63E-1	0.00E+0
Climate change - GWP fossil	kg CO <sub>2</sub> eq	3.70E+1	6.01E+0	4.65E-1	4.95E-1	3.66E-1	9.22E-1	1.12E+1	1.71E+1	8.36E-2	0.00E+0	2.25E-1	0.00E+0
Climate change - GWP biogenic	kg CO <sub>2</sub> eq	2.65E-1	-2.43E-2	1.47E-4	-9.57E-2	1.15E-4	1.48E-1	6.51E-2	1.34E-1	2.64E-5	0.00E+0	3.83E-2	0.00E+0
Climate change -GWP land use and change	kg CO <sub>2</sub> eq	1.35E+0	2.03E-1	1.90E-4	7.73E-4	1.50E-4	2.06E-2	6.78E-1	4.50E-1	3.41E-5	0.00E+0	7.01E-6	0.00E+0
Ozone depletion	kg CFC11 eq	1.65E-5	4.43E-6	1.09E-7	5.60E-8	8.54E-8	4.91E-7	8.78E-7	1.04E-5	1.95E-8	0.00E+0	9.96E-9	0.00E+0
Acidification	mol H+ eq	2.00E-1	3.04E-2	1.33E-3	9.19E-4	1.11E-3	4.34E-3	8.43E-2	7.71E-2	2.39E-4	0.00E+0	2.38E-4	0.00E+0
Eutrophication, freshwater (P)	kg P eq	2.34E-3	2.82E-4	3.35E-6	9.32E-6	2.62E-6	3.93E-5	1.33E-3	6.76E-4	6.01E-7	0.00E+0	2.31E-7	0.00E+0
Eutrophication, freshwater (PO <sub>4</sub> )	kg PO <sub>4</sub> eq	2.66E-2	6.75E-3	1.03E-5	2.86E-5	8.05E-6	7.09E-4	4.08E-3	1.50E-2	1.85E-6	0.00E+0	7.10E-7	0.00E+0
Eutrophication, marine	kg N eq	5.62E-2	5.82E-3	2.65E-4	3.32E-4	2.24E-4	9.54E-4	3.29E-2	1.56E-2	4.76E-5	0.00E+0	1.56E-4	0.00E+0
Eutrophication, terrestrial	mol N eq	4.10E-1	5.90E-2	2.95E-3	2.23E-3	2.50E-3	8.56E-3	1.80E-1	1.53E-1	5.30E-4	0.00E+0	9.63E-4	0.00E+0
Photochemical ozone formation	kg NMVOC eq	1.21E-1	2.16E-2	1.13E-3	6.78E-4	9.35E-4	3.11E-3	3.72E-2	5.60E-2	2.04E-4	0.00E+0	3.30E-4	0.00E+0
Resource use, minerals and metals	kg Sb eq	2.04E-2	6.14E-3	1.70E-6	1.37E-6	1.34E-6	6.18E-4	1.44E-4	1.35E-2	3.06E-7	0.00E+0	9.40E-8	0.00E+0
Resource use, fossils	MJ	7.94E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	2.43E+2	3.67E+2	1.28E+0	0.00E+0	7.19E-1	0.00E+0
Water use	m <sup>3</sup> depriv.	3.94E+1	7.68E+0	2.13E-2	5.83E-2	1.67E-2	9.14E-1	1.33E+1	1.74E+1	3.82E-3	0.00E+0	3.39E-3	0.00E+0
Particulate matter	disease inc.	1.69E-6	2.54E-7	3.78E-8	7.14E-9	2.96E-8	4.88E-8	5.28E-7	7.78E-7	6.78E-9	0.00E+0	5.19E-9	0.00E+0
Ionising radiation	kBq U-235 eq	2.82E+0	2.95E-1	3.09E-2	1.17E-2	2.43E-2	4.12E-2	1.58E+0	8.24E-1	5.55E-3	0.00E+0	3.30E-3	0.00E+0
Ecotoxicity, freshwater	CTUe	4.08E+2	4.84E+1	2.08E+0	3.59E+0	1.63E+0	1.80E+1	1.50E+2	1.72E+2	3.74E-1	0.00E+0	1.18E+1	0.00E+0
Human toxicity, cancer	CTUh	2.19E-8	1.37E-9	8.36E-11	7.06E-11	6.57E-11	1.71E-9	1.20E-8	6.63E-9	1.50E-11	0.00E+0	7.00E-12	0.00E+0
Human toxicity, non-cancer	CTUh	5.21E-8	1.19E-8	2.12E-10	3.40E-10	1.66E-10	2.25E-9	6.42E-9	3.04E-8	3.80E-11	0.00E+0	2.69E-10	0.00E+0
Land use	Pt	4.24E+2	3.15E+1	4.96E+0	1.48E+0	3.88E+0	4.81E+0	2.76E+2	9.88E+1	8.91E-1	0.00E+0	1.87E+0	0.00E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.2.2.3. Potential environmental impact in case of INCINERATION at end of use

### POTENTIAL ENVIRONMENTAL IMPACT – INCINERATION - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use		End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Climate change - GWP total	kg CO <sub>2</sub> eq	5.32E+1	6.19E+0	4.66E-1	4.00E-1	3.66E-1	1.09E+0	1.20E+1	2.75E+1	8.37E-2	0.00E+0	5.14E+0	-4.06E+0
Climate change - GWP fossil	kg CO <sub>2</sub> eq	5.16E+1	6.01E+0	4.65E-1	4.95E-1	3.66E-1	9.22E-1	1.12E+1	2.69E+1	8.36E-2	0.00E+0	5.10E+0	-4.03E+0
Climate change - GWP biogenic	kg CO <sub>2</sub> eq	2.71E-1	-2.43E-2	1.47E-4	-9.57E-2	1.15E-4	1.48E-1	6.51E-2	1.37E-1	2.64E-5	0.00E+0	4.01E-2	-1.46E-2
Climate change -GWP land use and change	kg CO <sub>2</sub> eq	1.36E+0	2.03E-1	1.90E-4	7.73E-4	1.50E-4	2.06E-2	6.78E-1	4.53E-1	3.41E-5	0.00E+0	1.28E-3	-6.77E-3
Ozone depletion	kg CFC11 eq	1.77E-5	4.43E-6	1.09E-7	5.60E-8	8.54E-8	4.91E-7	8.78E-7	1.12E-5	1.95E-8	0.00E+0	4.04E-7	-3.69E-7
Acidification	mol H+ eq	2.14E-1	3.04E-2	1.33E-3	9.19E-4	1.11E-3	4.34E-3	8.43E-2	8.68E-2	2.39E-4	0.00E+0	5.06E-3	-2.14E-2
Eutrophication, freshwater (P)	kg P eq	2.45E-3	2.82E-4	3.35E-6	9.32E-6	2.62E-6	3.93E-5	1.33E-3	7.46E-4	6.01E-7	0.00E+0	3.52E-5	-3.06E-4
Eutrophication, freshwater (PO <sub>4</sub> )	kg PO <sub>4</sub> eq	2.69E-2	6.75E-3	1.03E-5	2.86E-5	8.05E-6	7.09E-4	4.08E-3	1.52E-2	1.85E-6	0.00E+0	1.08E-4	-9.39E-4
Eutrophication, marine	kg N eq	5.96E-2	5.82E-3	2.65E-4	3.32E-4	2.24E-4	9.54E-4	3.29E-2	1.78E-2	4.76E-5	0.00E+0	1.28E-3	-2.57E-3
Eutrophication, terrestrial	mol N eq	4.50E-1	5.90E-2	2.95E-3	2.23E-3	2.50E-3	8.56E-3	1.80E-1	1.80E-1	5.30E-4	0.00E+0	1.42E-2	-2.92E-2
Photochemical ozone formation	kg NMVOC eq	1.32E-1	2.16E-2	1.13E-3	6.78E-4	9.35E-4	3.11E-3	3.72E-2	6.29E-2	2.04E-4	0.00E+0	3.77E-3	-8.41E-3
Resource use, minerals and metals	kg Sb eq	2.05E-2	6.14E-3	1.70E-6	1.37E-6	1.34E-6	6.18E-4	1.44E-4	1.36E-2	3.06E-7	0.00E+0	1.61E-5	-7.08E-6
Resource use, fossils	MJ	8.20E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	2.43E+2	3.84E+2	1.28E+0	0.00E+0	9.19E+0	-7.89E+1
Water use	m <sup>3</sup> depriv.	4.14E+1	7.68E+0	2.13E-2	5.83E-2	1.67E-2	9.14E-1	1.33E+1	1.87E+1	3.82E-3	0.00E+0	6.64E-1	-6.67E-1
Particulate matter	disease inc.	1.80E-6	2.54E-7	3.78E-8	7.14E-9	2.96E-8	4.88E-8	5.28E-7	8.49E-7	6.78E-9	0.00E+0	4.08E-8	-8.67E-8
Ionising radiation	kBq U-235 eq	2.92E+0	2.95E-1	3.09E-2	1.17E-2	2.43E-2	4.12E-2	1.58E+0	8.96E-1	5.55E-3	0.00E+0	3.94E-2	-5.90E-1
Ecotoxicity, freshwater	CTUe	8.36E+2	4.84E+1	2.08E+0	3.59E+0	1.63E+0	1.80E+1	1.50E+2	4.57E+2	3.74E-1	0.00E+0	1.54E+2	-5.35E+0
Human toxicity, cancer	CTUh	2.49E-8	1.37E-9	8.36E-11	7.06E-11	6.57E-11	1.71E-9	1.20E-8	8.63E-9	1.50E-11	0.00E+0	1.01E-9	-3.87E-10
Human toxicity, non-cancer	CTUh	5.25E-8	1.19E-8	2.12E-10	3.40E-10	1.66E-10	2.25E-9	6.42E-9	3.07E-8	3.80E-11	0.00E+0	4.08E-10	-5.97E-10
Land use	Pt	4.27E+2	3.15E+1	4.96E+0	1.48E+0	3.88E+0	4.81E+0	2.76E+2	1.01E+2	8.91E-1	0.00E+0	2.96E+0	-1.01E+1

### 4.3. Life Cycle Assessment – Resources, wastes categories and outgoing flows

#### 4.3.1. Resources, wastes categories and outgoing flows for 1 year

##### 4.3.1.1. Resources, waste categories and outgoing flows in case of RECYCLING at end of use

RESOURCES, WASTES CATEGORIES AND OUTGOING FLOWS - RECYCLING - 1 YEAR - per m <sup>2</sup>												
Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		C2 Transport	C3 Waste processing	C4 Disposal	
Renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.32E+1	9.16E+0	1.02E-1	1.39E+0	7.97E-2	1.34E+0	1.05E+0	1.83E-2	9.54E-2	0.00E+0	-4.70E-1
Renewable primary energy used as RM	kg CO <sub>2</sub> eq	2.72E+0	2.40E+0	0.00E+0	9.51E-1	0.00E+0	-9.67E-1	3.40E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total renewable primary energy	kg CO <sub>2</sub> eq	1.60E+1	1.16E+1	1.02E-1	2.34E+0	7.97E-2	3.72E-1	1.39E+0	1.83E-2	9.54E-2	0.00E+0	-4.70E-1
Non renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.10E+2	7.36E+1	7.11E+0	6.71E+0	5.59E+0	1.18E+1	2.89E+0	1.28E+0	5.44E-1	0.00E+0	-6.42E+1
Non renewable primary energy used as RM	kg CFC11 eq	7.75E+1	6.95E+1	0.00E+0	0.00E+0	0.00E+0	7.67E+0	3.85E-1	0.00E+0	0.00E+0	0.00E+0	-3.15E+1
Total non renewable primary energy	mol H+ eq	1.87E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	3.28E+0	1.28E+0	5.44E-1	0.00E+0	-9.56E+1
Use of secondary material	kg P eq	4.00E-1	2.70E-1	0.00E+0	9.32E-2	0.00E+0	3.63E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of renewable secondary fuels	kg PO <sub>4</sub> eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of non renewable secondary fuels	kg N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Recovered energy	mol N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Net use of fresh water	kg NMVOC eq	1.64E-1	1.33E-1	8.05E-4	2.82E-3	6.31E-4	1.71E-2	9.02E-3	1.45E-4	4.66E-4	0.00E+0	-4.70E-2
Hazardous waste disposed	kg Sb eq	3.24E-1	2.48E-1	5.21E-3	2.29E-2	4.10E-3	3.45E-2	7.56E-3	9.37E-4	8.59E-4	0.00E+0	-6.07E-2
Non hazardous waste disposed	MJ	4.46E+0	2.63E+0	4.14E-1	1.53E-1	3.24E-1	7.79E-1	7.38E-2	7.43E-2	8.98E-3	0.00E+0	-8.20E-1
Radioactive waste disposed (High)	m <sup>3</sup> depriv.	5.50E-5	4.26E-5	5.29E-7	1.89E-6	4.14E-7	5.08E-6	3.52E-6	9.50E-8	8.26E-7	0.00E+0	-2.40E-6
Radioactive waste disposed (Inter-Low)	disease inc.	3.91E-4	2.31E-4	4.75E-5	1.15E-5	3.74E-5	3.78E-5	1.42E-5	8.54E-6	3.12E-6	0.00E+0	1.20E-5
Components for re-use	kBq U-235 eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for recycling	CTUe	3.32E+0	2.07E-3	0.00E+0	2.47E-2	0.00E+0	7.39E-2	0.00E+0	0.00E+0	3.21E+0	0.00E+0	0.00E+0
Materials for energy recovery	CTUh	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Exported energy	CTUh	9.40E-1	0.00E+0	0.00E+0	8.27E-1	0.00E+0	1.13E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0

## 4.3.1.2. Resources, waste categories and outgoing flows in case of LANDFILL at end of use

RESOURCES, WASTES CATEGORIES AND OUTGOING FLOWS - LANDFILL - 1 YEAR - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		B2 Mainten. (1 year)	C2 Transport	C3 Waste processing	
Renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.32E+1	9.16E+0	1.02E-1	1.39E+0	7.97E-2	1.34E+0	1.05E+0	1.83E-2	0.00E+0	3.13E-2	0.00E+0
Renewable primary energy used as RM	kg CO <sub>2</sub> eq	2.72E+0	2.40E+0	0.00E+0	9.51E-1	0.00E+0	-9.67E-1	3.40E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total renewable primary energy	kg CO <sub>2</sub> eq	1.59E+1	1.16E+1	1.02E-1	2.34E+0	7.97E-2	3.72E-1	1.39E+0	1.83E-2	0.00E+0	3.13E-2	0.00E+0
Non renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.10E+2	7.36E+1	7.11E+0	6.71E+0	5.59E+0	1.18E+1	2.89E+0	1.28E+0	0.00E+0	7.19E-1	0.00E+0
Non renewable primary energy used as RM	kg CFC11 eq	7.75E+1	6.95E+1	0.00E+0	0.00E+0	0.00E+0	7.67E+0	3.85E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total non renewable primary energy	mol H <sub>2</sub> eq	1.87E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	3.28E+0	1.28E+0	0.00E+0	7.19E-1	0.00E+0
Use of secondary material	kg P eq	4.00E-1	2.70E-1	0.00E+0	9.32E-2	0.00E+0	3.63E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of renewable secondary fuels	kg PO <sub>4</sub> eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of non renewable secondary fuels	kg N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Recovered energy	mol N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Net use of fresh water	kg NMVOC eq	1.64E-1	1.33E-1	8.05E-4	2.82E-3	6.31E-4	1.71E-2	9.02E-3	1.45E-4	0.00E+0	9.10E-4	0.00E+0
Hazardous waste disposed	kg Sb eq	3.24E-1	2.48E-1	5.21E-3	2.29E-2	4.10E-3	3.45E-2	7.56E-3	9.37E-4	0.00E+0	8.29E-4	0.00E+0
Non hazardous waste disposed	MJ	7.67E+0	2.63E+0	4.14E-1	1.53E-1	3.24E-1	7.79E-1	7.38E-2	7.43E-2	0.00E+0	3.22E+0	0.00E+0
Radioactive waste disposed (High)	m <sup>3</sup> depriv.	5.42E-5	4.26E-5	5.29E-7	1.89E-6	4.14E-7	5.08E-6	3.52E-6	9.50E-8	0.00E+0	8.27E-8	0.00E+0
Radioactive waste disposed (Inter-Low)	disease inc.	3.92E-4	2.31E-4	4.75E-5	1.15E-5	3.74E-5	3.78E-5	1.42E-5	8.54E-6	0.00E+0	4.56E-6	0.00E+0
Components for re-use	kBq U-235 eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for recycling	CTUe	1.01E-1	2.07E-3	0.00E+0	2.47E-2	0.00E+0	7.39E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for energy recovery	CTUh	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Exported energy	CTUh	9.40E-1	0.00E+0	0.00E+0	8.27E-1	0.00E+0	1.13E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0

## 4.3.1.3. Resources, waste categories and outgoing flows in case of INCINERATION at end of use

RESOURCES, WASTES CATEGORIES AND OUTGOING FLOWS – INCINERATION - 1 YEAR - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		C2 Transport	C3 Waste processing	C4 Disposal	
Renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.42E+1	9.16E+0	1.02E-1	1.39E+0	7.97E-2	1.34E+0	1.05E+0	1.83E-2	0.00E+0	1.03E+0	-1.09E+1
Renewable primary energy used as RM	kg CO <sub>2</sub> eq	2.72E+0	2.40E+0	0.00E+0	9.51E-1	0.00E+0	-9.67E-1	3.40E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total renewable primary energy	kg CO <sub>2</sub> eq	1.69E+1	1.16E+1	1.02E-1	2.34E+0	7.97E-2	3.72E-1	1.39E+0	1.83E-2	0.00E+0	1.03E+0	-1.09E+1
Non renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.83E+2	7.36E+1	7.11E+0	6.71E+0	5.59E+0	1.18E+1	2.89E+0	1.28E+0	0.00E+0	7.40E+1	-7.89E+1
Non renewable primary energy used as RM	kg CFC11 eq	1.27E+1	6.95E+1	0.00E+0	0.00E+0	0.00E+0	7.67E+0	3.85E-1	0.00E+0	0.00E+0	-6.48E+1	0.00E+0
Total non renewable primary energy	mol H <sub>+</sub> eq	1.96E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	3.28E+0	1.28E+0	0.00E+0	9.19E+0	-7.89E+1
Use of secondary material	kg P eq	4.00E-1	2.70E-1	0.00E+0	9.32E-2	0.00E+0	3.63E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of renewable secondary fuels	kg PO <sub>4</sub> eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of non renewable secondary fuels	kg N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Recovered energy	mol Neq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Net use of fresh water	kg NMVOC eq	1.82E-1	1.33E-1	8.05E-4	2.82E-3	6.31E-4	1.71E-2	9.02E-3	1.45E-4	0.00E+0	1.92E-2	-5.20E-2
Hazardous waste disposed	kg Sb eq	1.48E+0	2.48E-1	5.21E-3	2.29E-2	4.10E-3	3.45E-2	7.56E-3	9.37E-4	0.00E+0	1.16E+0	-6.32E-2
Non hazardous waste disposed	MJ	5.01E+0	2.63E+0	4.14E-1	1.53E-1	3.24E-1	7.79E-1	7.38E-2	7.43E-2	0.00E+0	5.55E-1	-8.19E-1
Radioactive waste disposed (High)	m <sup>3</sup> depriv.	5.97E-5	4.26E-5	5.29E-7	1.89E-6	4.14E-7	5.08E-6	3.52E-6	9.50E-8	0.00E+0	5.60E-6	-9.46E-5
Radioactive waste disposed (Inter-Low)	disease inc.	4.19E-4	2.31E-4	4.75E-5	1.15E-5	3.74E-5	3.78E-5	1.42E-5	8.54E-6	0.00E+0	3.07E-5	-4.23E-4
Components for re-use	kBq U-235 eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for recycling	CTUe	1.01E-1	2.07E-3	0.00E+0	2.47E-2	0.00E+0	7.39E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for energy recovery	CTUh	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Exported energy	CTUh	2.34E+1	0.00E+0	0.00E+0	8.27E-1	0.00E+0	1.13E-1	0.00E+0	0.00E+0	0.00E+0	2.24E+1	0.00E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.3.2. Resources, waste categories and outgoing flows for 75 years

### 4.3.2.1. Resources, waste categories and outgoing flows in case of RECYCLING at end of use

#### RESOURCES, WASTES CATEGORIES AND OUTGOING FLOWS - RECYCLING - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production		Construction		Use		End-of-life			D Benefits & load beyond system boundaries	
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.16E+2	9.16E+0	1.02E-1	1.39E+0	7.97E-2	1.34E+0	7.90E+1	2.44E+1	1.83E-2	9.54E-2	0.00E+0	-4.70E-1
Renewable primary energy used as RM	kg CO <sub>2</sub> eq	3.27E+1	2.40E+0	0.00E+0	9.51E-1	0.00E+0	-9.67E-1	2.55E+1	4.76E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total renewable primary energy	kg CO <sub>2</sub> eq	1.48E+2	1.16E+1	1.02E-1	2.34E+0	7.97E-2	3.72E-1	1.04E+2	2.91E+1	1.83E-2	9.54E-2	0.00E+0	-4.70E-1
Non renewable primary energy excl. RM	kg CO <sub>2</sub> eq	5.37E+2	7.36E+1	7.11E+0	6.71E+0	5.59E+0	1.18E+1	2.17E+2	2.13E+2	1.28E+0	5.44E-1	0.00E+0	-6.42E+1
Non renewable primary energy used as RM	kg CFC11 eq	2.60E+2	6.95E+1	0.00E+0	0.00E+0	0.00E+0	7.67E+0	2.88E+1	1.54E+2	0.00E+0	0.00E+0	0.00E+0	-3.15E+1
Total non renewable primary energy	mol H+ eq	7.97E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	2.46E+2	3.68E+2	1.28E+0	5.44E-1	0.00E+0	-9.56E+1
Use of secondary material	kg P eq	1.20E+0	2.70E-1	0.00E+0	9.32E-2	0.00E+0	3.63E-2	0.00E+0	7.99E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of renewable secondary fuels	kg PO <sub>4</sub> eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of non renewable secondary fuels	kg N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Recovered energy	mol N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Net use of fresh water	kg NMVOC eq	1.14E+0	1.33E-1	8.05E-4	2.82E-3	6.31E-4	1.71E-2	6.76E-1	3.09E-1	1.45E-4	4.66E-4	0.00E+0	-4.70E-2
Hazardous waste disposed	kg Sb eq	1.52E+0	2.48E-1	5.21E-3	2.29E-2	4.10E-3	3.45E-2	5.67E-1	6.33E-1	9.37E-4	8.59E-4	0.00E+0	-6.07E-2
Non hazardous waste disposed	MJ	1.87E+1	2.63E+0	4.14E-1	1.53E-1	3.24E-1	7.79E-1	5.53E+0	8.77E+0	7.43E-2	8.98E-3	0.00E+0	-8.20E-1
Radioactive waste disposed (High)	m <sup>3</sup> depriv.	4.18E-4	4.26E-5	5.29E-7	1.89E-6	4.14E-7	5.08E-6	2.64E-4	1.03E-4	9.50E-8	8.26E-7	0.00E+0	-2.40E-6
Radioactive waste disposed (Inter-Low)	disease inc.	2.19E-3	2.31E-4	4.75E-5	1.15E-5	3.74E-5	3.78E-5	1.06E-3	7.54E-4	8.54E-6	3.12E-6	0.00E+0	1.20E-5
Components for re-use	kBq U-235 eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for recycling	CTUe	9.95E+0	2.07E-3	0.00E+0	2.47E-2	0.00E+0	7.39E-2	0.00E+0	6.63E+0	0.00E+0	3.21E+0	0.00E+0	0.00E+0
Materials for energy recovery	CTUh	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Exported energy	CTUh	2.82E+0	0.00E+0	0.00E+0	8.27E-1	0.00E+0	1.13E-1	0.00E+0	1.88E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.3.2.2. Resources, waste categories and outgoing flows in case of LANDFILL at end of use

### RESOURCES, WASTES CATEGORIES AND OUTGOING FLOWS - LANDFILL - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production		Construction		Use		End-of-life			D Benefits & load beyond system boundaries	
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.15E+2	9.16E+0	1.02E-1	1.39E+0	7.97E-2	1.34E+0	7.90E+1	2.42E+1	1.83E-2	0.00E+0	3.13E-2	0.00E+0
Renewable primary energy used as RM	kg CO <sub>2</sub> eq	3.27E+1	2.40E+0	0.00E+0	9.51E-1	0.00E+0	-9.67E-1	2.55E+1	4.76E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total renewable primary energy	kg CO <sub>2</sub> eq	1.48E+2	1.16E+1	1.02E-1	2.34E+0	7.97E-2	3.72E-1	1.04E+2	2.90E+1	1.83E-2	0.00E+0	3.13E-2	0.00E+0
Non renewable primary energy excl. RM	kg CO <sub>2</sub> eq	5.37E+2	7.36E+1	7.11E+0	6.71E+0	5.59E+0	1.18E+1	2.17E+2	2.14E+2	1.28E+0	0.00E+0	7.19E-1	0.00E+0
Non renewable primary energy used as RM	kg CFC11 eq	2.60E+2	6.95E+1	0.00E+0	0.00E+0	0.00E+0	7.67E+0	2.88E+1	1.54E+2	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total non renewable primary energy	mol H+ eq	7.98E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	2.46E+2	3.68E+2	1.28E+0	0.00E+0	7.19E-1	0.00E+0
Use of secondary material	kg P eq	1.20E+0	2.70E-1	0.00E+0	9.32E-2	0.00E+0	3.63E-2	0.00E+0	7.99E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of renewable secondary fuels	kg PO <sub>4</sub> eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of non renewable secondary fuels	kg N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Recovered energy	mol N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Net use of fresh water	kg NMVOC eq	1.14E+0	1.33E-1	8.05E-4	2.82E-3	6.31E-4	1.71E-2	6.76E-1	3.10E-1	1.45E-4	0.00E+0	9.10E-4	0.00E+0
Hazardous waste disposed	kg Sb eq	1.52E+0	2.48E-1	5.21E-3	2.29E-2	4.10E-3	3.45E-2	5.67E-1	6.33E-1	9.37E-4	0.00E+0	8.29E-4	0.00E+0
Non hazardous waste disposed	MJ	2.83E+1	2.63E+0	4.14E-1	1.53E-1	3.24E-1	7.79E-1	5.53E+0	1.52E+1	7.43E-2	0.00E+0	3.22E+0	0.00E+0
Radioactive waste disposed (High)	m <sup>3</sup> depriv.	4.16E-4	4.26E-5	5.29E-7	1.89E-6	4.14E-7	5.08E-6	2.64E-4	1.01E-4	9.50E-8	0.00E+0	8.27E-8	0.00E+0
Radioactive waste disposed (Inter-Low)	disease inc.	2.20E-3	2.31E-4	4.75E-5	1.15E-5	3.74E-5	3.78E-5	1.06E-3	7.56E-4	8.54E-6	0.00E+0	4.56E-6	0.00E+0
Components for re-use	kBq U-235 eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for recycling	CTUe	3.02E-1	2.07E-3	0.00E+0	2.47E-2	0.00E+0	7.39E-2	0.00E+0	2.01E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for energy recovery	CTUh	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Exported energy	CTUh	2.82E+0	0.00E+0	0.00E+0	8.27E-1	0.00E+0	1.13E-1	0.00E+0	1.88E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0

## 4.3.2.3. Resources, waste categories and outgoing flows in case of INCINERATION at end of use

RESOURCES, WASTES CATEGORIES AND OUTGOING FLOWS - INCINERATION - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use		End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Renewable primary energy excl. RM	kg CO <sub>2</sub> eq	1.18E+2	9.16E+0	1.02E-1	1.39E+0	7.97E-2	1.34E+0	7.90E+1	2.62E+1	1.83E-2	0.00E+0	1.03E+0	-1.09E+1
Renewable primary energy used as RM	kg CO <sub>2</sub> eq	3.27E+1	2.40E+0	0.00E+0	9.51E-1	0.00E+0	-9.67E-1	2.55E+1	4.76E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Total renewable primary energy	kg CO <sub>2</sub> eq	1.51E+2	1.16E+1	1.02E-1	2.34E+0	7.97E-2	3.72E-1	1.04E+2	3.10E+1	1.83E-2	0.00E+0	1.03E+0	-1.09E+1
Non renewable primary energy excl. RM	kg CO <sub>2</sub> eq	7.57E+2	7.36E+1	7.11E+0	6.71E+0	5.59E+0	1.18E+1	2.17E+2	3.60E+2	1.28E+0	0.00E+0	7.40E+1	-7.89E+1
Non renewable primary energy used as RM	kg CFC11 eq	6.58E+1	6.95E+1	0.00E+0	0.00E+0	0.00E+0	7.67E+0	2.88E+1	2.46E+1	0.00E+0	0.00E+0	-6.48E+1	0.00E+0
Total non renewable primary energy	mol H+ eq	8.23E+2	1.43E+2	7.11E+0	6.71E+0	5.59E+0	1.95E+1	2.46E+2	3.85E+2	1.28E+0	0.00E+0	9.19E+0	-7.89E+1
Use of secondary material	kg P eq	1.20E+0	2.70E-1	0.00E+0	9.32E-2	0.00E+0	3.63E-2	0.00E+0	7.99E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of renewable secondary fuels	kg PO <sub>4</sub> eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Use of non renewable secondary fuels	kg N eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Recovered energy	mol Neq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Net use of fresh water	kg NMVOC eq	1.20E+0	1.33E-1	8.05E-4	2.82E-3	6.31E-4	1.71E-2	6.76E-1	3.47E-1	1.45E-4	0.00E+0	1.92E-2	-5.20E-2
Hazardous waste disposed	kg Sb eq	4.99E+0	2.48E-1	5.21E-3	2.29E-2	4.10E-3	3.45E-2	5.67E-1	2.95E+0	9.37E-4	0.00E+0	1.16E+0	-6.32E-2
Non hazardous waste disposed	MJ	2.03E+1	2.63E+0	4.14E-1	1.53E-1	3.24E-1	7.79E-1	5.53E+0	9.86E+0	7.43E-2	0.00E+0	5.55E-1	-8.19E-1
Radioactive waste disposed (High)	m <sup>3</sup> depriv.	4.33E-4	4.26E-5	5.29E-7	1.89E-6	4.14E-7	5.08E-6	2.64E-4	1.12E-4	9.50E-8	0.00E+0	5.60E-6	-9.46E-5
Radioactive waste disposed (Inter-Low)	disease inc.	2.28E-3	2.31E-4	4.75E-5	1.15E-5	3.74E-5	3.78E-5	1.06E-3	8.09E-4	8.54E-6	0.00E+0	3.07E-5	-4.23E-4
Components for re-use	kBq U-235 eq	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for recycling	CTUe	3.02E-1	2.07E-3	0.00E+0	2.47E-2	0.00E+0	7.39E-2	0.00E+0	2.01E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Materials for energy recovery	CTUh	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
Exported energy	CTUh	7.01E+1	0.00E+0	0.00E+0	8.27E-1	0.00E+0	1.13E-1	0.00E+0	4.67E+1	0.00E+0	0.00E+0	2.24E+1	0.00E+0

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.4. Life Cycle Assessment – Carbon emissions and removals

### 4.4.1. Carbon emissions and removals for 1 year

#### 4.4.1.1. Carbon emissions and removals in case of RECYCLING at end of use

##### CARBON EMISSIONS AND REMOVALS - RECYCLING - 1 YEAR - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		C2 Transport	C3 Waste processing	C4 Disposal	
Global Warming	kg CO <sub>2</sub> eq	7.95E+0	5.81E+0	4.65E-1	3.43E-1	0.00E+0	9.82E-1	1.93E-1	8.70E-2	7.13E-2	0.00E+0	-2.90E+0
Ozone depletion TRACI	kg CO <sub>2</sub> eq	4.82E-6	4.15E-6	1.15E-7	5.84E-8	0.00E+0	4.57E-7	1.52E-8	2.00E-8	2.21E-9	0.00E+0	-9.50E-7
Acidification TRACI	kg CO <sub>2</sub> eq	3.08E-2	2.44E-2	1.11E-3	7.60E-4	0.00E+0	3.47E-3	8.19E-4	2.19E-4	9.17E-5	0.00E+0	-1.24E-2
Eutrophication	kg CO <sub>2</sub> eq	8.02E-3	5.97E-3	2.00E-4	3.51E-4	0.00E+0	9.50E-4	4.93E-4	3.71E-5	2.22E-5	0.00E+0	-1.60E-3
Smog	kg CFC11 eq	3.72E-1	2.89E-1	1.67E-2	1.05E-2	0.00E+0	4.34E-2	7.63E-3	3.26E-3	9.54E-4	0.00E+0	-1.16E-1
Fossil fuel depletion	mol H <sup>+</sup> eq	2.15E+1	1.68E+1	1.02E+0	9.57E-1	0.00E+0	2.26E+0	2.67E-1	1.83E-1	3.45E-2	0.00E+0	-1.33E+1
Carcinogenics	kg P eq	1.91E-7	1.47E-7	6.79E-9	8.33E-9	0.00E+0	2.20E-8	4.67E-9	1.25E-9	7.36E-10	0.00E+0	4.60E-8
Non carcinogenics	kg PO <sub>4</sub> eq	1.12E-6	8.27E-7	7.08E-8	2.74E-8	0.00E+0	1.18E-7	5.89E-8	1.30E-8	2.19E-9	0.00E+0	-1.21E-7
Respiratory effects	kg N eq	4.83E-3	3.50E-3	2.41E-4	8.78E-5	0.00E+0	5.38E-4	3.45E-4	4.81E-5	6.84E-5	0.00E+0	-3.14E-4
Ecotoxicity	mol N eq	1.18E+1	7.82E+0	1.25E+0	4.30E-1	0.00E+0	1.17E+0	9.01E-1	2.25E-1	1.68E-2	0.00E+0	-1.53E-1

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.4.1.2. Carbon emissions and removals in case of LANDFILL at end of use

### CARBON EMISSIONS AND REMOVALS - LANDFILL - 1 YEAR - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		C2 Transport	C3 Waste processing	C4 Disposal	
Global Warming	kg CO <sub>2</sub> eq	8.12E+0	5.81E+0	4.65E-1	3.43E-1	0.00E+0	9.82E-1	1.93E-1	8.70E-2	0.00E+0	2.45E-1	0.00E+0
Ozone depletion TRACI	kg CO <sub>2</sub> eq	4.82E-6	4.15E-6	1.15E-7	5.84E-8	0.00E+0	4.57E-7	1.52E-8	2.00E-8	0.00E+0	1.09E-8	0.00E+0
Acidification TRACI	kg CO <sub>2</sub> eq	3.15E-2	2.44E-2	1.11E-3	7.60E-4	0.00E+0	3.47E-3	8.19E-4	2.19E-4	0.00E+0	7.47E-4	0.00E+0
Eutrophication	kg CO <sub>2</sub> eq	8.12E-3	5.97E-3	2.00E-4	3.51E-4	0.00E+0	9.50E-4	4.93E-4	3.71E-5	0.00E+0	1.17E-4	0.00E+0
Smog	kg CFC11 eq	3.77E-1	2.89E-1	1.67E-2	1.05E-2	0.00E+0	4.34E-2	7.63E-3	3.26E-3	0.00E+0	6.23E-3	0.00E+0
Fossil fuel depletion	mol H <sup>+</sup> eq	2.16E+1	1.68E+1	1.02E+0	9.57E-1	0.00E+0	2.26E+0	2.67E-1	1.83E-1	0.00E+0	1.10E-1	0.00E+0
Carcinogenics	kg P eq	1.91E-7	1.47E-7	6.79E-9	8.33E-9	0.00E+0	2.20E-8	4.67E-9	1.25E-9	0.00E+0	1.05E-9	0.00E+0
Non carcinogenics	kg PO <sub>4</sub> eq	1.12E-6	8.27E-7	7.08E-8	2.74E-8	0.00E+0	1.18E-7	5.89E-8	1.30E-8	0.00E+0	3.47E-9	0.00E+0
Respiratory effects	kg N eq	4.80E-3	3.50E-3	2.41E-4	8.78E-5	0.00E+0	5.38E-4	3.45E-4	4.81E-5	0.00E+0	4.01E-5	0.00E+0
Ecotoxicity	mol N eq	1.19E+1	7.82E+0	1.25E+0	4.30E-1	0.00E+0	1.17E+0	9.01E-1	2.25E-1	0.00E+0	1.11E-1	0.00E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.4.1.3. Carbon emissions and removals in case of INCINERATION at end of use

### CARBON EMISSIONS AND REMOVALS – INCINERATION - 1 YEAR - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use	End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation		C2 Transport	C3 Waste processing	C4 Disposal	
Global Warming	kg CO <sub>2</sub> eq	7.95E+0	5.81E+0	4.65E-1	3.43E-1	0.00E+0	9.82E-1	1.93E-1	8.70E-2	7.13E-2	0.00E+0	-2.90E+0
Ozone depletion TRACI	kg CO <sub>2</sub> eq	4.82E-6	4.15E-6	1.15E-7	5.84E-8	0.00E+0	4.57E-7	1.52E-8	2.00E-8	2.21E-9	0.00E+0	-9.50E-7
Acidification TRACI	kg CO <sub>2</sub> eq	3.08E-2	2.44E-2	1.11E-3	7.60E-4	0.00E+0	3.47E-3	8.19E-4	2.19E-4	9.17E-5	0.00E+0	-1.24E-2
Eutrophication	kg CO <sub>2</sub> eq	8.02E-3	5.97E-3	2.00E-4	3.51E-4	0.00E+0	9.50E-4	4.93E-4	3.71E-5	2.22E-5	0.00E+0	-1.60E-3
Smog	kg CFC11 eq	3.72E-1	2.89E-1	1.67E-2	1.05E-2	0.00E+0	4.34E-2	7.63E-3	3.26E-3	9.54E-4	0.00E+0	-1.16E-1
Fossil fuel depletion	mol H <sup>+</sup> eq	2.15E+1	1.68E+1	1.02E+0	9.57E-1	0.00E+0	2.26E+0	2.67E-1	1.83E-1	3.45E-2	0.00E+0	-1.33E+1
Carcinogenics	kg P eq	1.91E-7	1.47E-7	6.79E-9	8.33E-9	0.00E+0	2.20E-8	4.67E-9	1.25E-9	7.36E-10	0.00E+0	4.60E-8
Non carcinogenics	kg PO <sub>4</sub> eq	1.12E-6	8.27E-7	7.08E-8	2.74E-8	0.00E+0	1.18E-7	5.89E-8	1.30E-8	2.19E-9	0.00E+0	-1.21E-7
Respiratory effects	kg N eq	4.83E-3	3.50E-3	2.41E-4	8.78E-5	0.00E+0	5.38E-4	3.45E-4	4.81E-5	6.84E-5	0.00E+0	-3.14E-4
Ecotoxicity	mol N eq	1.18E+1	7.82E+0	1.25E+0	4.30E-1	0.00E+0	1.17E+0	9.01E-1	2.25E-1	1.68E-2	0.00E+0	-1.53E-1

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.4.2. Carbon emissions and removals for 75 years

### 4.4.2.1. Carbon emissions and removals in case of RECYCLING at end of use

#### CARBON EMISSIONS AND REMOVALS - RECYCLING - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production		Construction		Use		End-of-life			D Benefits & load beyond system boundaries	
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Global Warming	kg CO <sub>2</sub> eq	3.77E+1	5.81E+0	4.65E-1	3.43E-1	0.00E+0	9.82E-1	1.44E+1	1.55E+1	8.70E-2	7.13E-2	0.00E+0	-2.90E+0
Ozone depletion TRACI	kg CO <sub>2</sub> eq	1.55E-5	4.15E-6	1.15E-7	5.84E-8	0.00E+0	4.57E-7	1.14E-6	9.60E-6	2.00E-8	2.21E-9	0.00E+0	-9.50E-7
Acidification TRACI	kg CO <sub>2</sub> eq	1.52E-1	2.44E-2	1.11E-3	7.60E-4	0.00E+0	3.47E-3	6.15E-2	6.01E-2	2.19E-4	9.17E-5	0.00E+0	-1.24E-2
Eutrophication	kg CO <sub>2</sub> eq	5.96E-2	5.97E-3	2.00E-4	3.51E-4	0.00E+0	9.50E-4	3.70E-2	1.51E-2	3.71E-5	2.22E-5	0.00E+0	-1.60E-3
Smog	kg CFC11 eq	1.66E+0	2.89E-1	1.67E-2	1.05E-2	0.00E+0	4.34E-2	5.72E-1	7.28E-1	3.26E-3	9.54E-4	0.00E+0	-1.16E-1
Fossil fuel depletion	mol H <sup>+</sup> eq	8.38E+1	1.68E+1	1.02E+0	9.57E-1	0.00E+0	2.26E+0	2.00E+1	4.25E+1	1.83E-1	3.45E-2	0.00E+0	-1.33E+1
Carcinogenics	kg P eq	9.09E-7	1.47E-7	6.79E-9	8.33E-9	0.00E+0	2.20E-8	3.50E-7	3.72E-7	1.25E-9	7.36E-10	0.00E+0	4.60E-8
Non carcinogenics	kg PO <sub>4</sub> eq	7.60E-6	8.27E-7	7.08E-8	2.74E-8	0.00E+0	1.18E-7	4.42E-6	2.12E-6	1.30E-8	2.19E-9	0.00E+0	-1.21E-7
Respiratory effects	kg N eq	3.93E-2	3.50E-3	2.41E-4	8.78E-5	0.00E+0	5.38E-4	2.59E-2	8.97E-3	4.81E-5	6.84E-5	0.00E+0	-3.14E-4
Ecotoxicity	mol N eq	1.00E+2	7.82E+0	1.25E+0	4.30E-1	0.00E+0	1.17E+0	6.75E+1	2.18E+1	2.25E-1	1.68E-2	0.00E+0	-1.53E-1

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.4.2.2. Carbon emissions and removals in case of LANDFILL at end of use

### CARBON EMISSIONS AND REMOVALS - LANDFILL - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use		End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Global Warming	kg CO <sub>2</sub> eq	3.82E+1	5.81E+0	4.65E-1	3.43E-1	0.00E+0	9.82E-1	1.44E+1	1.59E+1	8.70E-2	0.00E+0	2.45E-1	0.00E+0
Ozone depletion TRACI	kg CO <sub>2</sub> eq	1.56E-5	4.15E-6	1.15E-7	5.84E-8	0.00E+0	4.57E-7	1.14E-6	9.62E-6	2.00E-8	0.00E+0	1.09E-8	0.00E+0
Acidification TRACI	kg CO <sub>2</sub> eq	1.54E-1	2.44E-2	1.11E-3	7.60E-4	0.00E+0	3.47E-3	6.15E-2	6.14E-2	2.19E-4	0.00E+0	7.47E-4	0.00E+0
Eutrophication	kg CO <sub>2</sub> eq	5.99E-2	5.97E-3	2.00E-4	3.51E-4	0.00E+0	9.50E-4	3.70E-2	1.53E-2	3.71E-5	0.00E+0	1.17E-4	0.00E+0
Smog	kg CFC11 eq	1.68E+0	2.89E-1	1.67E-2	1.05E-2	0.00E+0	4.34E-2	5.72E-1	7.39E-1	3.26E-3	0.00E+0	6.23E-3	0.00E+0
Fossil fuel depletion	mol H <sup>+</sup> eq	8.40E+1	1.68E+1	1.02E+0	9.57E-1	0.00E+0	2.26E+0	2.00E+1	4.27E+1	1.83E-1	0.00E+0	1.10E-1	0.00E+0
Carcinogenics	kg P eq	9.09E-7	1.47E-7	6.79E-9	8.33E-9	0.00E+0	2.20E-8	3.50E-7	3.73E-7	1.25E-9	0.00E+0	1.05E-9	0.00E+0
Non carcinogenics	kg PO <sub>4</sub> eq	7.60E-6	8.27E-7	7.08E-8	2.74E-8	0.00E+0	1.18E-7	4.42E-6	2.12E-6	1.30E-8	0.00E+0	3.47E-9	0.00E+0
Respiratory effects	kg N eq	3.93E-2	3.50E-3	2.41E-4	8.78E-5	0.00E+0	5.38E-4	2.59E-2	8.92E-3	4.81E-5	0.00E+0	4.01E-5	0.00E+0
Ecotoxicity	mol N eq	1.01E+2	7.82E+0	1.25E+0	4.30E-1	0.00E+0	1.17E+0	6.75E+1	2.20E+1	2.25E-1	0.00E+0	1.11E-1	0.00E+0

# ENVIRONMENTAL PRODUCT DECLARATION



TARALAY IMPRESSION  
HOP COMPACT

According to ISO 14025,  
and EN 15804



## 4.4.2.3. Carbon emissions and removals in case of INCINERATION at end of use

### CARBON EMISSIONS AND REMOVALS - INCINERATION - 75 YEARS - per m<sup>2</sup>

Impacts	Units	Total	Production			Construction		Use		End-of-life			D Benefits & load beyond system boundaries
			A1 Raw materials	A2 Transport	A3 Manufact.	A4 Transport	A5 Installation	B2 Mainten. (75 years)	B4 Replace (75 years)	C2 Transport	C3 Waste processing	C4 Disposal	
Global Warming	kg CO <sub>2</sub> eq	5.24E+1	5.81E+0	4.65E-1	3.43E-1	0.00E+0	9.82E-1	1.44E+1	2.53E+1	8.70E-2	0.00E+0	4.98E+0	-9.14E+0
Ozone depletion TRACI	kg CO <sub>2</sub> eq	1.58E-5	4.15E-6	1.15E-7	5.84E-8	0.00E+0	4.57E-7	1.14E-6	9.76E-6	2.00E-8	0.00E+0	8.20E-8	-6.21E-7
Acidification TRACI	kg CO <sub>2</sub> eq	1.58E-1	2.44E-2	1.11E-3	7.60E-4	0.00E+0	3.47E-3	6.15E-2	6.45E-2	2.19E-4	0.00E+0	2.33E-3	-2.53E-2
Eutrophication	kg CO <sub>2</sub> eq	6.07E-2	5.97E-3	2.00E-4	3.51E-4	0.00E+0	9.50E-4	3.70E-2	1.58E-2	3.71E-5	0.00E+0	3.81E-4	-5.88E-3
Smog	kg CFC11 eq	1.79E+0	2.89E-1	1.67E-2	1.05E-2	0.00E+0	4.34E-2	5.72E-1	8.14E-1	3.26E-3	0.00E+0	4.38E-2	-2.51E-1
Fossil fuel depletion	mol H <sup>+</sup> eq	8.51E+1	1.68E+1	1.02E+0	9.57E-1	0.00E+0	2.26E+0	2.00E+1	4.34E+1	1.83E-1	0.00E+0	4.72E-1	-1.01E+1
Carcinogenics	kg P eq	1.03E-6	1.47E-7	6.79E-9	8.33E-9	0.00E+0	2.20E-8	3.50E-7	4.53E-7	1.25E-9	0.00E+0	4.11E-8	-7.79E-8
Non carcinogenics	kg PO <sub>4</sub> eq	8.23E-6	8.27E-7	7.08E-8	2.74E-8	0.00E+0	1.18E-7	4.42E-6	2.54E-6	1.30E-8	0.00E+0	2.13E-7	-5.36E-7
Respiratory effects	kg N eq	4.00E-2	3.50E-3	2.41E-4	8.78E-5	0.00E+0	5.38E-4	2.59E-2	9.39E-3	4.81E-5	0.00E+0	2.77E-4	-1.82E-2
Ecotoxicity	mol N eq	1.23E+2	7.82E+0	1.25E+0	4.30E-1	0.00E+0	1.17E+0	6.75E+1	3.72E+1	2.25E-1	0.00E+0	7.68E+0	-3.27E+0

# ENVIRONMENTAL PRODUCT DECLARATION

**Gerflor**

TARALAY IMPRESSION  
HOP COMPACT

Ac

## 5. Additional Environmental Information

### 5.1. Environment and Health During Manufacturing

Gerflor's factory conforms to :

- ISO 9001 Quality Management System,
- ISO 14001 Environmental Management System,
- ISO 50001 Energy Management System,

Gerflor uses 100% certified renewable electricity in its plants.

### 5.2. Environment and Health During Installation

The manufacturer's guidelines should be adhered to during the installation of this product.

### 5.3. Environment and Health During the use stage

The product is certified FloorScore. The measured concentration of total volatile organic compounds (TVOC) is less than/equal to 0.5 mg/m<sup>3</sup> (in accordance with CDPH/EHLB Standard Method v1.2-2017).

The product is not exposed to soil and water during the use stage.

## 6. References

### ISO 14025

ISO 14025:2006 : Environmental labels and declarations — Type III environmental declarations — Principles and procedures

### EN 15804

EN 15804:2012-04+A2 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

### UL Environment

UL Environment General Program Instructions March2022 Version 2.7

### UL Standard 10010. PCR Part A

PCR -Part A: Life Cycle Assessment Calculation Rulesand Report Requirements. Version 4.0. UL Environment.  
<https://industries.ul.com/environment>

### UL 10010-7. PCR Part B

PCR - Part B: Flooring EPD Requirements. Second Edition. Dated September 28. 2018. UL Environment.  
<https://www.ul.com/>

### Ecoinvent V3.8

Ecoinvent Life Cycle Inventory database Version 3.8  
<http://www.ecoinvent.org>