


# REZILLSLEEPER™ - FLOATING SYSTEM

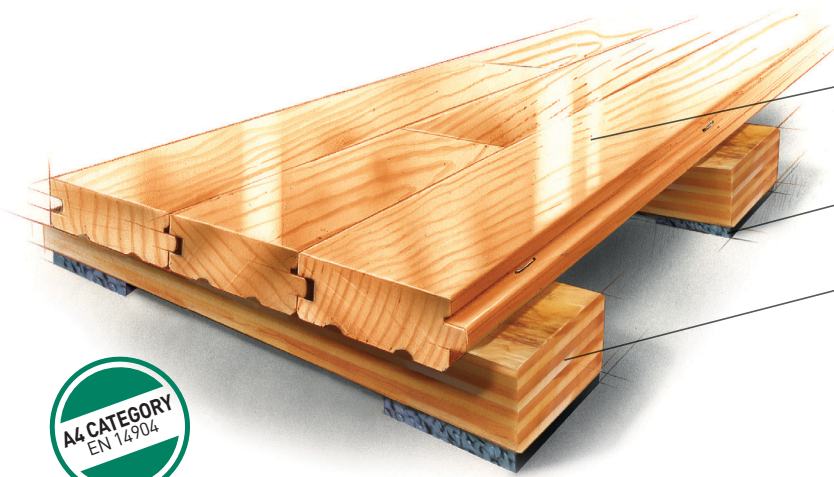

## FLOORING

North American Maple  
Thickness 20 mm / Width 57 mm

## RESILIENCE

12 mm Rezill pads

## SUBFLOOR CONSTRUCTION

Plywood sleepers  
Thickness: 24 mm / length of each sleeper: 2.44 m




Manufacturing:  
ISO 14001:2004  
CERTIFIED



**Recycled Contribution:**  
RezillSleeper™ Subfloor System  
includes components with  
recycled content

## ONE MATERIAL, THREE NATURAL GRADES

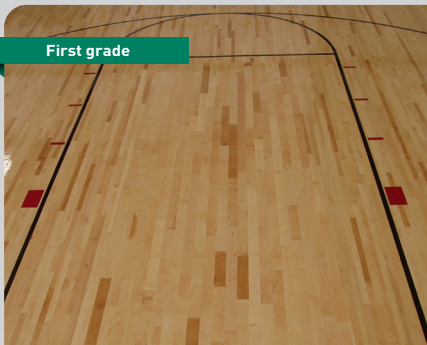


## PARTNER OF MAJOR SPORTS EVENTS



# REZILLSLEEPER™ FLOATING SYSTEM



- 1 Vented Cove Base (76 mm x 102 mm)
- 2 Expansion Space (38 mm)
- 3 Vapor Barrier
- 4 Maple strips (20 mm x 57 mm)
- 5 Rezill Pad
- 6 RezillSleeper™

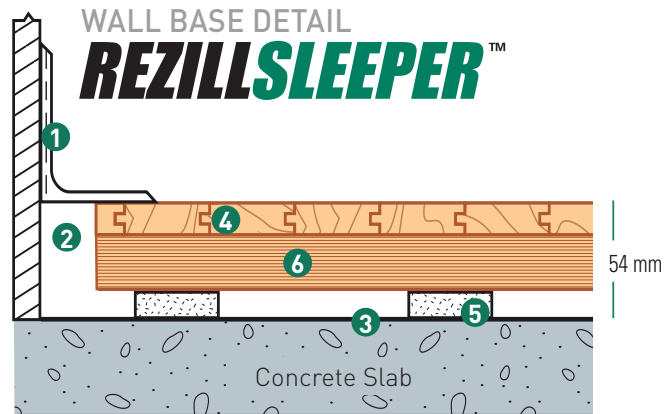

## PRODUCT CHARACTERISTICS

STANDARD	REQUIREMENT	UNIT	RESULTS	
<b>PRODUCT DESCRIPTION</b>				
Finish Flooring	-	-	Hardwood Maple Strip Flooring	
Sub-Floor	-	-	Plywood sleepers 2.44 m x 7.62 cm x 2.46 cm	
-	-	-	Rezill R4 pads: 5.08 cm x 5.08 cm x 1.27 cm and polyurethane bound compressed rubber fibers	
Thickness	EN 428	mm	54	
<b>SPORT PROPERTIES</b>				
Shock absorption	EN 14808	≥ 25	%	≥ 55
Vertical deformation	EN 14809	≤ 5	mm	≤ 5
Sliding coefficient	EN 13036-4	80 to 110	-	80 - 110
Ball bounce	EN 12235	≥ 90	%	≥ 90
<b>TECHNICAL CHARACTERISTICS</b>				
Abrasion resistance	EV ISO 5470-1	≤ 0.08	g	≤ 0.08
Impact resistance	EN 1517	≥ 8	N/m	No damage
Indentation resistance	EN 1516	≤ 0.5	mm	No damage
<b>CLASSIFICATION</b>				
Fire	EN 13501-1	-	-	
<b>DECLARATION OF PERFORMANCE</b>				
-	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Resistance to rolling load Resistance to wear	