

# TARASAFE IMPRESSION WOOD

IN STOCK NOW



| Safety flooring that is slip resistant, tough and offers outstanding performance



0672 Loft White  
LRV: 44.8 - WR: 0585 0097



0373 Noma Ice  
LRV: 45.9 - WR: 0585 0620



1070 Habana 3D Vinales  
LRV: 38.5 - WR: 0585 2481 **NEW**



0592 Ottawa Poplar  
LRV: 28.1 - WR: 0585 0074



0519 Noma Beige  
LRV: 30.2 - WR: 0585 2762



0371 Noma Rustic  
LRV: 24.3 - WR: 0585 2336



0723 Charme Pecan  
LRV: 22.3 - WR: 0585 2926 **NEW**



1713 Esterel Fréjus  
LRV: 15.9 - WR: 0585 2486




1069 Habana 3D Trinidad  
LRV: 23.8 - WR: 0585 2413 **NEW**




0518 Esterel Chocolate  
LRV: 15.8 - WR: 0585 2662



0520 Noma Black  
LRV: 11.3 - WR: 0585 2918

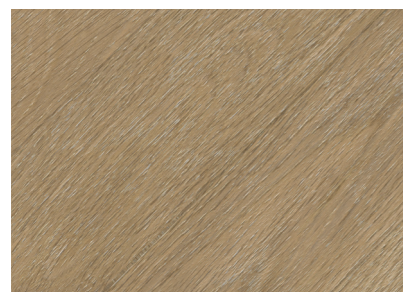

1110 Rivau Nature  
LRV: 25.5 - WR: 0585 2481 **NEW**

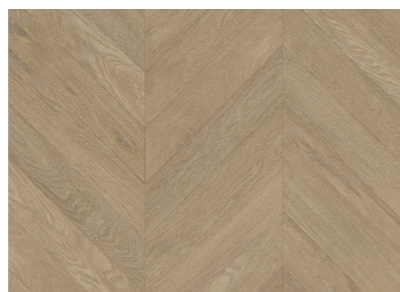

1110 Rivau Nature  
Herringbone Example

Compact sheet without foam backing  
**LRV:** Light Reflectance Value  
**WR:** Welding Rods - Subject to change. Please confirm when ordering.

**Gerflor**

**Gerflor**

Class 34

Safety Flooring

# TARASAFE IMPRESSION MINERAL

IN STOCK NOW



| Safety flooring that is slip resistant, tough and offers outstanding performance




1029 Rough Grey  
LRV: 31.6 - WR: 0585 2227 **NEW**



1028 Rough Beige  
LRV: 37.1 - WR: 0585 0386 **NEW**



0523 Genova  
LRV: 40.9 - WR: 0585 0645

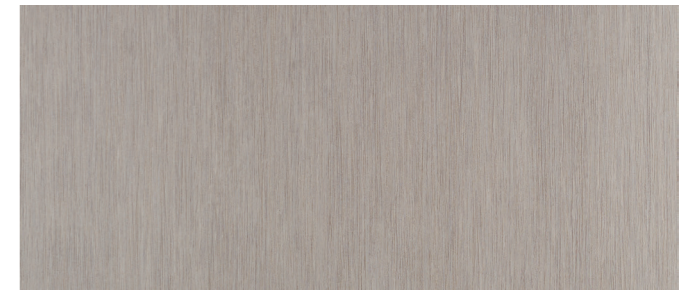

0680 Infinity Greige  
LRV: 30.9 - WR: 0585 0613



0035 Gris  
LRV: 21.6 - WR: 0585 0016



0038 Pierre  
LRV: 32.9 - WR: 0585 0645



0543 Brescia  
LRV: 34.0 - WR: 0585 2227



0525 Modena  
LRV: 13.8 - WR: 0585 2566

Compact sheet without foam backing  
**LRV:** Light Reflectance Value  
**WR:** Welding Rods - Subject to change. Please confirm when ordering.

**Gerflor**

# TARASAFE IMPRESSION SAFETY FLOORING

The Tarasafe Impression Collection is a stunning safety flooring range that comprises of realistic wood and mineral finishes. It is suitable for heavy traffic areas, and is ideal for contract applications in healthcare, education, retail and other markets. The Tarasafe Impression Wood and Mineral range offers Safety in Numbers, PTV 36+ slip resistance, R11 wet slip resistance rating and >20 Rtm/Rz surface roughness in accordance with HSE guidelines. The revolutionary ProtecSol® Control surface treatment ensures no polish for the entire lifetime of the product.

PRODUCT DESCRIPTION	STANDARD	UNIT	TARASAFE IMPRESSION
Total thickness	EN ISO 24346	mm	2.00
Thickness of the wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m <sup>2</sup>	2635
Width of sheet	EN ISO 24341	cm	200
Length of sheet	EN ISO 24341	lm	25
<b>CLASSIFICATION</b>			
Norm / Product Specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	B <sub>fl</sub> -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance: Pendulum test <sup>(1)</sup>	EN 16165:2021 - Appendix C (BS 7976-2)	PTV	> 36
Surface roughness Rtm	-	µm	Rz ≥ 20
Slip resistance wet: Ramp test	EN 16165:2021- Appendix B (DIN 51130)	class	R11
<b>PERFORMANCES</b>			
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Wear group	NF 189	group	T
Type binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Residual indentation (measure)	-	mm	≈ 0.03
Impact sound insulation	EN ISO 717-2	dB	8
Castor chair test (type W)	EN ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	ProtecSol® Control
Chemical products resistance	EN ISO 26987	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) <sup>(2)</sup>	ISO 22196	-	> 99% Inhibits growth
<b>ENVIRONMENT/INDOOR AIR QUALITY</b>			
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 70
Certification	-	-	Floorscore®
<b>CE MARKING</b>			
CE	EN 14041		

<sup>(1)</sup> The RRL wet pendulum test is expressed as a Pendulum Test Value (PTV) and a Slip Resistance Value (SRV) to show that the test was carried out using a 4S rubber resistor pad in accordance HSE guidance.

<sup>(2)</sup> The implementation of an effective cleaning regime is the best defence against infection.

**IMPORTANT:** The information contained in this document is valid from 01/04/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force. Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Tarasafe Impression Safety Flooring replaces Taralay Impression Control.

**For more information please contact us**

UNITED KINGDOM

+44 (0) 1625 428 922

contractuk@gerflor.com

www.gerflor.co.uk

REPUBLIC OF IRELAND

+353 (0) 42 966 1431

gerflorirl@gerflor.com

www.gerflor.ie




Uniclass Pr_35_57_71_76
CI / SIF (43) Tn6

UK reference - April 2023

**Gerflor**

**IN STOCK  
FOR FAST  
DELIVERY**

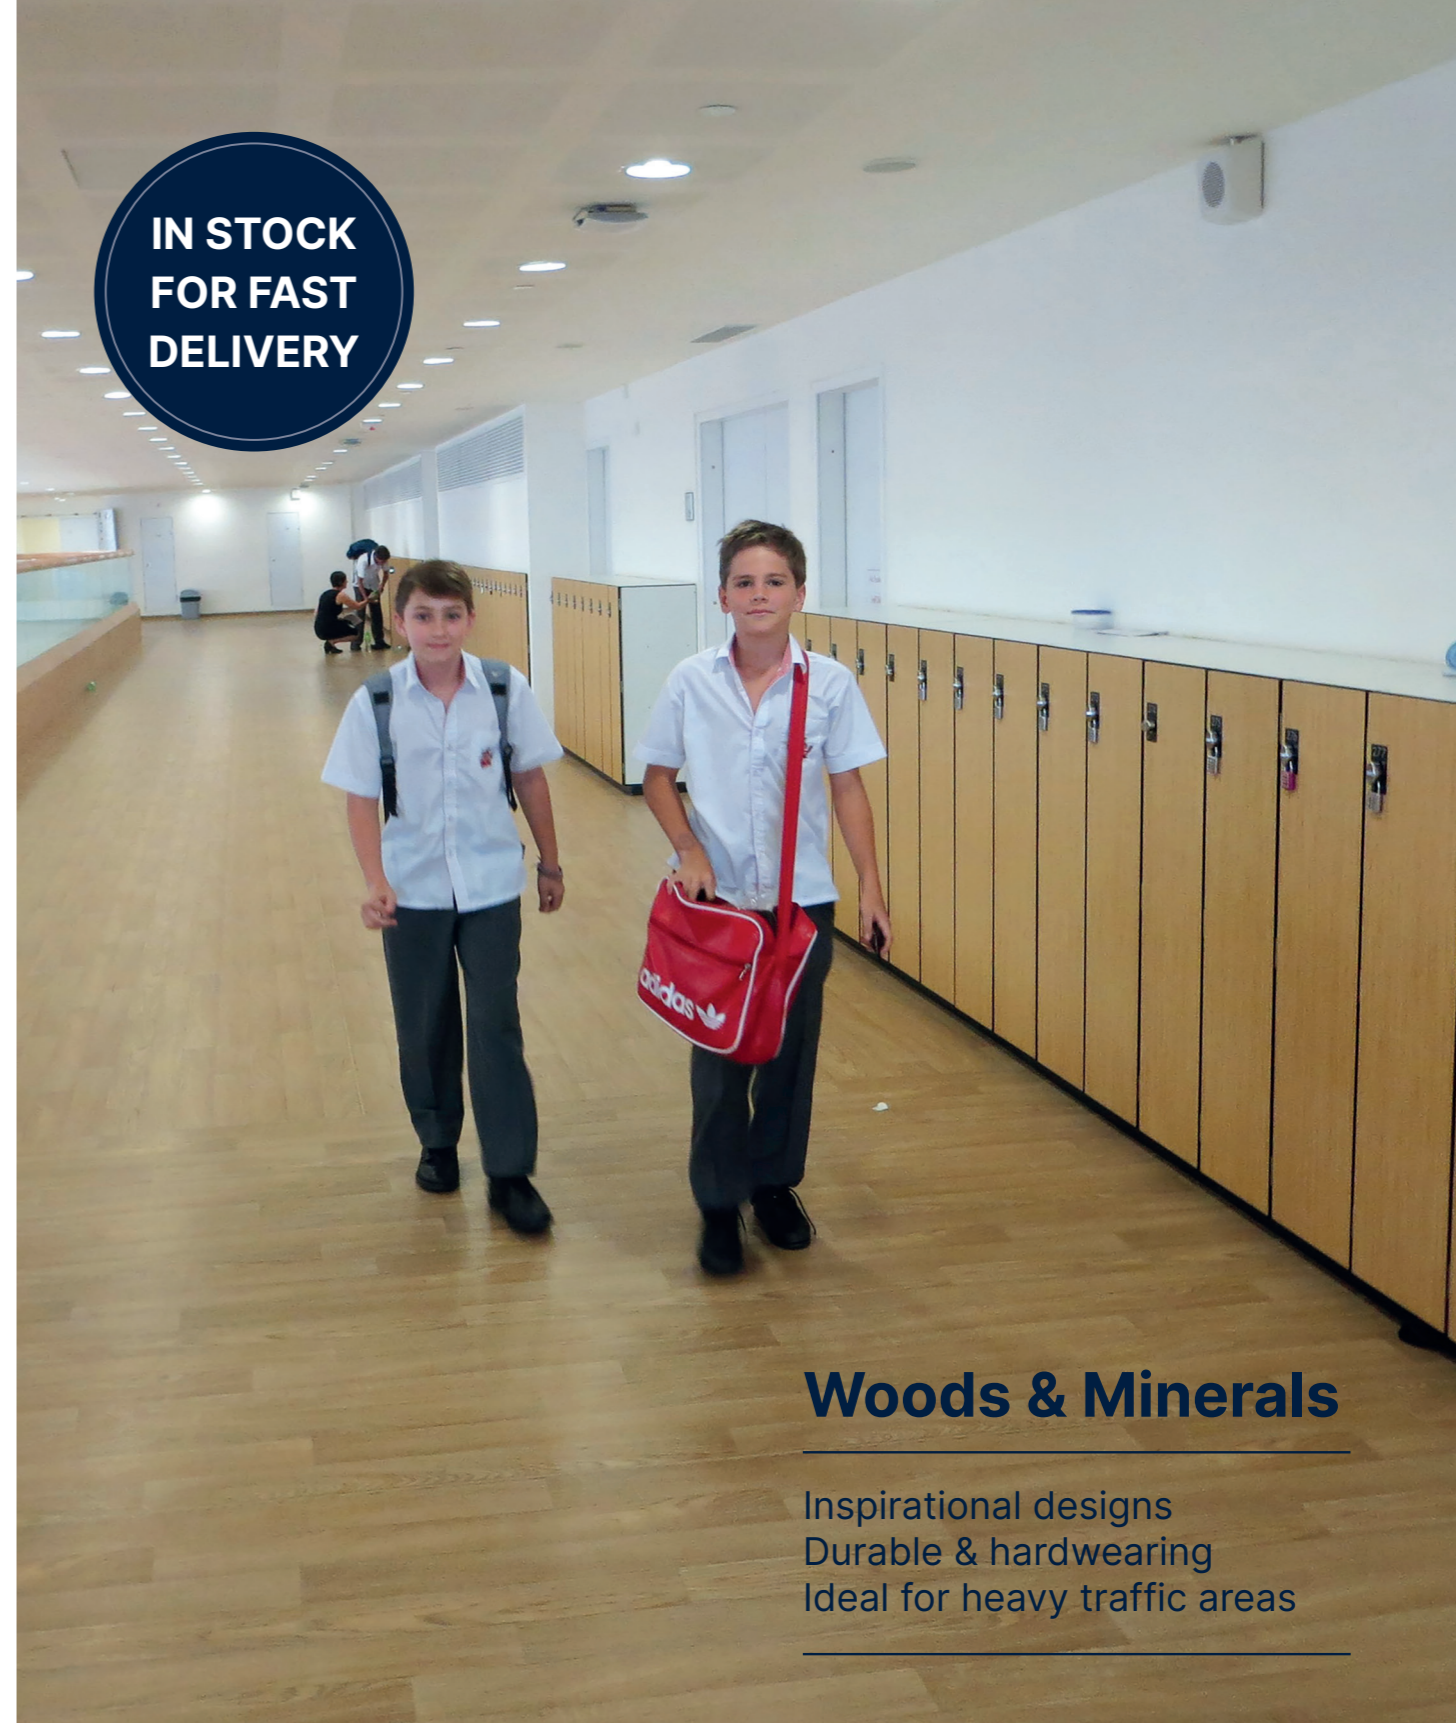

**Woods & Minerals**

Inspirational designs  
Durable & hardwearing  
Ideal for heavy traffic areas

**Tarasafe Impression**

Safety Flooring

**Gerflor**