



## Shower System

**Gerflor**<sup>®</sup>

# The reference for hardworking wet rooms



**Mix & Match Floors & Walls, coordinate with Gerflor collections**



**Coloured backing for a perfect wall welding**



**Guaranteed hygiene and easy cleaning**



**Hardwearing and a watertight system**



**Non-slip performance for patient, residents and employees**



**A complete solution with drains, thresholds and profiles**



**Up to 30% recycled content & 100% recyclable**



Mural Calypso: 7025 Arty Beige  
Tarasafe Ultra: 6348 Clay

# A coordinated solution of Walls and Floors for every wet room!



ELDERLY PEOPLE HOME




HOTELS



HOUSING



LOCKERS

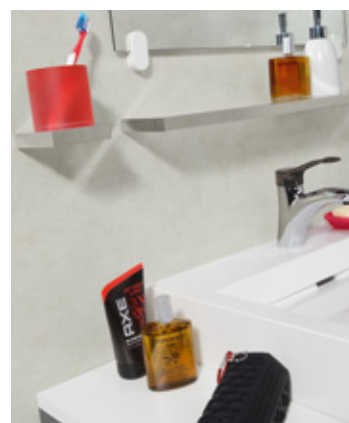

STUDENT RESIDENCE



HOSPITAL / CLINIC

## Summary

4. Mix and Match collections that are designed for all your spaces
5. The perfect Mix & Match solution!
6. Designs that combine aesthetics with easy installation
8. The Shower System benefits
10. LRV & NCS values
12. Finishes for wet rooms with drains
18. Find out more...
19. Get trained to install our solutions!
19. Taradouche system is eligible for the Second Life Programme

Find out more on [gerflor.com](https://www.gerflor.com)


Find us on social media:



Installation guidelines available on our Gerflor website

# Mix and Match collections designed for all your spaces

Our Artistic Department creates interior decors with coordinated textures and colours for a coherent and harmonious finish. Ideal for a variety of environments, whilst respecting any constraints within your building.

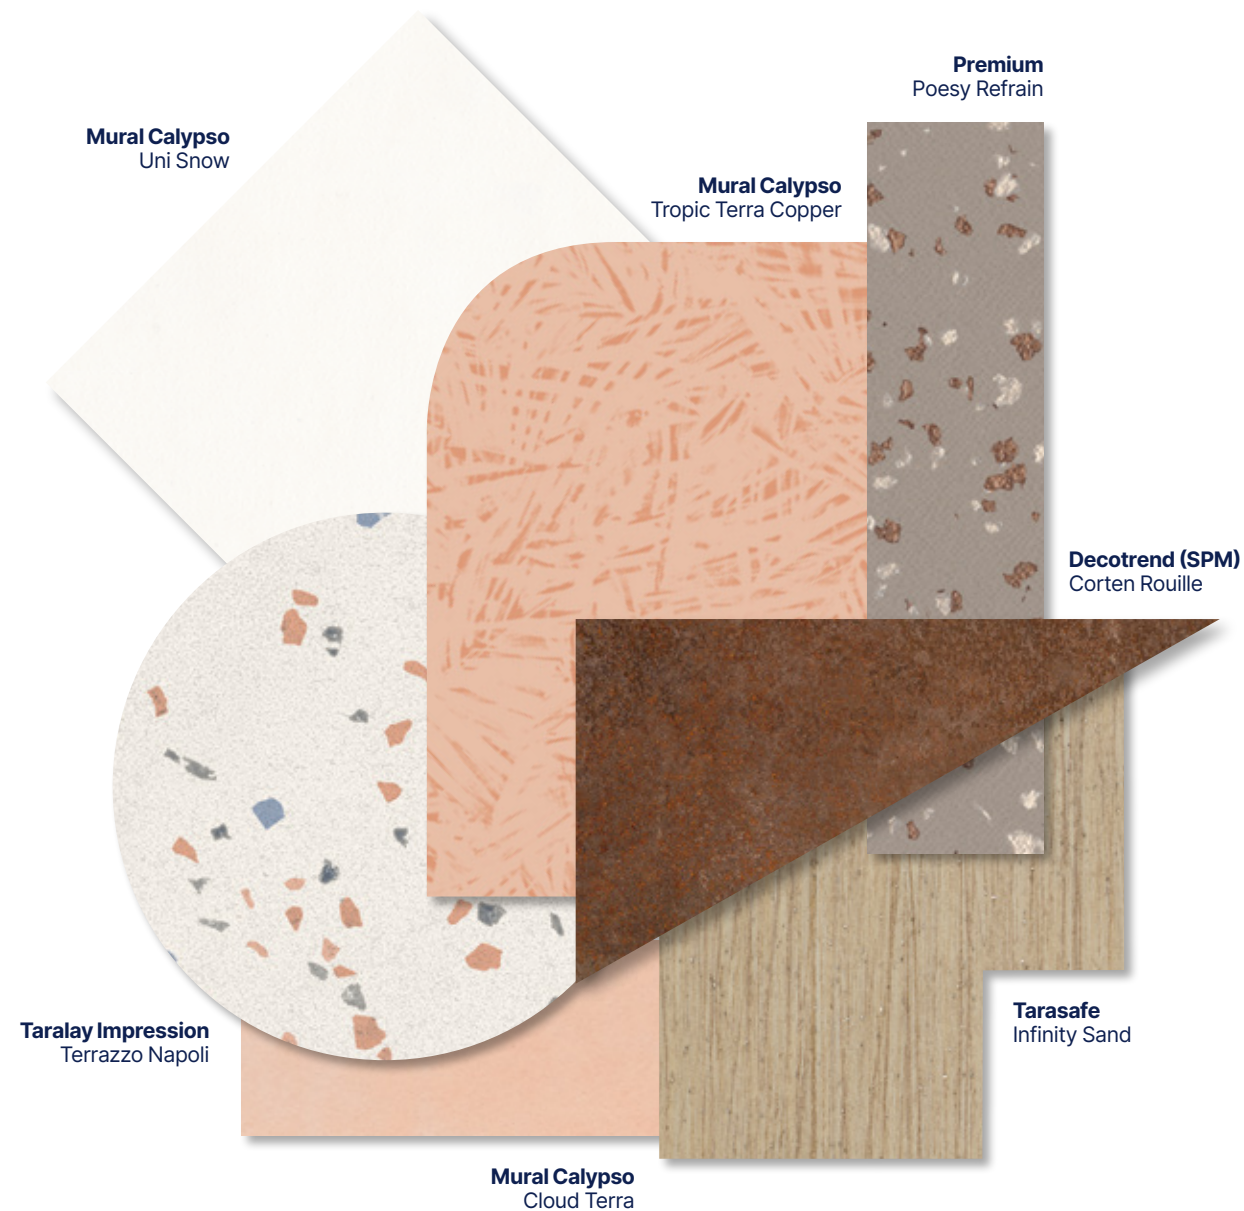

# The perfect Mix & Match solution!


## Endless floor & wall combinations

With our revolutionary Shower System of Floor & Wall covering finishes, you can create a calm, lively, or cosy atmosphere. You are free to create the style of your dreams because our collections are made to complement perfectly!



## Snow & Lotus colour bases and associated patterns

Selected Mural Calypso designs have been created with a perfectly matched base colour to mark out spaces in the shower

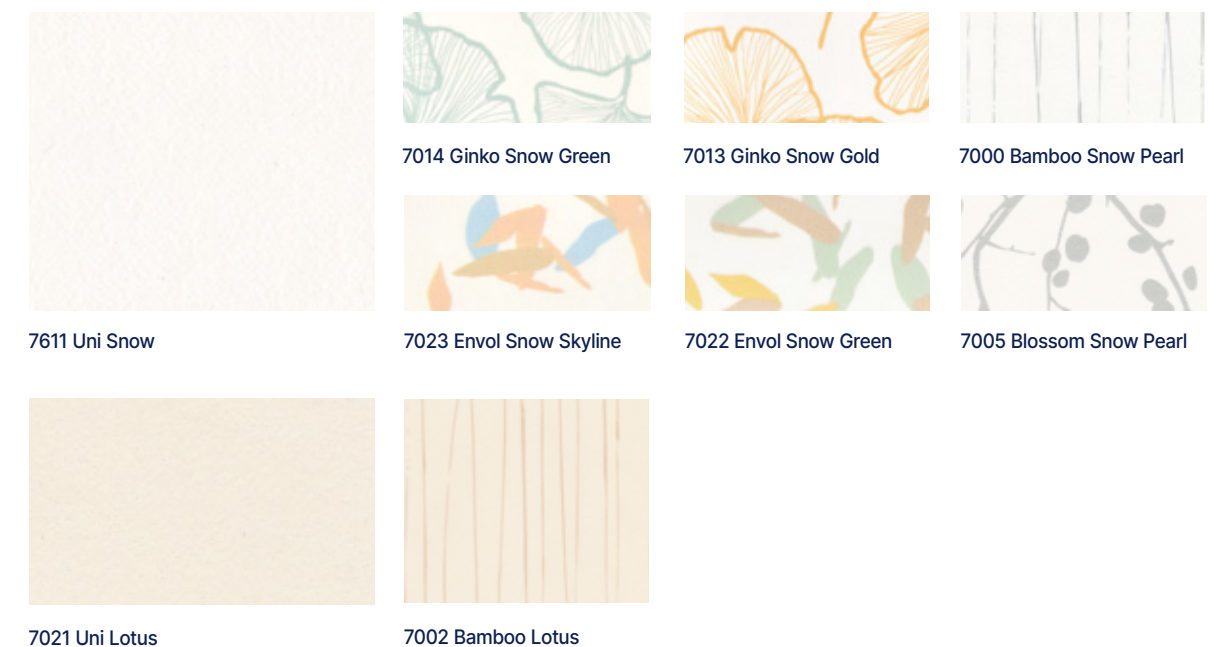

# Designs that combine aesthetics with easy installation



## COLOURED BACKING FOR A PERFECT WALL WELDING

During levelling, after welding, a light line may appear. This is the backing of the covering, which has melted slightly during welding. Thanks to a backing that is the same colour as the weld, the phenomenon remains but becomes invisible, giving the weld a seamless finish.




Standard backing



Coloured backing



## DESIGNS THAT CAN BE INSTALLED VERTICALLY OR HORIZONTALLY!



## DESIGN REPETITION


The designs in the Mural Calypso and Tarasafe ranges have variable pattern repetition. Additional details about the six flooring options and the thirteen wall alternatives are provided below.

### Mural Calypso

Design name	Length-wise design repetition (mm)
Arty	2000×1000
Bamboo	2000×1100
Blossom	2000×1100
Cloud	-
Envol	2000×6000
Fabric	2000×1100
Ginko	2000×1100
Manhattan	2000×1210
Nordic	2000×1100
Tropic	2000×1100
Uni	-
Venice	2000×1000
Verona	2000×2000

### Tarasafe Design

Design name	Length-wise design repetition (mm)
Esterel Clear New	2000×1000
Esterel Blossom New	2000×1000
Esterel Nut New	2000×1000
Lorca Natural New	2000×1270
Lofter dark grey New	2000×3000
Infinity Sand	2000×1000

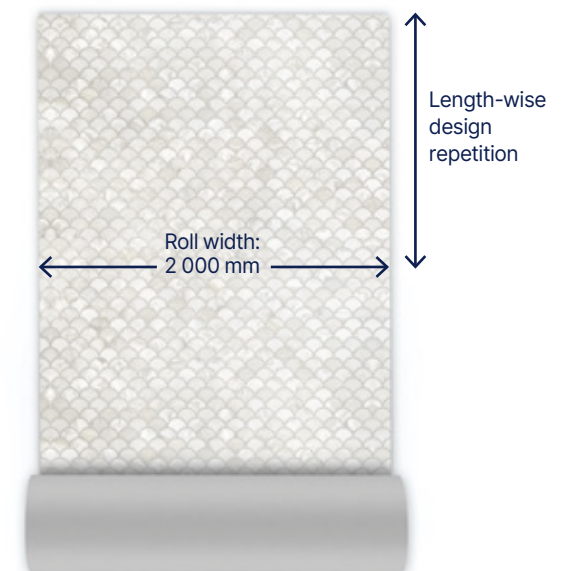

# The Shower System benefits



## OUTSTANDING HYGIENE AND EASY CLEANING

- Smooth washable products
- Cove formers for simple cleaning in corners
- Effortless and low-cost cleaning with a mop or sponge
- Protective surface treatment on Tarasafe



## COORDINATED COLOURS AND DESIGNS

- More than 1,000 floor & wall combinations to create a restful, cosy, bright or calming atmosphere!
- The possibility of creating a tone-on-tone ambiance with no sudden break between the shower and bedroom is ideal for Alzheimer's units, thanks to a shower threshold available in 3 colours
- Mural Calypso available with a coloured backing for a perfect wall welding (see page 6)



## HARDWEARING, WATERTIGHT INSTALLATION

- 100% watertight system (floor/wall/finishes)
- Floor and wall coverings can be hot welded
- Mural Calypso can be installed vertically or horizontally




## SAFETY FOR PATIENTS, RESIDENTS AND EMPLOYEES

- Compliant with slip resistance standards for barefoot and shod applications (DIN 51097, DIN 51130 and EN 13845)
- Compliant with most «access to all» laws (suitable for wet rooms)
- Compliant with industry fire safety standards (EN 13501) for flooring and wallcoverings (B-s2,d0) with the Mural Calypso product range
- R11 rating available on Tarasafe H20 / Ultra H20



## ECO-FRIENDLY SOLUTION

- 100% recyclable products
- Made in Europe in ISO 14001-certified factories
- Up to 50% recycled or mineral material
- Raw and recycled materials are fully REACH compliant
- Low VOC emissions
- Products eligible for the Gerflor «Second Life» programme

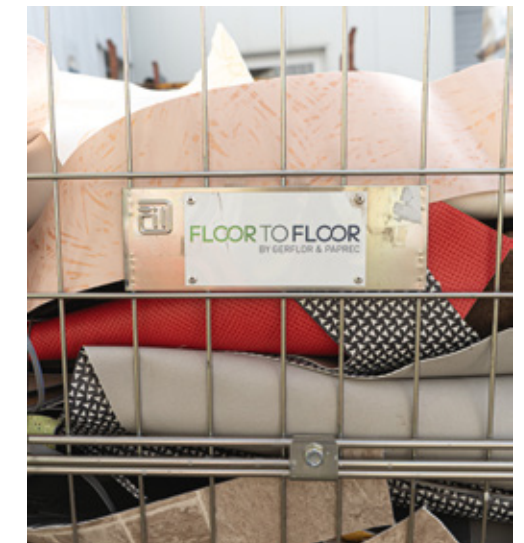

# LRV & NCS values

Product Range	Colour code	Colourway	NCS	LRV Light Reflectance Value (Brightness)
TARASAFE ULTRA	6088	Andalusite	3020-Y40R	35.9
	8592	Aventurine	3030-G	32.6
	8420	Azurite	4030-B	17.1
	3183	Bauxite	4010-Y50R	28.3
	7724	Calcium	2002-Y	53.3
	6348	Clay	3005-Y20R	38.7
	7307	Copper	4040-Y80R	18.5
	7383	Diopside	1005-Y20R	59.6
	6593	Epidote	5020-B30G	19.1
	7792	Galena	4502-B	28.8
	8709	Granite	5502-B	25.4
	7482	Halite	3030-R90B	31.8
	2432	Larimar	3030-B10G	26.3
	9127	Meteorite	5030-R90B	11.7
	8717	Obsidian	7502-B	10.1
	8701	Opal	1500-N	59.1
8704	Pebble	3000-N	44.1	
6591	Serpentine	3010-G	32.4	

Product Range	Colour code	Colourway	NCS	LRV Light Reflectance Value (Brightness)	
TARASAFE STANDARD	6245	Atoll	2030-B10G	41.1	
	6084	Badian	4020-Y70R	20.9	
	7767	Dove Grey	3502-G	34.1	
	7618	Edelweiss	1505-Y10R	57.9	
	6085	Grizzly	6005-Y80R	19.2	
	7315	Jute	3020-Y40R	30.8	
	6589	Leaf	4020-B90G	25	
	7731	Marbre	2002-B	51.2	
	7801	Noir	9000-N	5.7	
	8102	Paprika	3040-Y80R	21.9	
	2430	Rain Drop	2040-R90B	32.5	
	7709	Royal Blue	4040-R80B	15.3	
	7386	Savana	2005-Y50R	44.3	
	7773	Storm	5502-B	21.3	
	TARASAFE DESIGN	6083	Esterel Blossom New	4005-Y20R	29.3
		6078	Esterel Clear New	4010-Y30R	32.4
6079		Esterel Nut New	6005-Y20R	20.8	
6094		Infinity Sand	4010-Y30R	36.3	
6171		Lofter Dark Grey	5005-Y80R	27.9	
5755	Lorca Natural New	4502-Y	23.1		

Product Range	Colour code	Colourway	NCS	LRV Light Reflectance Value (Brightness)
TARASAFE ULTRA H2O	7413	Ocean Blue	3030-R90B	31.8
	7720	Iceberg	1002-B	60.6
	7325	Seashore	1005-Y20R	63.0
	7746	Stone	5502-B	23.6
	7732	Gravel	7502-B	9.7
	TARASAFE H2O	0036	Lagoa*	3020-R90B
0025		Nile*	3010-Y50R	43.4
0032		Malawi*	3005-Y50R	40.1
0031		Eacham*	4005-Y50R	34.3
0034		Zambezi*	5502-B	19.9
0033		Rhine*	4000-N	29.7
0024		Peyto*	3000-N	43.7
0035		Bacalar*	4010-G30Y	32.5
MURAL CALYPSO	7025	Arty Beige	1505-Y30R	58
	7026	Arty Grey	1502-B	61.3
	7002	Bamboo Lotus	1005-Y20R	73.3
	7000	Bamboo Snow Pearl	0502-Y	80.2
	7005	Blossom Snow Pearl	0502-Y	75.6
	7018	Cloud Green*	2010-G	53.8
	7010	Cloud Haze*	1502-G50Y	62.3

Product Range	Colour code	Colourway	NCS	LRV
MURAL CALYPSO	7711	Cloud Ice*	1002-G	70.7
	7311	Cloud Linen*	1505-Y40R	56.5
	7309	Cloud Lotus*	0804-Y30R	75.5
	7201	Cloud Moonlight*	0530-Y10R	70.5
	7017	Cloud Pink*	1515-R	56.4
	7408	Cloud Skyline*	1515-R90B	56.8
	7019	Cloud Terra*	1515-Y70R	51
	7022	Envol Snow Green	0502-G	75
	7023	Envol Snow Skyline	0502-B	74.8
	7740	Fabric Silk*	1502-Y	58.8
	7013	Ginko Snow Gold	0500-N	77
	7014	Ginko Snow Green	0500-N	77
	7721	Manhattan Mist*	1502-Y	64.6
	7744	Nordic Milk	1502-Y	67.5
	7015	Tropic Skyline	1015-R80B	60.1
	7016	Tropic Terra Copper	1515-Y70R	51.1
	7020	Uni Ice*	1002-Y	71.7
	7021	Uni Lotus*	1002-Y50R	71.9
	7611	Uni Snow*	0502-G50Y	82.8
	7024	Venice	1000-N	68
7027	Verona	1502-Y50R	65.2	

For welding rods, see Gerflor website.

\* DSDC accredited references : get more details on page 13

# Gerflor products help you to age well

These days, ageing well is a social challenge. In this context, supporting people who have dementia is the focus of numerous discussions.

**What is dementia?** Dementia is a syndrome that occurs in numerous neurological diseases (one of the most well-known being Alzheimer's disease), caused by progressive degeneration of certain neurons. These pathologies affect the memory, thoughts, behaviour and the ability to perform daily activities.

Gerflor is committed to helping towards ageing comfortably by developing designs and colours to suit these medical conditions.

Below are some key points for choosing a suitable flooring



### Contrasting colours

Sections of the same area (floors, walls, accessories) must be in contrasting colours in order to improve the three-dimensional perception of the different spaces and thus encourage movement. It is also important to take into account the light reflectance value (LRV\*) of the different sections.


> All the LRVs in Gerflor ranges are available on our website and our communication tools.



### 'Soft' and almost plain patterns

Heavily patterned flooring or flooring with busy patterns should be avoided, as well as the colour black, which could lead to blocking reactions due to visual barriers. We therefore recommend choosing soft patterns.

> Many designs and colours in Gerflor's ranges have semi-plain or almost plain patterns that are perfectly suitable.



### Matt flooring

In addition to the more realistic look, matt flooring is perceived as more secure. In fact, shiny floors can look wet, making people with dementia hesitant and increase the risk of falling.

> The latest-generation surface treatments developed by Gerflor (Protecsol® 2, Evercare™ in particular) give the products a matt appearance.



### Acoustic comfort

You should opt for acoustic products that will reduce ambient noise and create a more calm and peaceful environment.

> Many of the Gerflor collections provide sound insulation. For example, Taralay Impression offers 19 dB (acoustic version) and 8 dB (compact version) sound insulation products.



\*LRV: Light Reflectance Value



The Dementia Services Development Center at the university of Stirling has approved Tarasafe H2O & Mural Calypso for use within a dementia-inclusive environment

### Development Centre.


This organisation is an independent and internationally recognised centre of knowledge and expertise dedicated to improving the lives of people with dementia.

### Safety flooring

Product Range	Colour code	Colourway	DSDC Stirling Rating
TARASAFE H2O	0036	Lagoa	1b
	0025	Nile	1b
	0032	Malawi	1b
	0031	Eacham	1b
	0034	Zambezi	1b
	0033	Rhine	1b
	0024	Peyto	1b
	0035	Bacalar	1b

### Wall covering

Product Range	Colour code	Colourway	DSDC Stirling Rating
MURAL CALYPSO	7018	Cloud Green	1b
	7010	Cloud Haze	1b
	7711	Cloud Ice	1b
	7311	Cloud Linen	1b
	7309	Cloud Lotus	1b
	7201	Cloud Moonlight	1b
	7017	Cloud Pink	1b
	7408	Cloud Skyline	1b
	7019	Cloud Terra	1b
	7740	Fabric Silk	1b
	7721	Manhattan Mist	2
	7020	Uni Ice	1a
	7021	Uni Lotus	1a
	7611	Uni Snow	1a

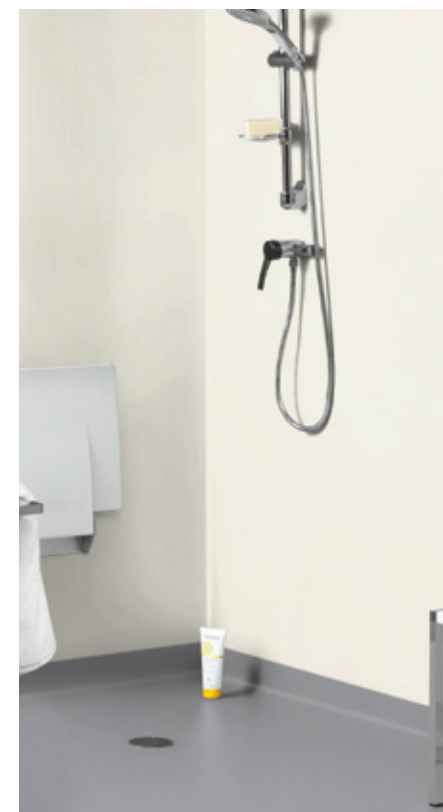


The DSDC Accredited product logo is awarded on the merit of the individual product and colourway. This accreditation does not merit the final application. Whilst every endeavor has been made to ensure the ratings are reflective of the product's suitability and applied use at the time of print, DSDC cannot be held responsible for the application of the final product, its performance or its interface with other products or finishes.






# Accessories for Wet rooms


## Wall accessories

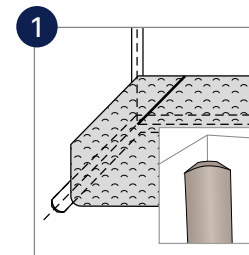

Profile for wall angle H204

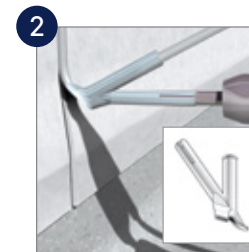

Wall welding rod CR40 0585

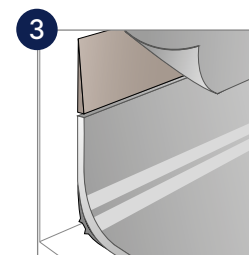


Diminishing profile - 0490

## Complementary product




Wall protection Decochoc (SPM)


## Floor accessories

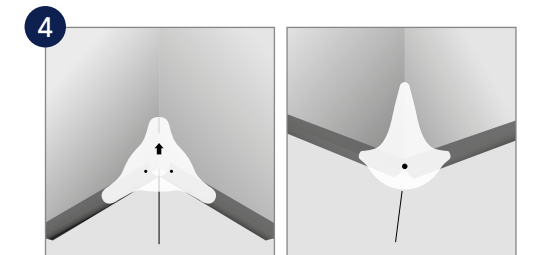

Clean Corner System IN 058S    Clean Corner System OUT 058R

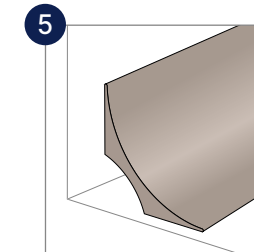

Profile for coving 4011

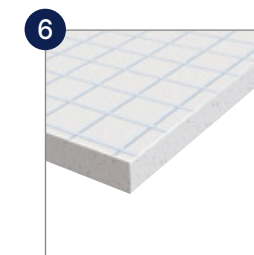


Tarafoam: acoustic insulation underlayer 997C





Rectangular drains    Round drains

Articles codes p.14














Shower threshold 0469

# Wall accessories

	Profile for wall angle	Diminishing profile wall/flooring
<b>Description</b>	 <p>PVC cove former to be placed in the internal angle of the wall before the installation of the vinyl <b>wall covering</b>.</p> <p>H204</p>	 <p><b>Diminishing profile</b> Floor/wall covering connection</p> <p>0490</p>
<b>Colors</b>	 0719	 6512
<b>Benefits</b>	<ul style="list-style-type: none"> <li>• Avoid the risk of piercing the wall covering</li> <li>• Its rounded shape makes it easier to clean the floor-wall junction and prevents accumulation of dirt or bacteria</li> <li>• Width : 12 mm</li> </ul> <p>Packaging 1 coil of 50 lm</p>	<ul style="list-style-type: none"> <li>• Makes it easier to link the floor and wall covering</li> <li>• Hygienic: avoid bacteria accumulation</li> <li>• Prevents the wall covering from tearing, improves durability and ensures watertightness</li> </ul> <p>Packaging 2 rolls of 25 lm</p> 
<b>Tips</b>	For installation, refer to the Gerflor installation guidelines	• Use an acrylic glue

## Decochoc wall protection

<b>Description</b>	 <p><b>DECOCHOC PROTECTION</b> Allows the protection of the wall behind wall-hung toilets</p> <p>For more information, reach out to SPM</p>	
<b>Benefits</b>	<ul style="list-style-type: none"> <li>• Prevents blistering of wall cladding where the toilet joins the wall</li> </ul>  <ol style="list-style-type: none"> <li>1 Gerflor wall covering</li> <li>2 Decochoc protection</li> <li>3 13cm skirting board</li> <li>4 floor covering</li> <li>5 Diminishing profile</li> <li>6 Sealant</li> </ol>	
<b>Tips</b>	• For the installation, refer to the AT and the Gerflor installation guidelines	

	Clean corner system in	Clean corner system out
<b>Description</b>	  <p>058S</p>	  <p>058R</p>
<b>Colors</b>	 0001	 0001
<b>Benefits</b>	 <p>196 × 176 mm Packaging: 1 box of 60 units</p>	 <ul style="list-style-type: none"> <li>• Watertightness</li> <li>• Maintenance and cleanability ease</li> <li>• Versatility</li> </ul> <p>110 × 108 mm Packaging: 1 box of 20 units</p>
<b>Tips</b>	• For installation, refer to the Gerflor installation guidelines	
	<b>Profile for coving</b>	<b>Tarafoam</b>
<b>Description</b>	 <p>PVC cove former</p> <p>4011</p>	 <p>The comfort version of the shower system</p> <p>997C 6792</p>
<b>Colors</b>	 6512	
<b>Benefits</b>	<ul style="list-style-type: none"> <li>• Allows the floor-wall cove to be formed</li> <li>• Its rounded shape makes it easier to clean the floor-wall junction</li> <li>• Limits the risk of piercing the floor covering</li> <li>• Prevents accumulation of dirt or bacteria</li> </ul>  <p>Packaging 30 units of 2 lm</p>	<ul style="list-style-type: none"> <li>• Allows the floor-wall cove to be formed</li> <li>• Its rounded shape makes it easier to clean the floor-wall junction</li> <li>• Limits the risk of piercing the floor covering</li> <li>• Prevents accumulation of dirt or bacteria</li> </ul> <p>Packaging 2 m x 20 lm roll</p>
<b>Tips</b>	• Use a miter shear for precise cutting	<ul style="list-style-type: none"> <li>• Acrylic bonding</li> <li>• Edge-to-edge installation</li> </ul>

# Floor accessories



Description	VERTICAL DRAIN DUSCHBRUNN 090A Ø 150 mm	HORIZONTAL DRAIN FREJA 090B Ø 150 mm	MINIMAX COMPACT DRAIN 090G Ø 130 mm	HORIZONTAL DESIGN DRAIN 600mm : 090J 900mm : 090K	HORIZONTAL COMPACT DESIGN DRAIN 600mm : 090L 900mm : 090M	VERTICAL DESIGN DRAIN 600mm : 090N 900mm : 090O
Water flow	0,8L/s	0,8L/s	0,8L/s	0,8L/s	0,6L/s	0,8L/s
Outlet's type	Vertical	Horizontal	Horizontal	Horizontal	Horizontal	Vertical
Dimensions						

## Drain accessories

Grates	The white PVC grate delivered with the drain can be replaced by the stainless steel one.			The design drain is delivered without a grate - it has to be purchased separately - 3 colors available		
Extension	090C	090C	X			
				<b>Inox:</b> 600 mm: 090P 900 mm: 090Q	<b>Inox:</b> 600 mm: 090P 900 mm: 090Q	<b>Inox:</b> 600 mm: 090P 900 mm: 090Q
				<b>Black:</b> 600 mm: 090R0001 900 mm: 090S0001	<b>Black:</b> 600 mm: 090R0001 900 mm: 090S0001	<b>Black:</b> 600 mm: 090R0001 900 mm: 090S0001
Knife for drain				<b>Gold:</b> 600 mm: 090R0002 900 mm: 090S0002	<b>Gold:</b> 600 mm: 090R0002 900 mm: 090S0002	<b>Gold:</b> 600 mm: 090R0002 900 mm: 090S0002
	090D	090D	X	X	X	X
Clamping ring	To easily cut a round hole in the vinyl flooring.					
	090E	090E	090F	X	X	X
Packaging	Spare part to be used if the original clamping ring breaks. It maintains the flooring in the drain.					
	090I	090I	090H	X	X	X
Drains and accessories for drains are sold by unit.						




Design drain / Rectangular drain



Standard drain / round drain

## SHOWER THRESHOLD

Description	 0469	<b>PVC shower threshold</b> Allows the connection between the PVC floorings of the shower and the chamber.
Colors		
Benefits	<ul style="list-style-type: none"> <li>Makes the junction between the floor covering and the shower covering</li> </ul>	
Tips	<ul style="list-style-type: none"> <li>Double-glued polychloroprene</li> </ul>	

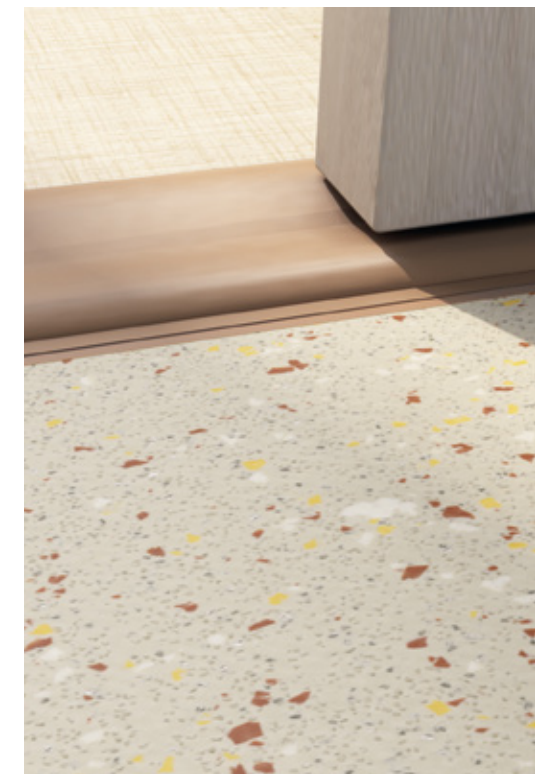


PVC shower threshold

# Find out more...



Visit the Gerflor website to find further information on our products:

- Product descriptions
- Technical datasheets and product construction details
- Maintenance and installation guidelines
- Marketing documents

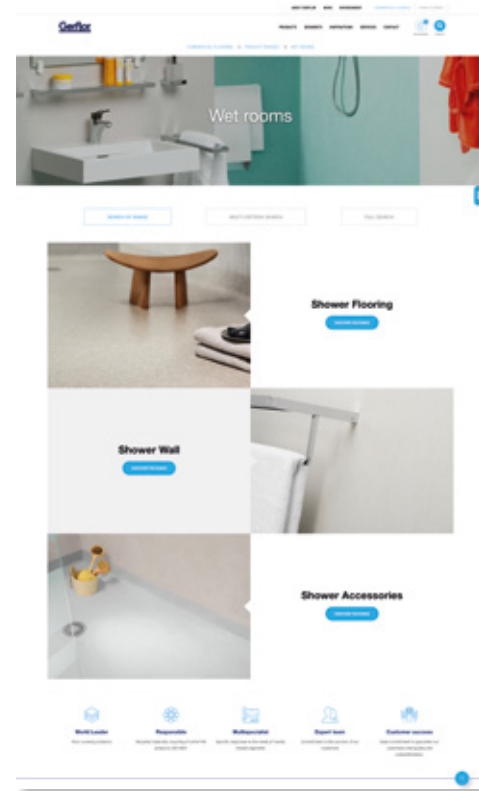

Play with our Floor & Wall finishes and simulate styles with our Interior Designer room visualisation software



You can find the comprehensive tutorial for installing floor & wall covering on our website and also on the Gerflor YouTube channel.



# Learn more about how to install our solutions!



Dedicated to both the vocational development of young people, as well as the ongoing training of professionals wishing to refine their fitting practices. The Gerflor Techno Centre aims to help and support your teams with a variety of training options, to develop and master the installation technique.








# Shower system eligible for the Second Life Programme

Tarasafe floorings and Mural Calypso wall covering ranges are compatible with Gerflor's Second Life programme that is available in selected countries.






# Shower System

			MURAL CALYPSO	TARASAFE STANDARD	TARASAFE ULTRA	TARASAFE DESIGN	TARASAFE ULTRA H <sub>2</sub> O	TARASAFE H <sub>2</sub> O
<b>DESCRIPTION</b>								
Total thickness	EN ISO 24346	mm	0.92	2.00	2.00	2.00	2.00 (on grainside)	2.00
Thickness of wearlayer	EN ISO 24340	mm	0.10	0.85	0.85	0.80	1.00	0.85
Weight	EN ISO 23997	g/m <sup>2</sup>	1610	2360	2360	2500	2400	2350
Width of sheet	EN ISO 24341	cm	200	200	200	200	200	200
Length of sheet	EN ISO 24341	ml	30	20	20	20	20	20
<b>CLASSIFICATION</b>								
Norm / Product specification	-	-	EN 259-1	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	-	34 - 43	34 - 43	34 - 43	34 - 43	34 - 43
Fire rating	EN 13 501-1	class	B-s2,d0	Bfl-s1	Bfl-s1	Bfl-s1	Cfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	-	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
Slip resistance: pendulum test (dry and wet)	EN 16165:2021 - Appendix C (BS 7976-2)	PTV	-	> 36	> 36	> 36	> 36	> 50
	AS4586 - A	class	-	P4	P4	-	P3	P5
Slip resistance: ramp test + oil - footwear	EN 16165:2021 - Appendix A (DIN 51 130)	class	-	R10	R10	R10	R11	R11
	AS4586 - D	class	-	R10	R10	-	R11	R11
Slip resistance: ramp test + water - barefoot	EN 16165:2021 - Appendix A (DIN 51097)	class	-	B	B	B	C	B
	AS4586 - C	class	-	-	-	-	C	B
Slip resistance - footwear and barefoot + water	EN 13845-annexe C	class	-	ESf-ESb	ESf-ESb	ESf-ESb	ESb	ESf-ESb
Water tightness in special wet area	EN 13553	-	-	OK	OK	On going	OK	On going
Surface roughness	-	µm	-	Rz ≥ 20	Rz ≥ 20	Rz ≥ 20	Rz ≥ 20	Rz ≥ 20
Slip resistance wet areas	Resbaladicidad CTE	class	-	-	-	-	3	3
<b>PERFORMANCE</b>								
Type Binder content	EN ISO 10582	type	-	I	I	I	I	I
Dimensional stability	EN ISO 23999	%	-	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (exigency)	EN ISO 24343-1	mm	-	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Castor chair test (type W)	ISO 4918	-	-	OK	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	-	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN ISO 105 - B02	degré	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	-	SparClean®	SparClean®	SparClean®	-	SparClean®
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK	OK
Anti-bacterial activity (MRSA) (1)	ISO 22196	-	> 99% inhibits growth*	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
<b>ENVIRONNEMENT / QUALITÉ DE L'AIR</b>								
TVOC after 28 days	ISO 16000-6	micrograms/m <sup>3</sup>	< 100	< 100	< 100	< 100	< 100	< 100
Certification	-	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®	Floorscore®
<b>CE MARKING</b>								
	EN 14041	-	-				-	-
	-	-	-				-	-
	EN 15102	OK	-	-	-	-	-	-

RC Lyon B 726 580 152 - ije - 06/2024

\*Anti-bacterial activity (E. coli - S. aureus - MRSA) (1)

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

**IMPORTANT:** The information contained in this document is valid from 01/06/2024 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

## we care / we act Our Commitments for a Sustainable future

  
**CARBON FOOTPRINT\***  
-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup> between 2020 and 2025

  
**BIOSOURCED CONTENT\*\***  
10 % by 2025

  
**RECYCLED CONTENT**  
30 % by 2025

  
**ADHESIVE FREE\*\*\***  
35 % by 2025

  
**ANNUAL VOLUME RECYCLED**  
60 000 t by 2025

**Gerflor**®

\* Scopes 1 and 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity - adhesive free solution