



ESPECIAS


VINAG
Y ACE

STONE 55



SUSTAINABILITY
AT GERFLOR



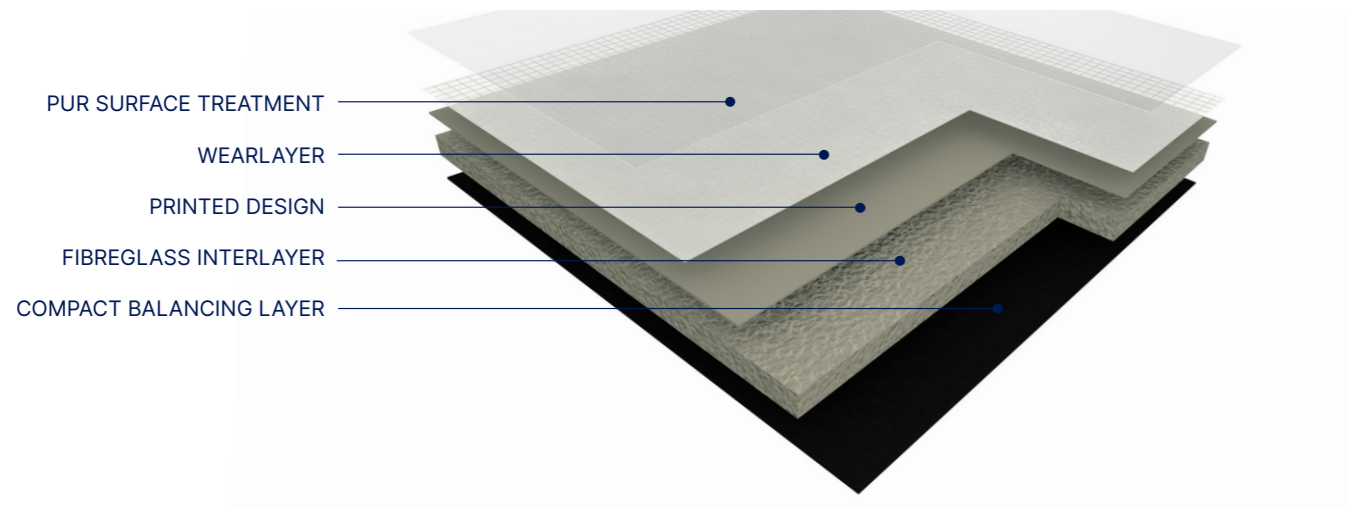

Virtuo Stone 55 tiles are ideal for permanent, glued installation to prevent any expansion or contraction in areas where temperature fluctuations are frequent. Some regions of Australia can face scorching heat and freezing cold. Factors such as underfloor heating, direct sunlight exposure and variations in maximum and minimum temperatures all affect whether a loose lay or glued system is more appropriate for your needs.



* Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure or for compensation for any other loss or damage. You are also entitled to have the goods repaired if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

For more details call 1800 060 785 or visit gerflor.au




VIEW IMAGES OF THE VIRTUO RANGE



STONE 55




2421 Curton Charcoal

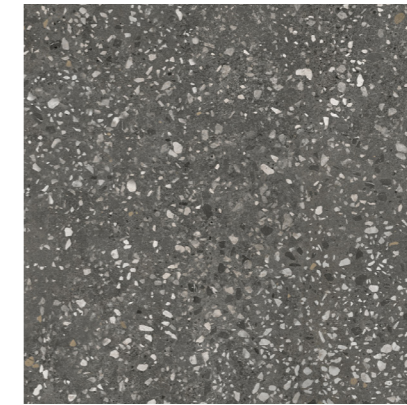

2422 Granito Grey




2423 Concrete Grey

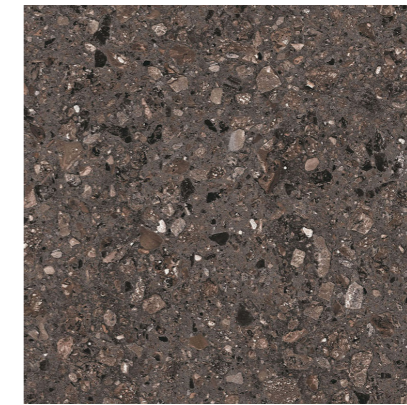

2424 Aquitaine Bister




2425 Curton Stone

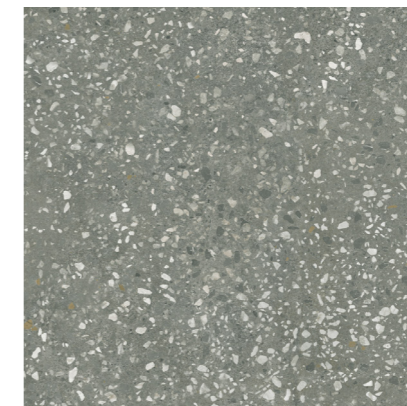

2426 Granito Smoke



2427 Aquitaine Pearl

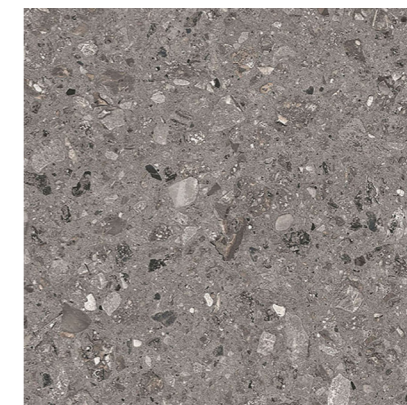

2428 Aquitaine Ash




STONE 55



CURTON CHARCOAL
2421



STONE 55

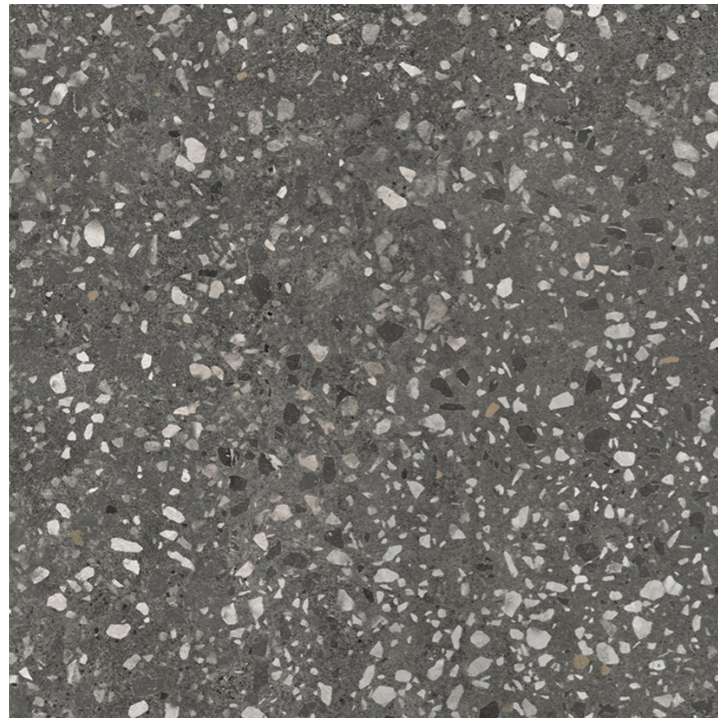

GRANITO GREY
2422



STONE 55




CONCRETE GREY
2423



AMERICANO 0
CAPPUCCINO
ESPRESSO
LATTE
FLAT LATTE
MACCHIATO
MOCHA

WASSER LAUT 0.3
APFELSCHORLE 0.3
LEMONADE 0.3
CHARITEA 0.3
COLA 0.25
F. COLA 0.25
PAN 0.3

STONE 55

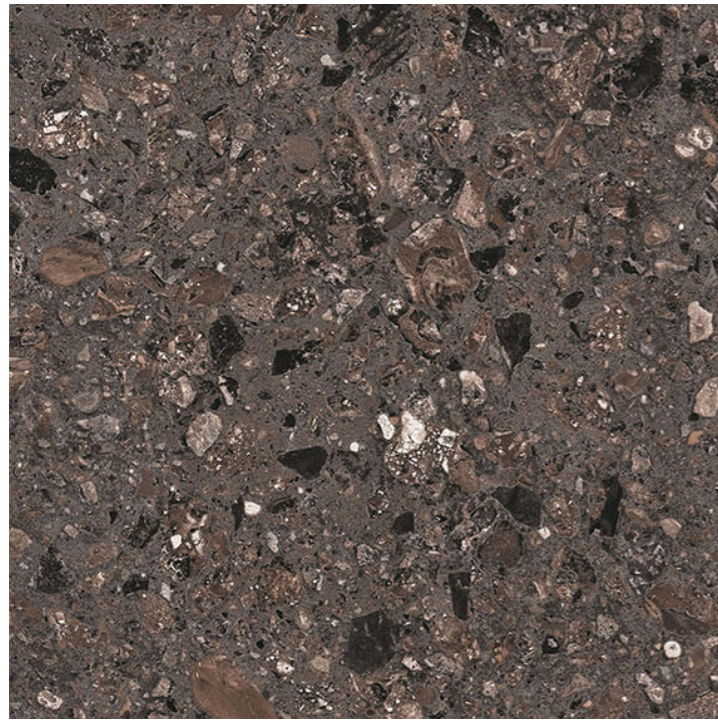

AQUITAINE BISTER
2424




STONE 55



CURTON STONE
2425




STONE 55

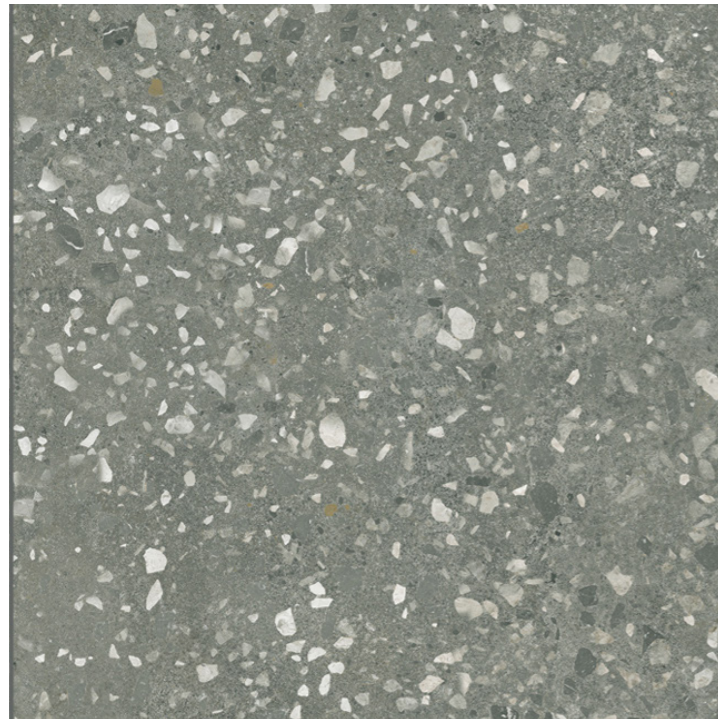

GRANITO SMOKE
2426




STONE 55

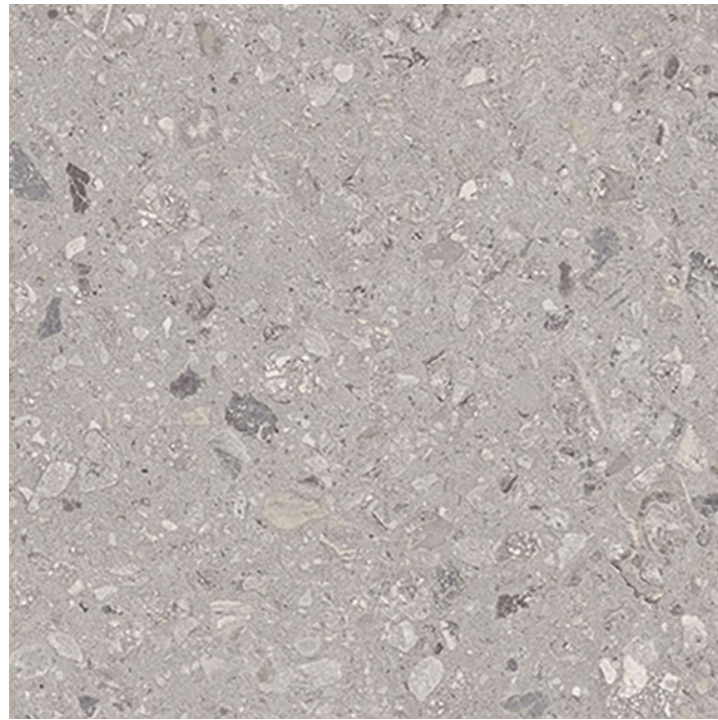

AQUITAINE PEARL
2427



STONE 55

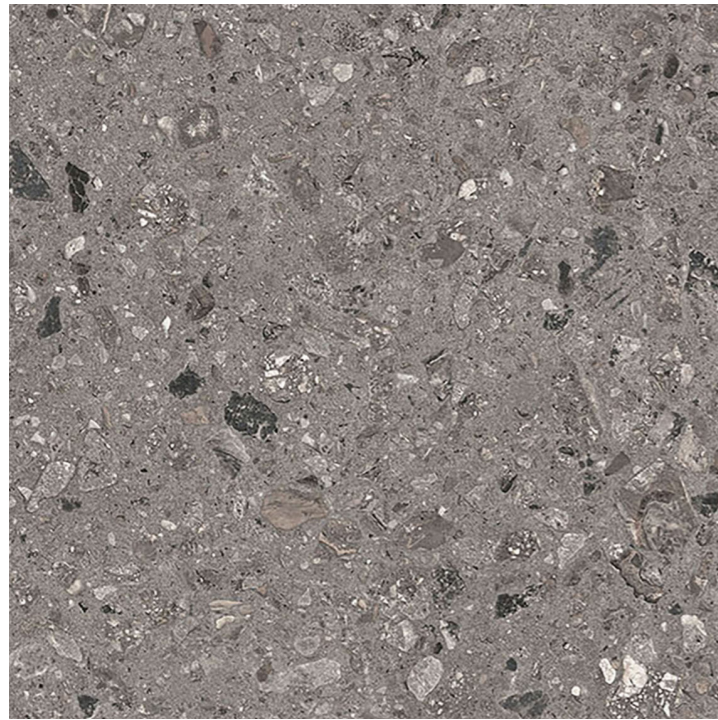

AQUITAINE ASH
2428



| VIRTUO STONE 55 LVT SPECIFICATIONS | STANDARD | UNIT OF MEASURE | |
|------------------------------------|---------------|------------------|---------------|
| THICKNESS | ISO 24346 | mm | 2.5 |
| WEAR LAYER THICKNESS | ISO 24340 | mm | 0.55 |
| DIMENSIONS | ISO 24342 | mm | 610 × 610 |
| AREA PER BOX | | m ² | 3.55 |
| TILES PER BOX | | qty | 9 |
| SLIP RESISTANCE | AS 4586 | class | R10 |
| | AS 4586:2013 | class | P3 |
| FIRE RATING | AS ISO 9239-1 | kW / m | 29.0 |
| | | smoke% / min | 126 |
| VOLATILE ORGANIC COMPOUNDS [VOC] | ASTM D5116 | mg/m3/hr (24hrs) | Extremely low |



VIEW IMAGES
OF THE VIRTUO
RANGE

gerflor.au | 1800 060 785

