




GTI MAX

Interlocking Technical Tile

Gerflor[®]




GTI MAX CONNECT / GTI PURE CONNECT

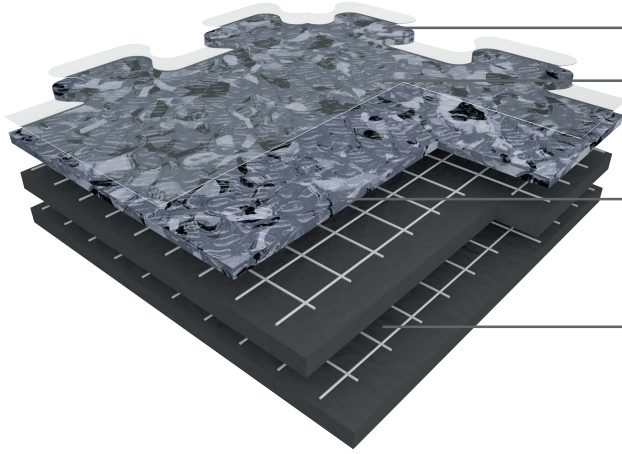

- Dovetail Assembly – No Heat Welding
- PUR+ Patented Surface Treatment for Easy Maintenance
- 2mm Wear Layer – Maximum Durability
- Double Reinforced Fiberglass for Dimensional Stability




GTI MAX CLEANTECH

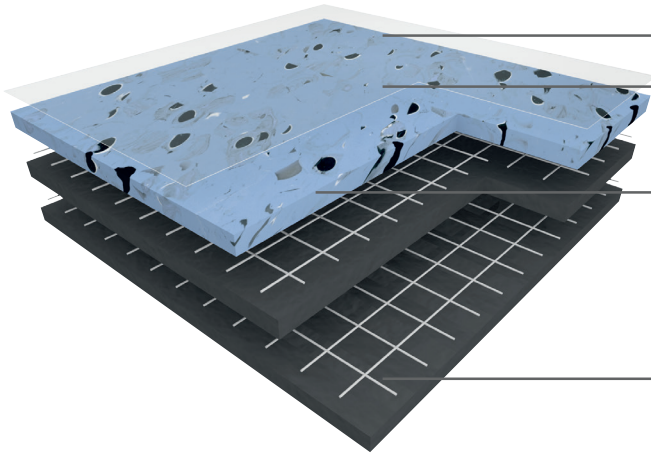

- Square Edge for Heat Welding 100% Watertight Solutions
- PUR+ Patented Surface Treatment for Easy Maintenance
- 2mm Wear Layer – Maximum Durability
- Double Reinforced Fiberglass for Dimensional Stability



Product Benefits

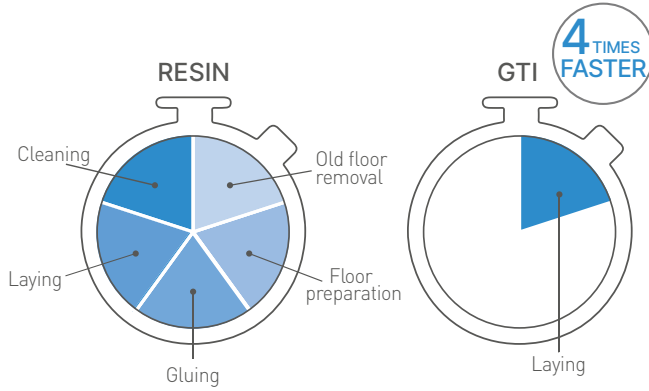

Less Disruption/ Faster Installation

- Fast installation allowing the area to remain open
- Clean installation - no dust
- A two-person team can cover 2,000sf in 8 hours

Heavy Traffic Resistance


- Double-reinforced fiberglass for enhanced stability
- Highly resistant to static loads

High Traffic Durability


- Tiles triple pressed at over 3,000T
- 2mm wear layer
- PUR+ surface treatment enabling easy maintenance



Cleantech vs Connect

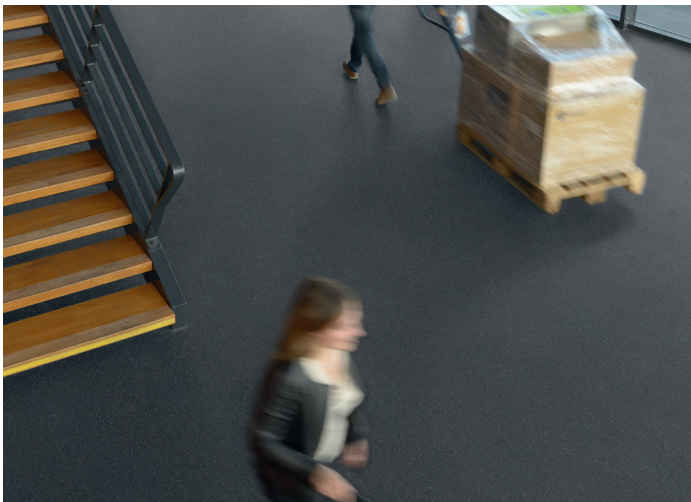

	CLEANTECH	CONNECT
	MAX	MAX/PURE
>> Mechanical Resistance	100%	100%
>> Resistance to Chemicals	75%	50%
>> Installation	100%	100%
>> Zoning & Aesthetics	100%	100%
>> Comfort & Safety	100%	100%
>> ESD Control	75%	50%
>> Cleanroom Suitability	75%	-
>> Watertightness	100%	50%




GTIMAX


Innovative interlocking design creates a strong durable surface with no need for heat welding.

Renovation Solution:
Can be installed over existing floors.

VCT - Asbestos Tiles

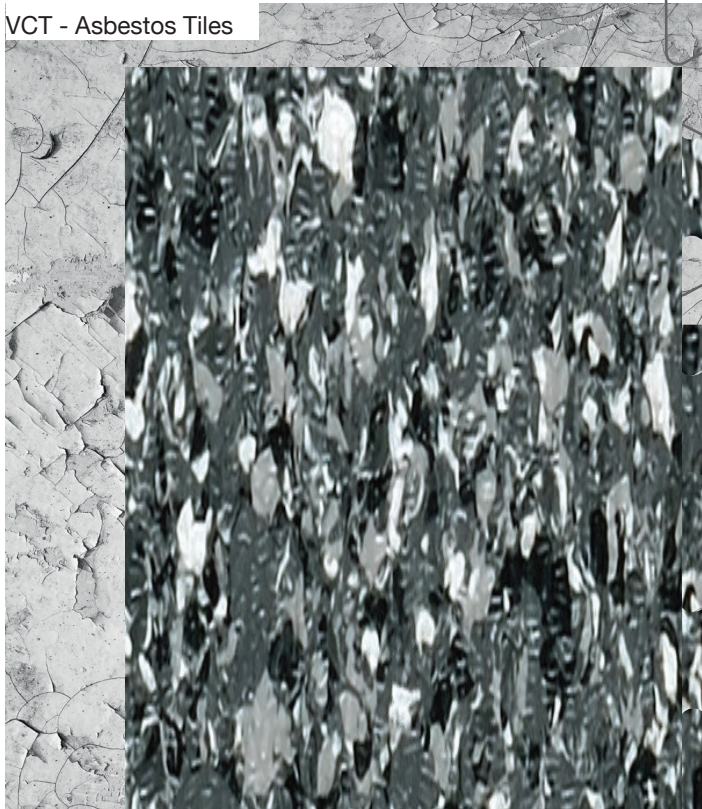

Epoxy

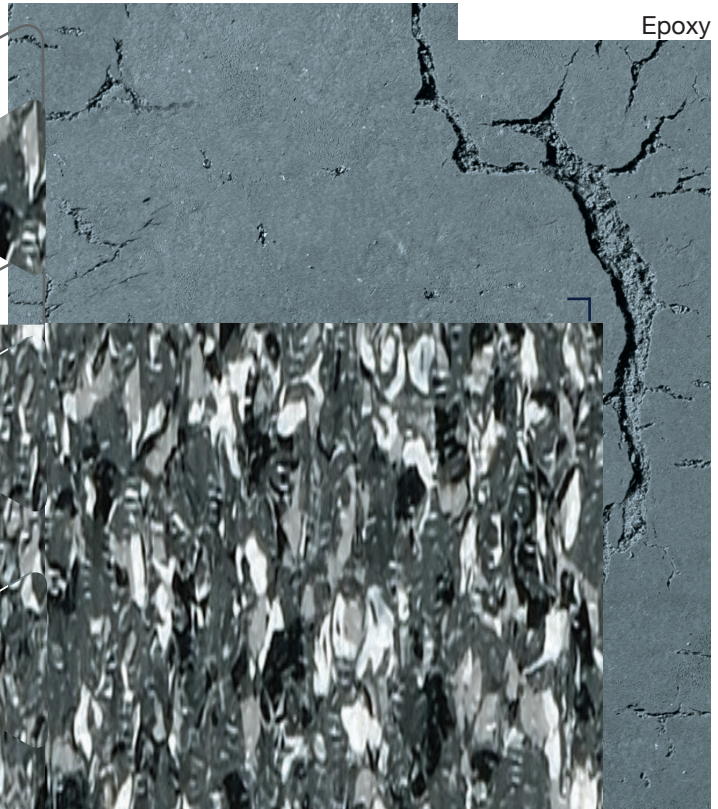


Ceramic Tile

Vinyl Flooring


Sampled 0249 - Carbon




GTI PURE CONNECT

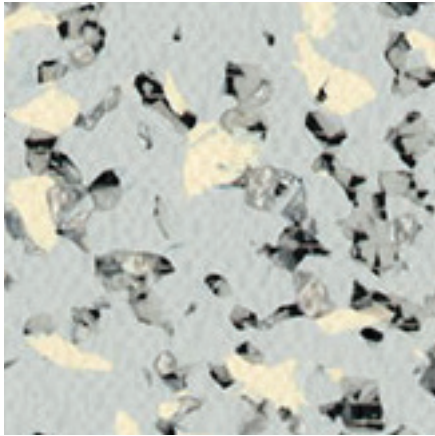


2745 Plaza

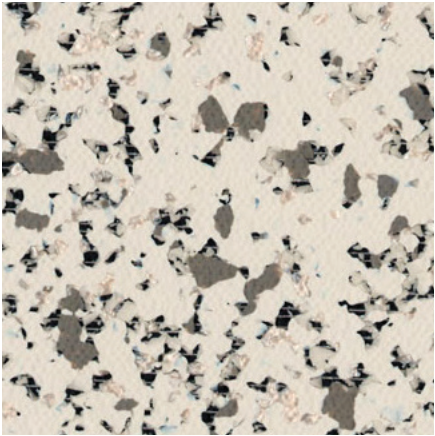


2743 Central Park

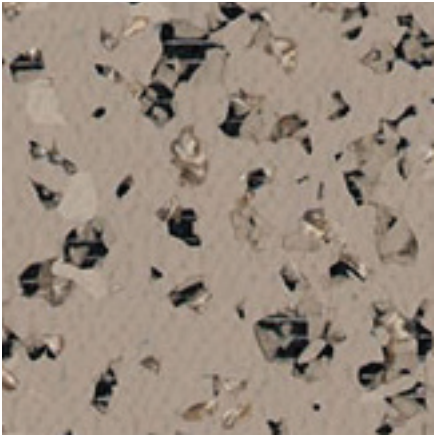


2744 Queens Soft

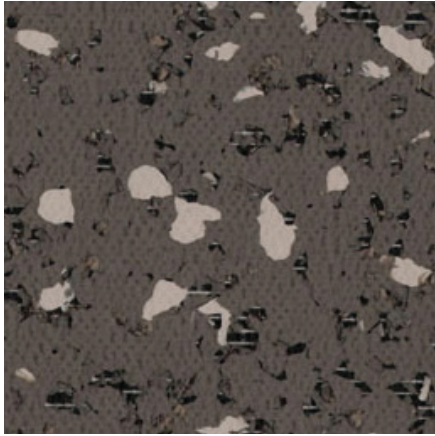

27842 Times Square

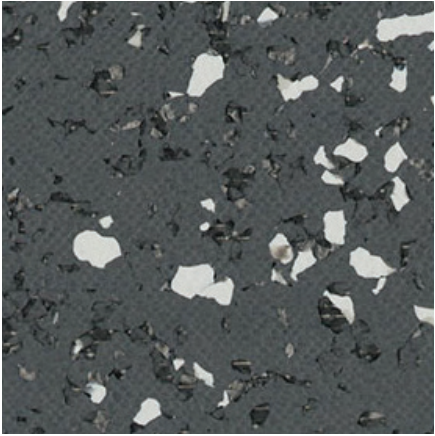


2741 Brooklyn

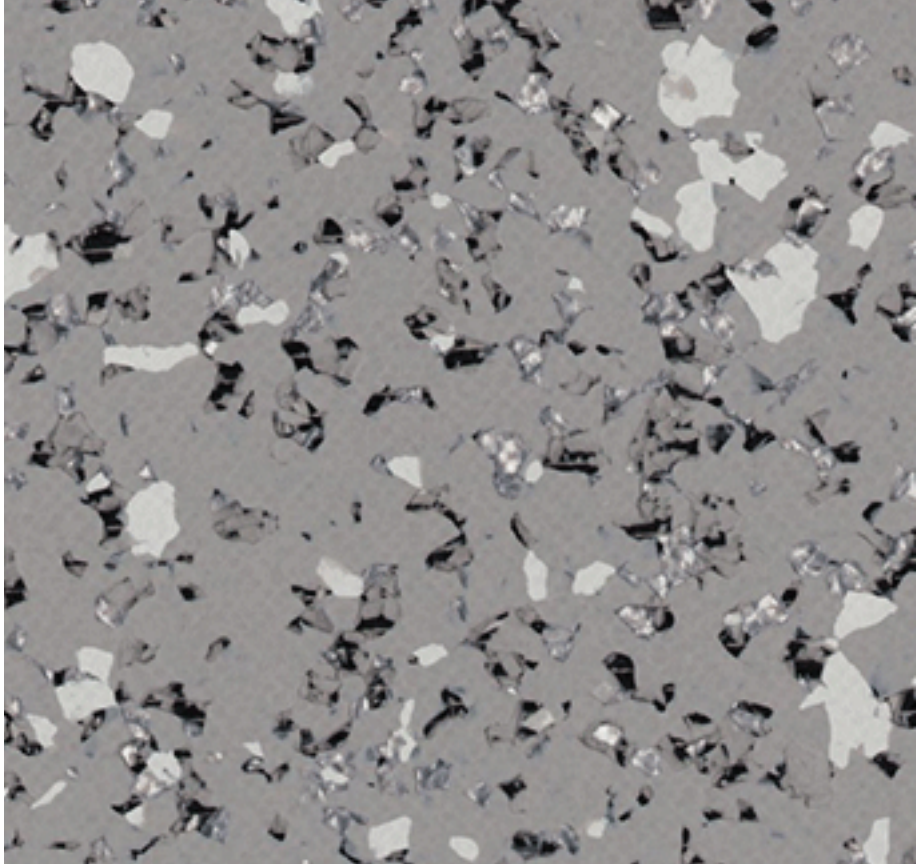


2740 Harlem Soft (GTI Pure Connect Sampled in Soft Emboss)


GTI MAX CONNECT / GTI MAX CLEANTECH

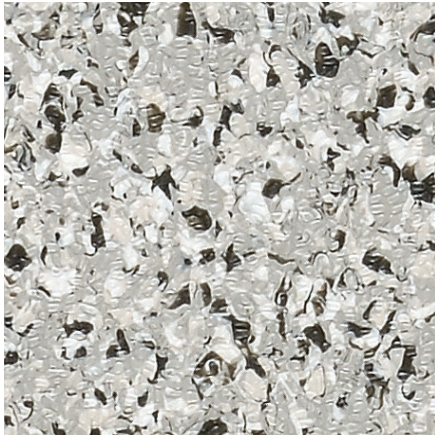


0265 Maestrale*

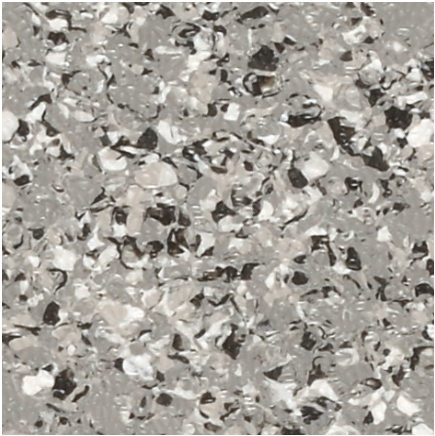


0264 Ponente*

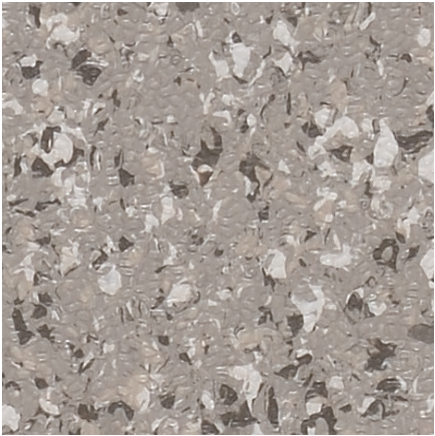


0267 Levante*

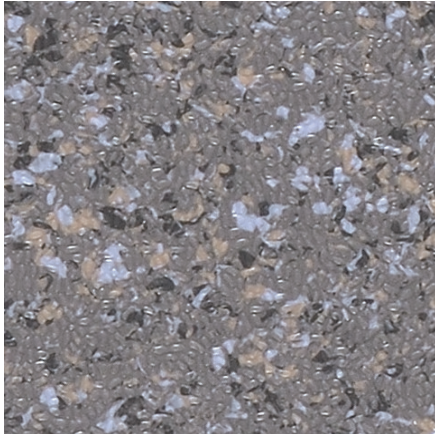


0247 Magma*

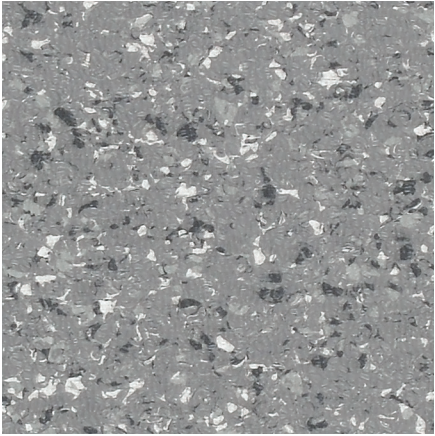

0266 Peler*

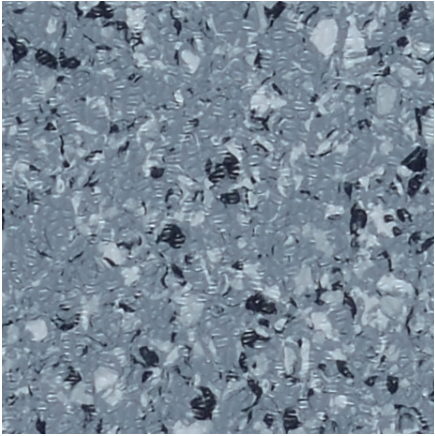

0252 Titanium*

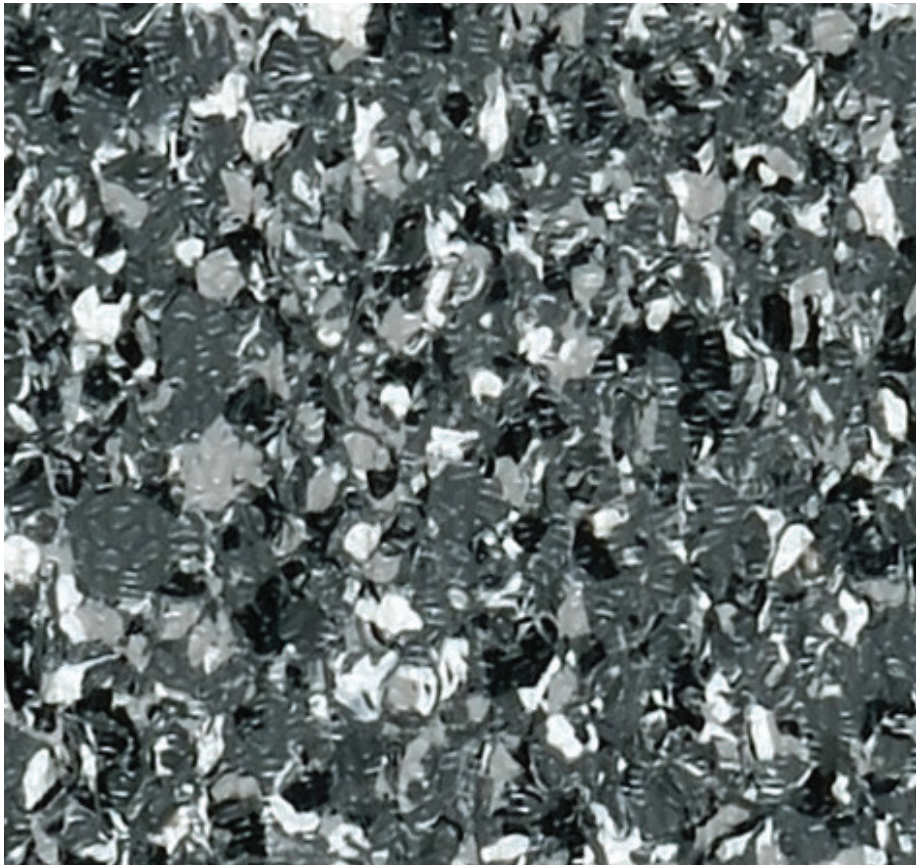


0249 Carbon*




*Available in Rice & Soft Emboss
Rice Emboss Sampled


GTI MAX CONNECT / GTI MAX CLEANTECH

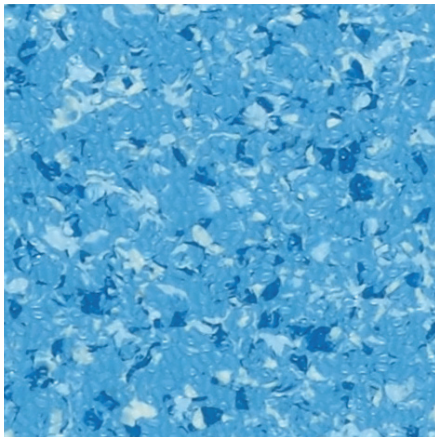


0255 Saphir

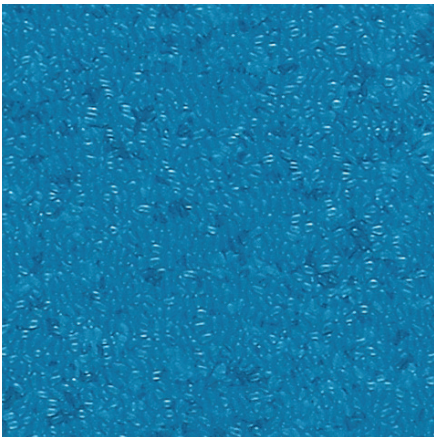


0230 Blue

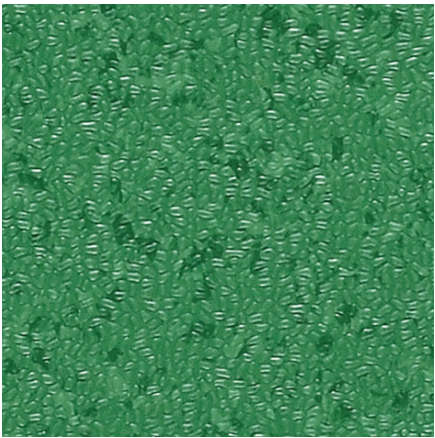

0233 Green

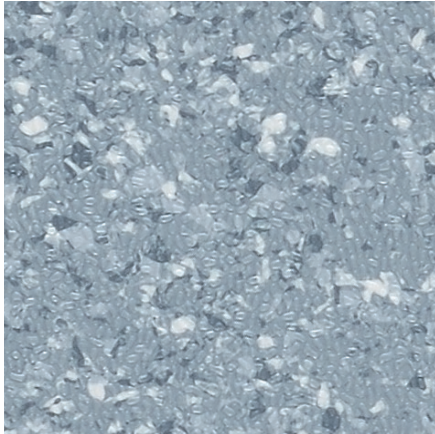


0253 Aluminium

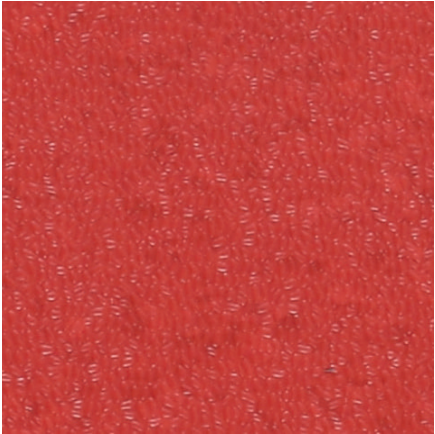


0232 Red



0231 Yellow

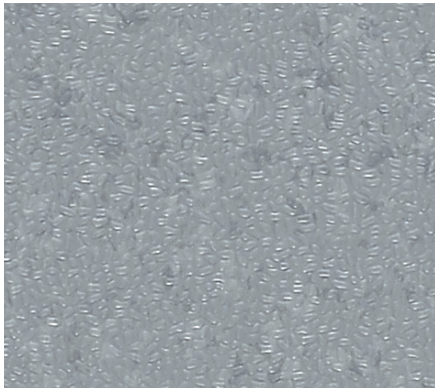

0234 Clear Grey

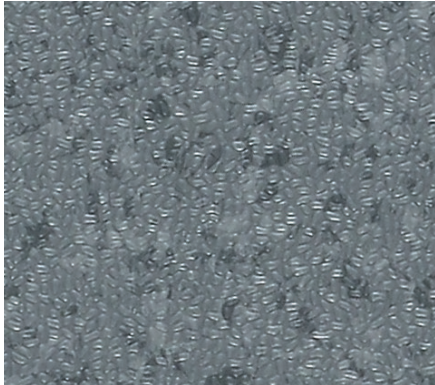

0235 Dark Grey



0236 Black



GERFLOR USA
 877-437-3567
 samples@gerflorusa.com
 gerflorusa.com



GENA0139

DESCRIPTION	STANDARDS	REQUIREMENTS	GTI MAX CONNECT	GTI MAX CLEANTECH	GTI PURE CONNECT
PRODUCT DESCRIPTION					
Reference Specification*	ASTM F1700	-	Meets Performance Requirements		
Construction	-	-	Interlocking Technical Tile with Rice Emboss	Technical Tile with Rice Emboss	Interlocking Technical Tile with Soft Emboss
Surface Treatment / Maintenance	-	-	PUR+		
Gauge Total Thickness	ASTM F386	> 0.075"	0.24" (6.0 mm)		
Tile Size	-	-	With Dove Tails: 25" x 25" (635mm x 635mm)	Without Dove Tails: 23.6" x 23.6" (600mm x 600mm)	With Dove Tails: 25" x 25" (635mm x 635mm)
PERFORMANCE					
Static Load Resistance	ASTM F970	≤ 0.005"	Meets Requirements		
Abrasion	ASTM F510	-	Meets Requirements		
Rolling Load Test	ASTM F2753	-	Meets Requirements		
Chemical & Stain Resistance	ASTM F925	-	Meets Requirements		
Coefficient of Friction	ASTM D2047	ΔE ≤ 8	Meets Requirements		
Indentation - Hardness	ASTM D2240	-	95		
Smoke Density (Flaming and Non-Flaming)	ASTM E662	-	Meets Requirements		
Fire Rating - Flame Spread	ASTM E648	Class 1	Meets Requirements		
ENVIRONMENT HEALTH & SAFETY					
Bacterio-Static**	ISO 22196	-	Inhibits spread of infections at 99%		
Viro-Static**	ISO 21702	-	Inhibits growth of virus of 99.7% after 2 hours		
Manufacturing Plant Certifications	ISO 9001	-	Quality, Environment, Health & Safety, Energy		
Environmental Product Declaration (EPD)	LEED v4 M+R	-	Product-Specific Type III		
Material Ingredients: Health Product Declaration (HPD)	LEED v4 M+R	-	Self Declared		
No Harmful Chemicals	European Chemical Agency (ECHA)	-	100% REACH Compliant		
Sourcing of Raw Material: Recycled Content	Average Pre-Consumer Content	-	57%		
Indoor Air Quality	California Standard 01350	-	FloorScore® Certified		
Production Waste	In-Plant Recycling	-	100% Manufacturing Waste Recycled		
TVOC after 28 days	ISO 160000-6	-	≤10μ/m ³		
Embodied Carbon	kg/CO ² /m ²	-	19.1 kg CO ² /m ²		
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on gerflorusa.com				

* Rubber leaves indelible stains on synthetic floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

** The best defense against the spread of infections is the implementation of an effective cleaning method.

For the most updated documentation and specification content, please visit gerflorusa.com

GTI MAX USA Binder - 2024

