
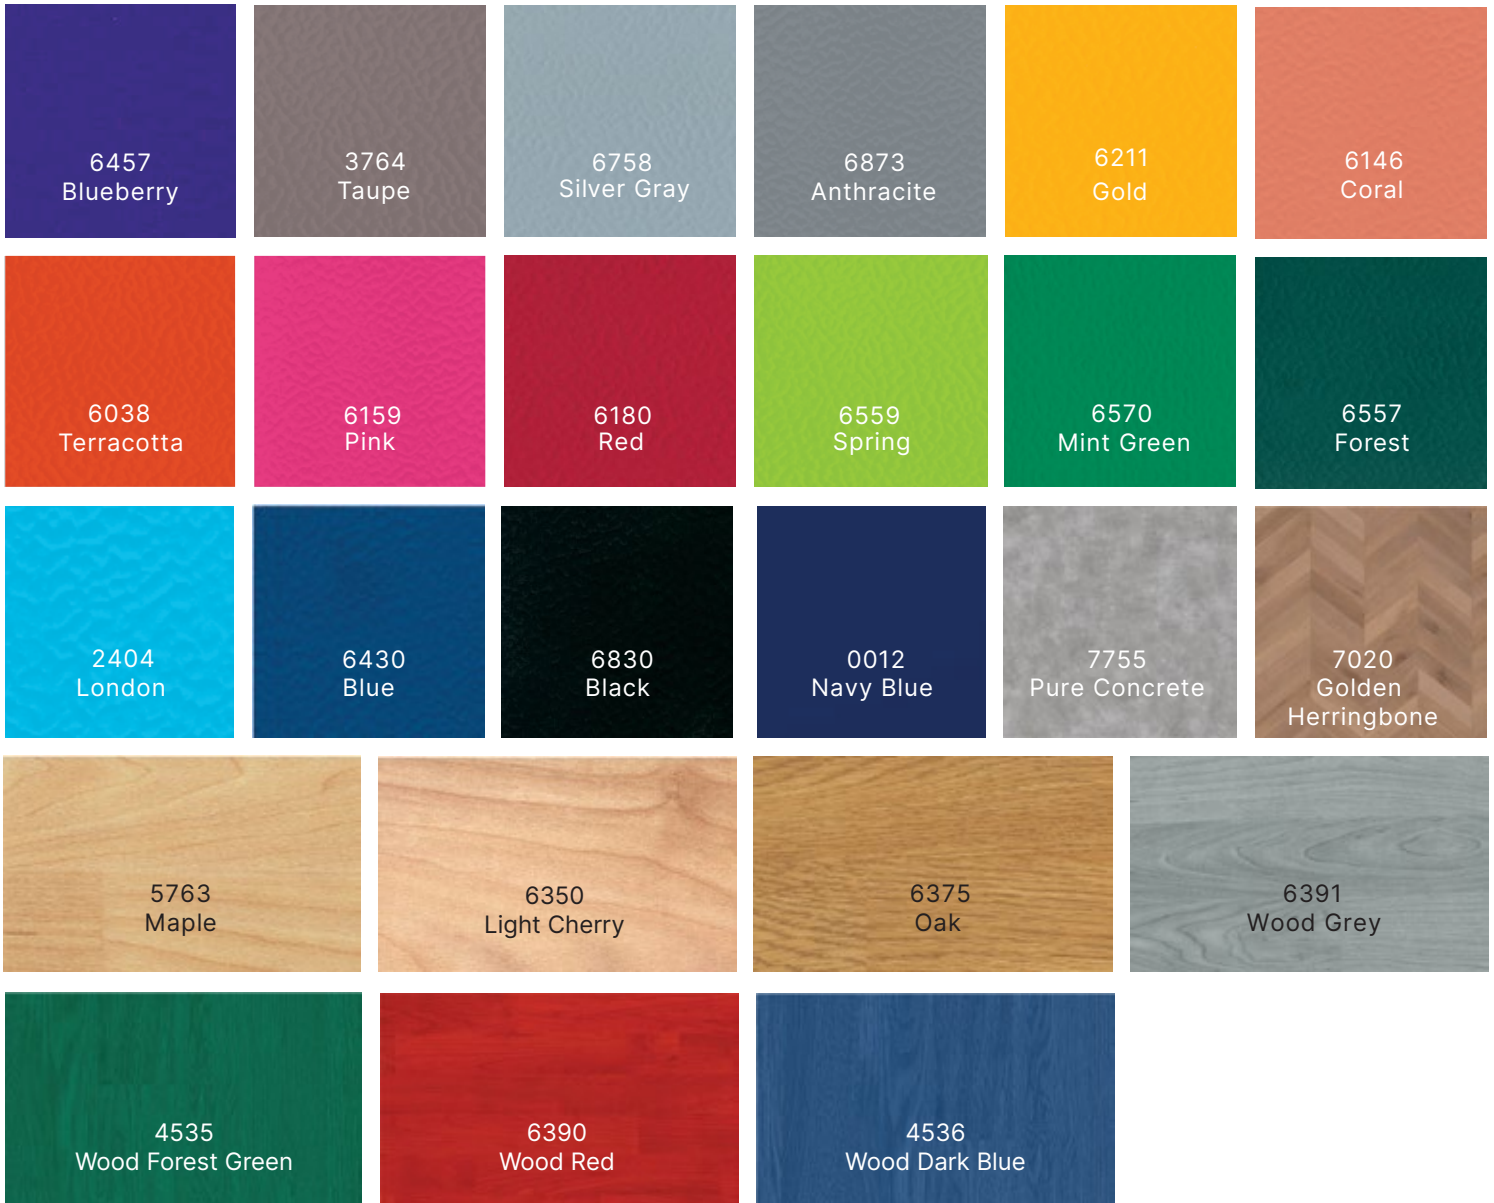


## TARAFLEX® SPORT M PLUS DRY-TEX

No. 1 SOLUTION FOR SPORT AND MULTIPURPOSE USE

Taraflex® Sport M Plus Dry-TEX provides excellent levels of comfort and safety suited to all types of sports combined with some multipurpose activities.

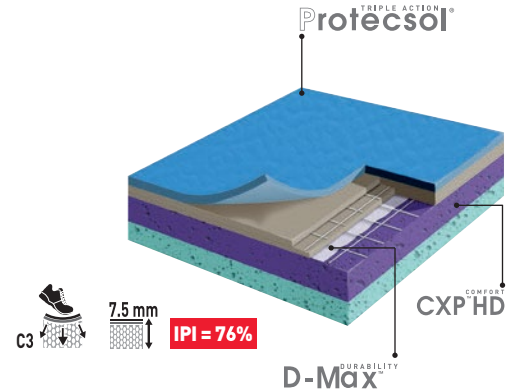

- ▶ ASTM F2772 Class 3
- ▶ Superior Indentation Resistance: Improved shock absorption without sacrificing indentation resistance
- ▶ Absorption ball bounce:  $\geq 96\%$
- ▶ Impact Protection Index (IPI): 76%
- ▶ Dual density foam
- ▶ No-wax for life — ease of maintenance
- ▶ Highest moisture tolerance: 100% RH (25 lb)
- ▶ Up to 70% cost savings compared to third party mitigation systems
- ▶ Full-spread adhesive installation method: no risk of mold



# TARAFLEX® SPORT M PLUS

COMFORT CXP HD DURABILITY D-Max™ TRIPLE ACTION® ProtecSol

No. 1 SOLUTION FOR SPORT AND MULTIPURPOSE

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
<b>PRODUCT DESCRIPTION</b>				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	D-Max™	
Foam Backing	-	-	Double Density CXP HD	
Total Thickness	-	-	0.30" (7.5 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	0.95 lb/ft <sup>2</sup> (4.6 kg/m <sup>2</sup> )	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86' 6" (26.4 m)	67' 3" (20.5 m)
<b>SPORT PROPERTIES</b>				
Sport Properties	ASTM F2772	Class 1	Class 3	
Safety	ASTM F2772	≥10%	≥34% - <39%	
Vertical Deformation	ASTM F2772	≤ 0.138" ( ≤ 3.5 mm)	≤ 0.078" ( ≤ 2 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	73%	
Anti-Friction Burns	-	-	ProtecSol™	
<b>TECHNICAL CHARACTERISTICS</b>				
Chemical Product Resistance	ASTM D543	-	Meets Requirements	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
<b>ENVIRONMENT HEALTH &amp; SAFETY</b>				
Ease of Maintenance	-	-	ProtecSol™ / No-wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	100% REACH Compliant	
Naturally Bacteriostatic	ISO 22196	-	Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	FloorScore®	
Recycled Content	MRc3 LEED v4	-	30%	
<b>INSTALLATION METHOD</b>				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 95% RH ( ≤ 10 lb)		
Moisture Mitigation System	ASTM F2170 (F1869)	≤ 92% RH ( ≤ 10 lb)	ISOLSPORT	
Gerflor Dry-Tex System	ASTM F2170 (F1869)	100% RH ( ≤ 25 lb)		
<b>WARRANTY</b>	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			