

UK Manufactured


# **Gerflor Industrial Tile**

.



## **Industrial Tile colours**







9003 White



3016 Maroon



3020 Red






## 7045 Light Grey



5005 Blue




1002 Beige



### 7015 Dark Grey



9004 Black



1018 Yellow

6005 Green

# **Gerflor Industrial Tile**

designed for durability and fast installation




### Performance

- Withstand Mechanical traffic
- 10 colours available in 5 mm, 7 mm, 9 mm: for versatile applications



### **Easy Installation**

- Adhesive Free Interlocking system: Easy to remove and reuse
- Minimal subfloor preparation: easy to install

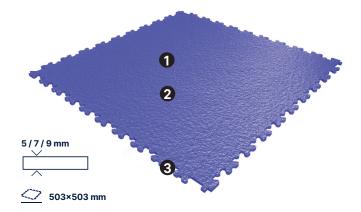

- 1. Textured emboss: anti slip properties
- 2. Made from hard-wearing material available in various thickness
- 3. Dovetail interlocking system



### **UK Manufactured**

Safety & Well being

• R10 Slip resistance

· Walking comfort

 Manufactured in the UK utilising top quality materials to guarantee performance

## we care / we act



### **Recycling** 100% recyclable Up to 80% recycled content

 $\mathfrak{P}$ 

Indoor Air Quality TVOC < 100 micrograms / m<sup>3</sup> No Formaldehyde



## Reach

100% REACH compliant Phthalate Free (except recycled content) FREE of heavy metals FREE of solvent



## **Renovation solution**

## across various commercial & industrial applications

#### 5mm – Moderate Industrial

Light weight product assembly lines, food processing, textiles manufacturing, light weight warehousing (eg using pallet trucks), vehicles and machinery workshops/garages, light manufacturing (eg furniture, glassware, bicycle manufacturing), household and personal care manufacturing and storage units.

#### 7mm – General Industrial


Plastic manufacturers, warehousing (eg using forklift trucks), vehicle manufacturing/assemble lines and defence.

#### 9mm – Heavy Industrial

Paper mills, metal working, metal production, modular manufacturing, heavy warehousing (large forklift trucks), chemical production, machine tool building and shipbuilding.



**5mm - Moderate Industrial** 




7mm - General Industrial



9mm - Heavy Industrial

## Do not forget the finishes!



Access & corner All colour for all thicknesses are available



**Anti Bounce Mallet** 5951



Entrance mat Esplanade 9000






5005 Blue



9003 White / 7045 Light Grey

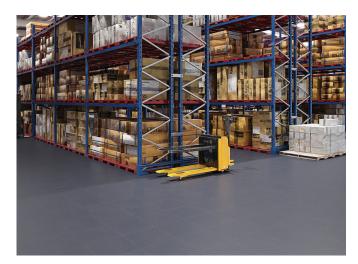

7015 Dark Grey

9003 White



7045 Light Grey / 9004 Black / 1018 Yellow

# **Industrial Tile**

				Industrial Tile		
Description			Moderate Industrial	General Industrial	Heavy Industrial	
Total Thickness	EN ISO 24346	mm	5	7	9	
Thickness of the wearlayer	EN ISO 24340	mm		-		
Weight	EN ISO 23997	g/m²	7000	9200	12800	
Size	EN ISO 24342	mm		503 × 503		
Number of planks per box / sqm per box	-	-	10 / 2.53 sqm	8 / 2.02 sqm	6 / 1.52 sqm	
Classification						
Norm/Product Specification	-	-		EN ISO 10581		
European Classification	EN ISO 10874	Class		34-43		
Fire Rating	EN 13501-1	Class		BfI-s1		
Static Electrical Propensity	EN 1815	kV		< 2		
Slip Resistance Wet	EN 16165 app.B (DIN 51 130)	Class		R10		
Performances						
Wear Resistance	EN 660.2	mm <sup>3</sup>		≤ 2.0		
Type Binder content	ISO 10581	group		I		
Curling	EN ISO 23999	mm		≤ 1		
Dimensional stability (norm)	EN ISO 23999	%		≤ 0.25		
Residual Indentation	EN ISO 24343-1	mm		≤ 0.10		
Castor chair test	ISO 4918	-		OK		
Flexibility	ISO 24344 method A	-		No cracking		
Shore hardness	EN ISO 868	H⊳		≥ 40		
Thermal Conductivity	EN ISO 10456	W/(m.k)		0.25		
Colour Fastness	EN ISO 105-B02	degree		≥ 6		
Chemical Products Resistance	EN ISO 26987	-		ОК		
Environment/Indoor Air Quality						
TVOC after 28 days	ISO 16000-6 r	micrograms/m <sup>3</sup>		<100		
CE Marking						
			(7) (%) ( <b>**</b> ) (2)			

()

EN 14041





The information contained in this document is valid from 01/09/2024 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force. Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

## We care / We act Our Commitments for a Sustainable future



-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup>

between 2020 and 2025





ADHESIVE FREE 35 % by 2025





\* Scopes 1 and 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity - adhesive free solution