



ADVENTURER

Gerflor[®]
theflooringgroup



ADVENTURER

The Adventurer range combines outstanding performance with attractive styling. Available in 12 colours, Adventurer is suitable for a wide range of environments including commercial, education and healthcare.

CONTENTS


Colourways.....	1
Art Gallery Scheme	2
Floor Plan	4
Education Scheme	6
Floor Plan	8
Commercial Office Scheme	10
Floor Plan	12

ADVENTURER


Colourways




Sandstorm 25017
LRV 13.98




Lunar Gray 25003
LRV 9.82




Aquarelle 25011
LRV 10.94



Cliff Shadow 25006
LRV 10.81




Blue Mountain 25008
LRV 9.70




Gulf Stream 25009
LRV 10.50




Nile Brown 25007
LRV 9.03




Kalahari 25013
LRV 9.28




Oregon Forest 25010
LRV 7.87



Red Sands 25015
LRV 8.80



Lost Horizon 25016
LRV 7.42



Seafarer 25012
LRV 10.67



Broadloom




Quarter Turn






ART GALLERY FLOOR PLAN

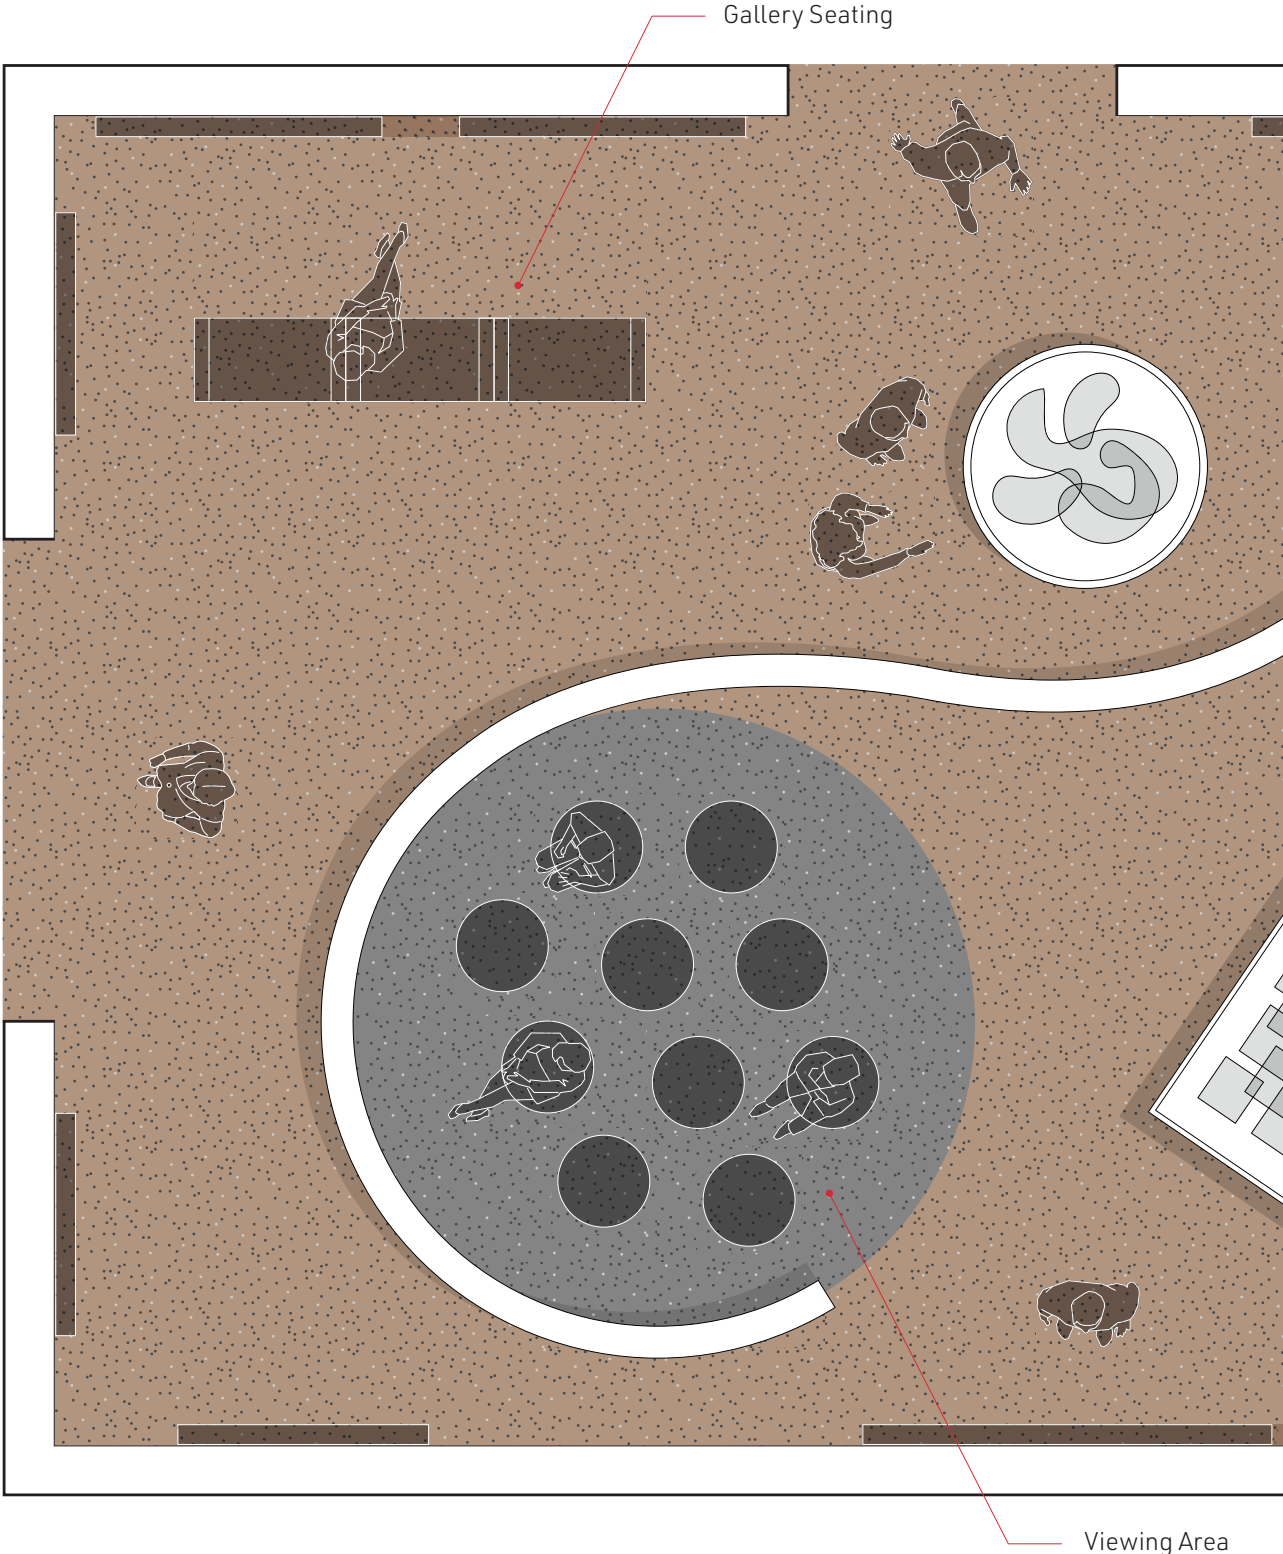

Corridor

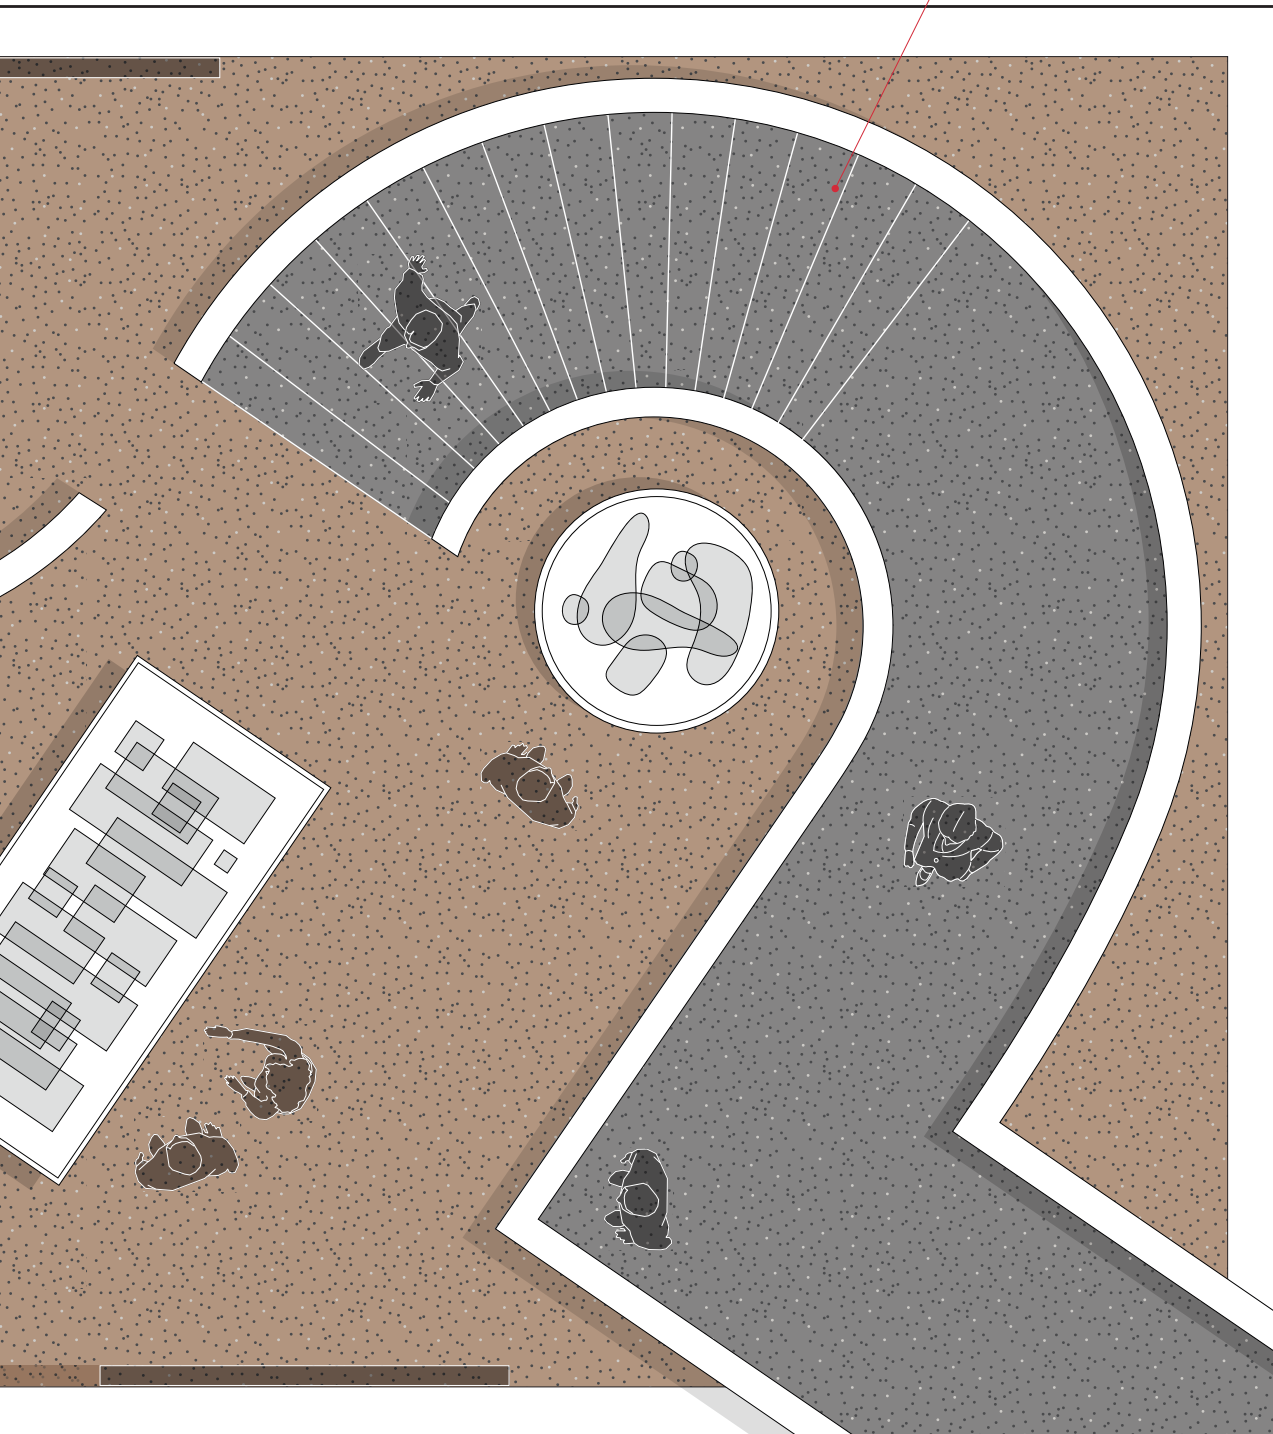

Adventurer
Sandstorm 25017




Adventurer
Lunar Gray 25003






EDUCATION FLOOR PLAN


Quiet Area / Library

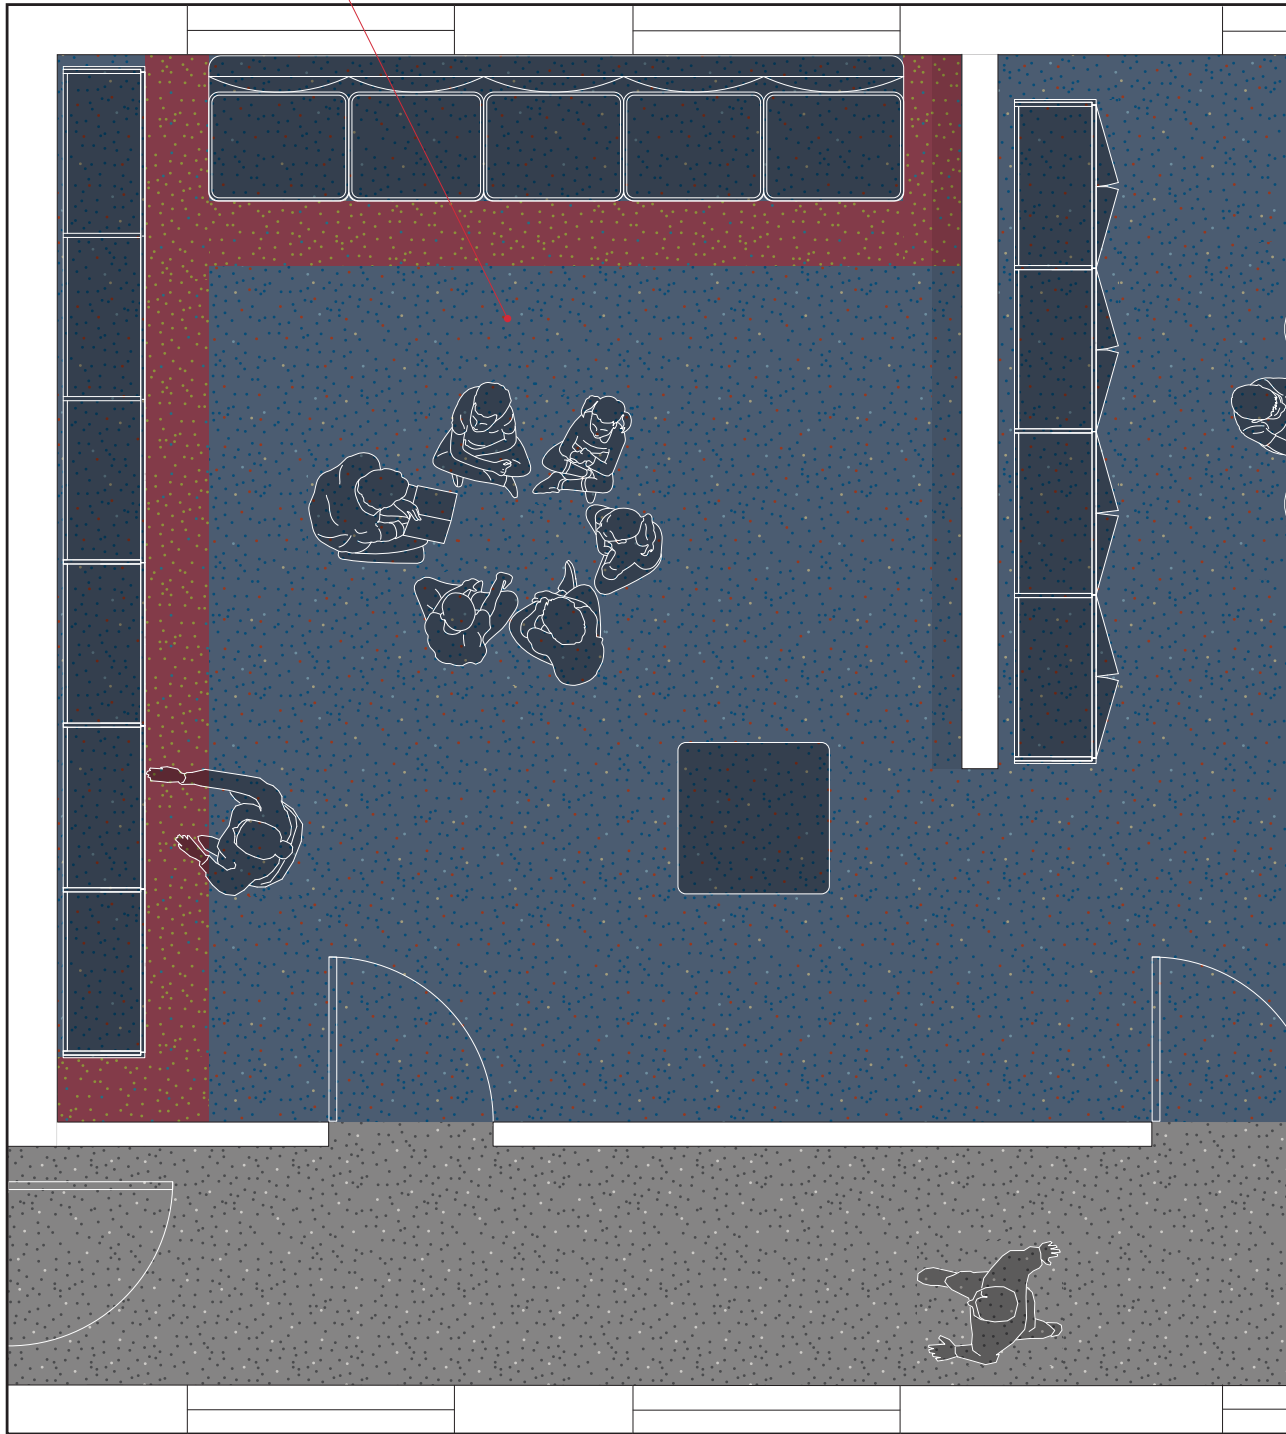

Classroom

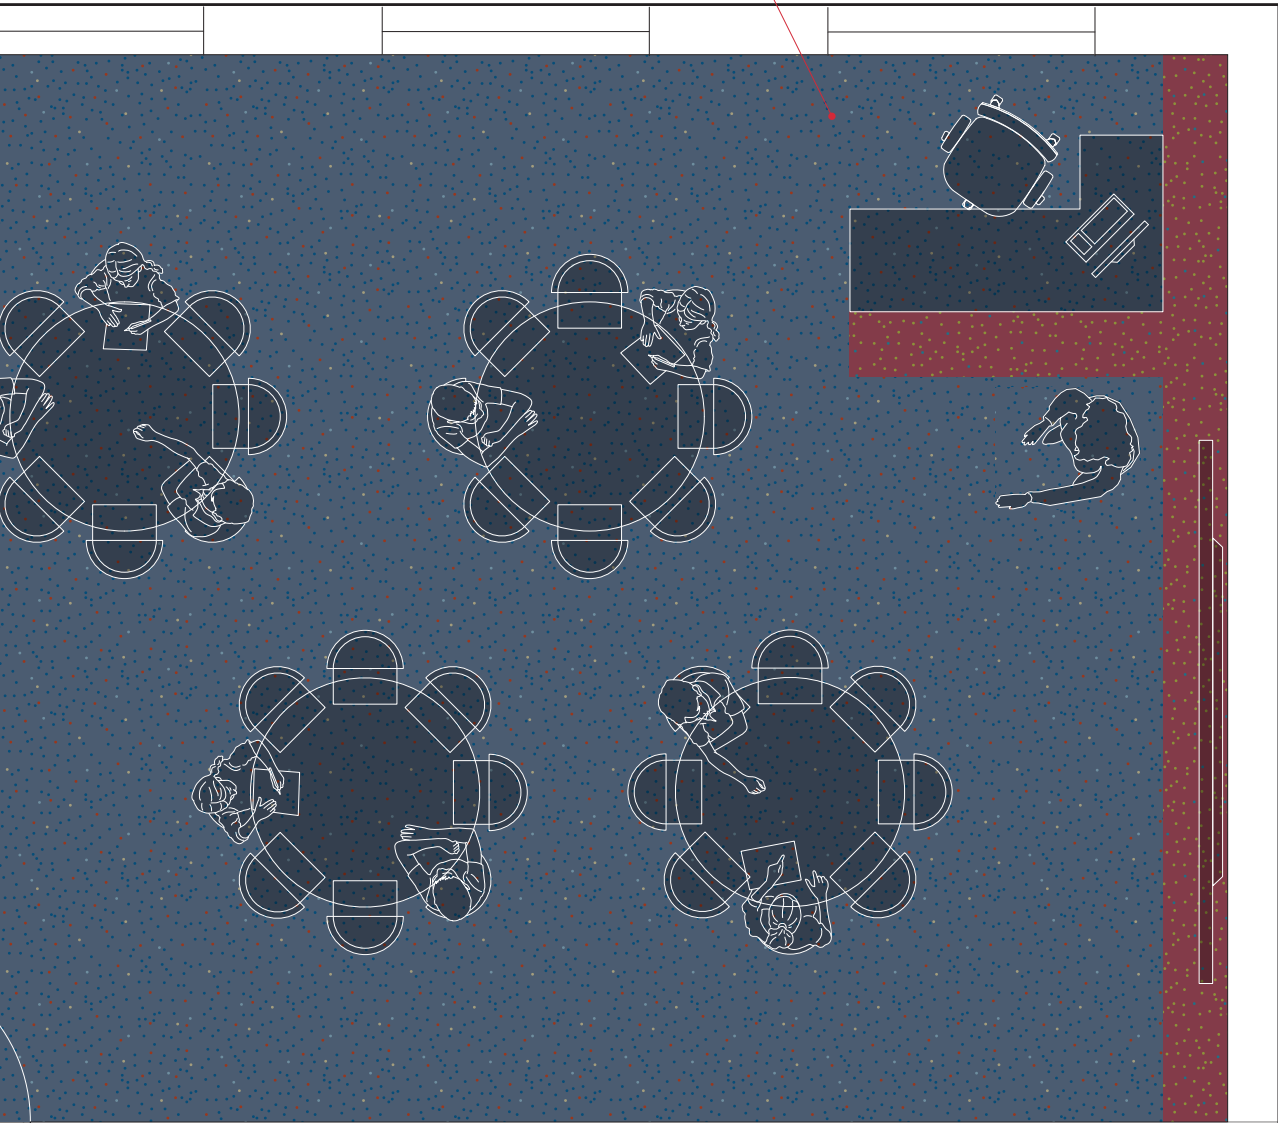

Corridor

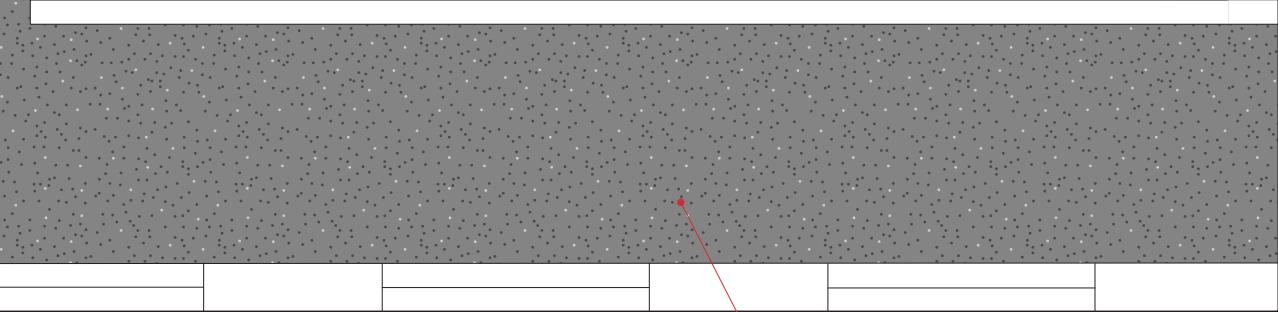

Adventurer
Seafarer 25012



Adventurer
Red Sands 25015




Adventurer
Lunar Gray 25003






COMMERCIAL OFFICE FLOOR PLAN

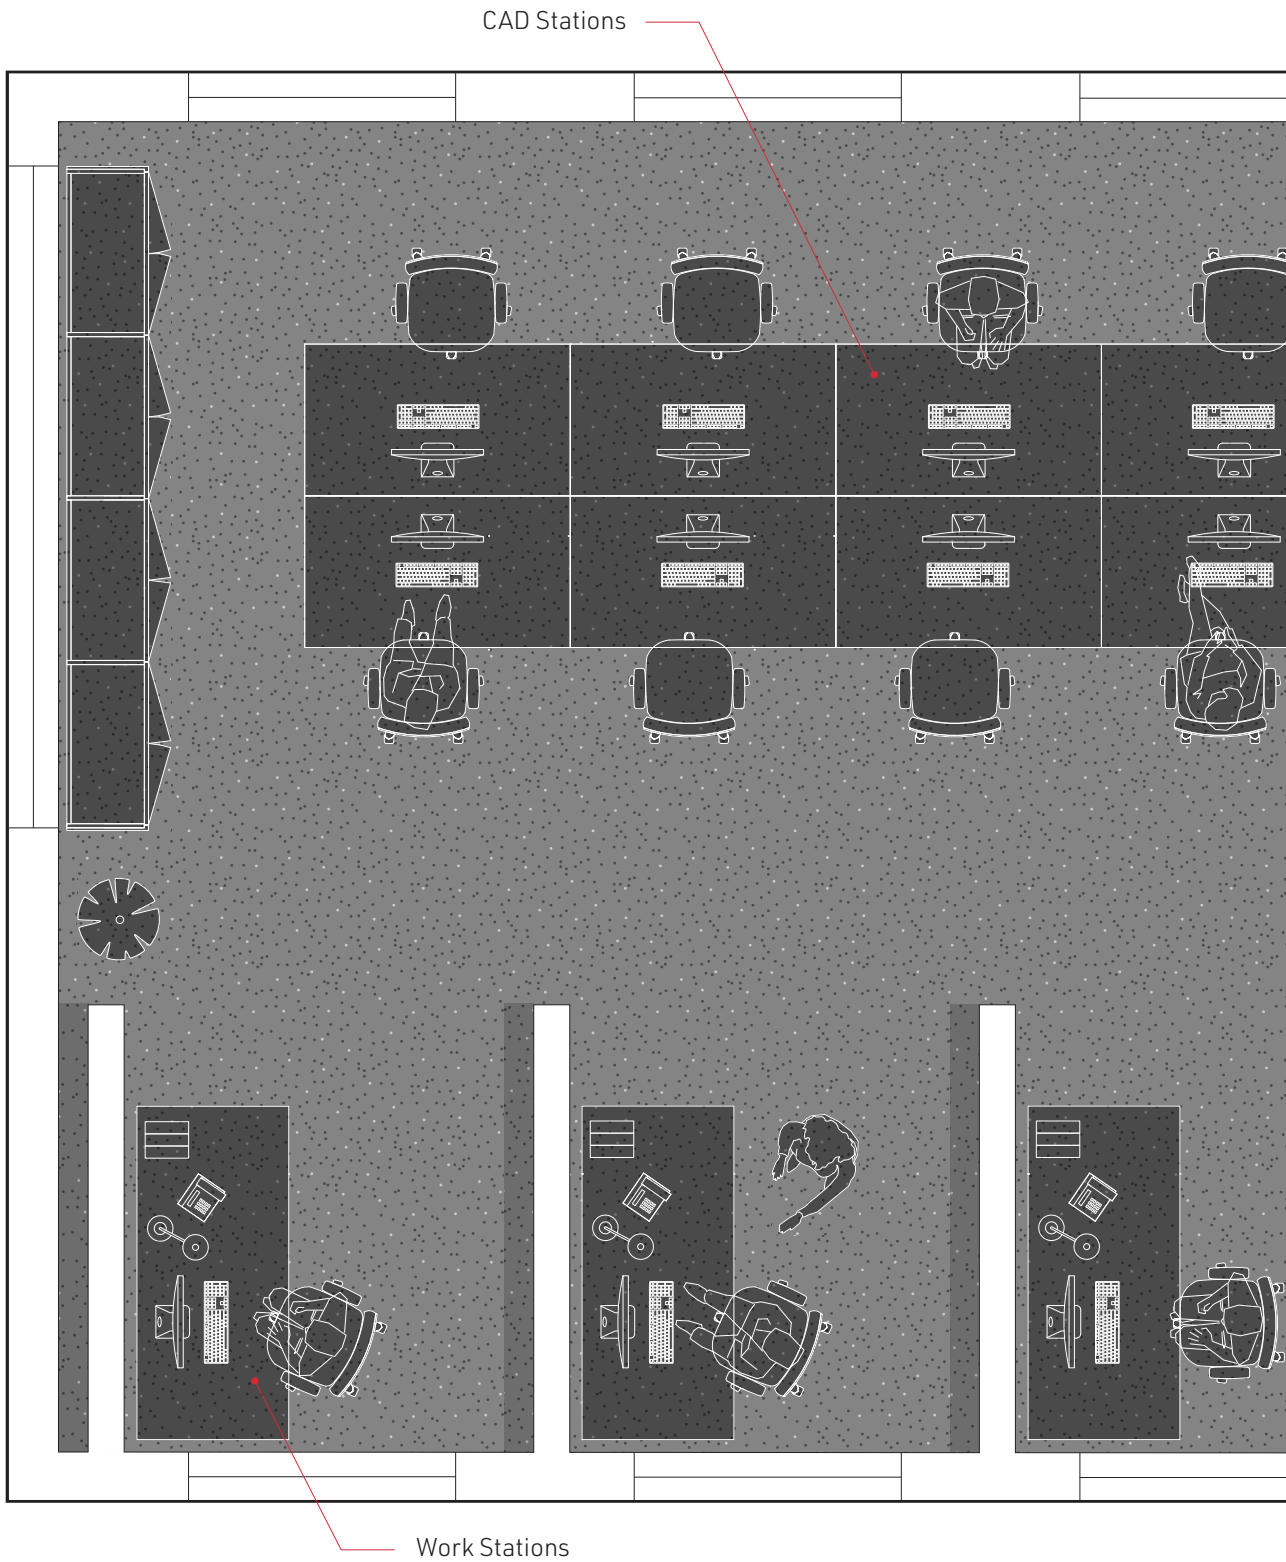

Seating Area

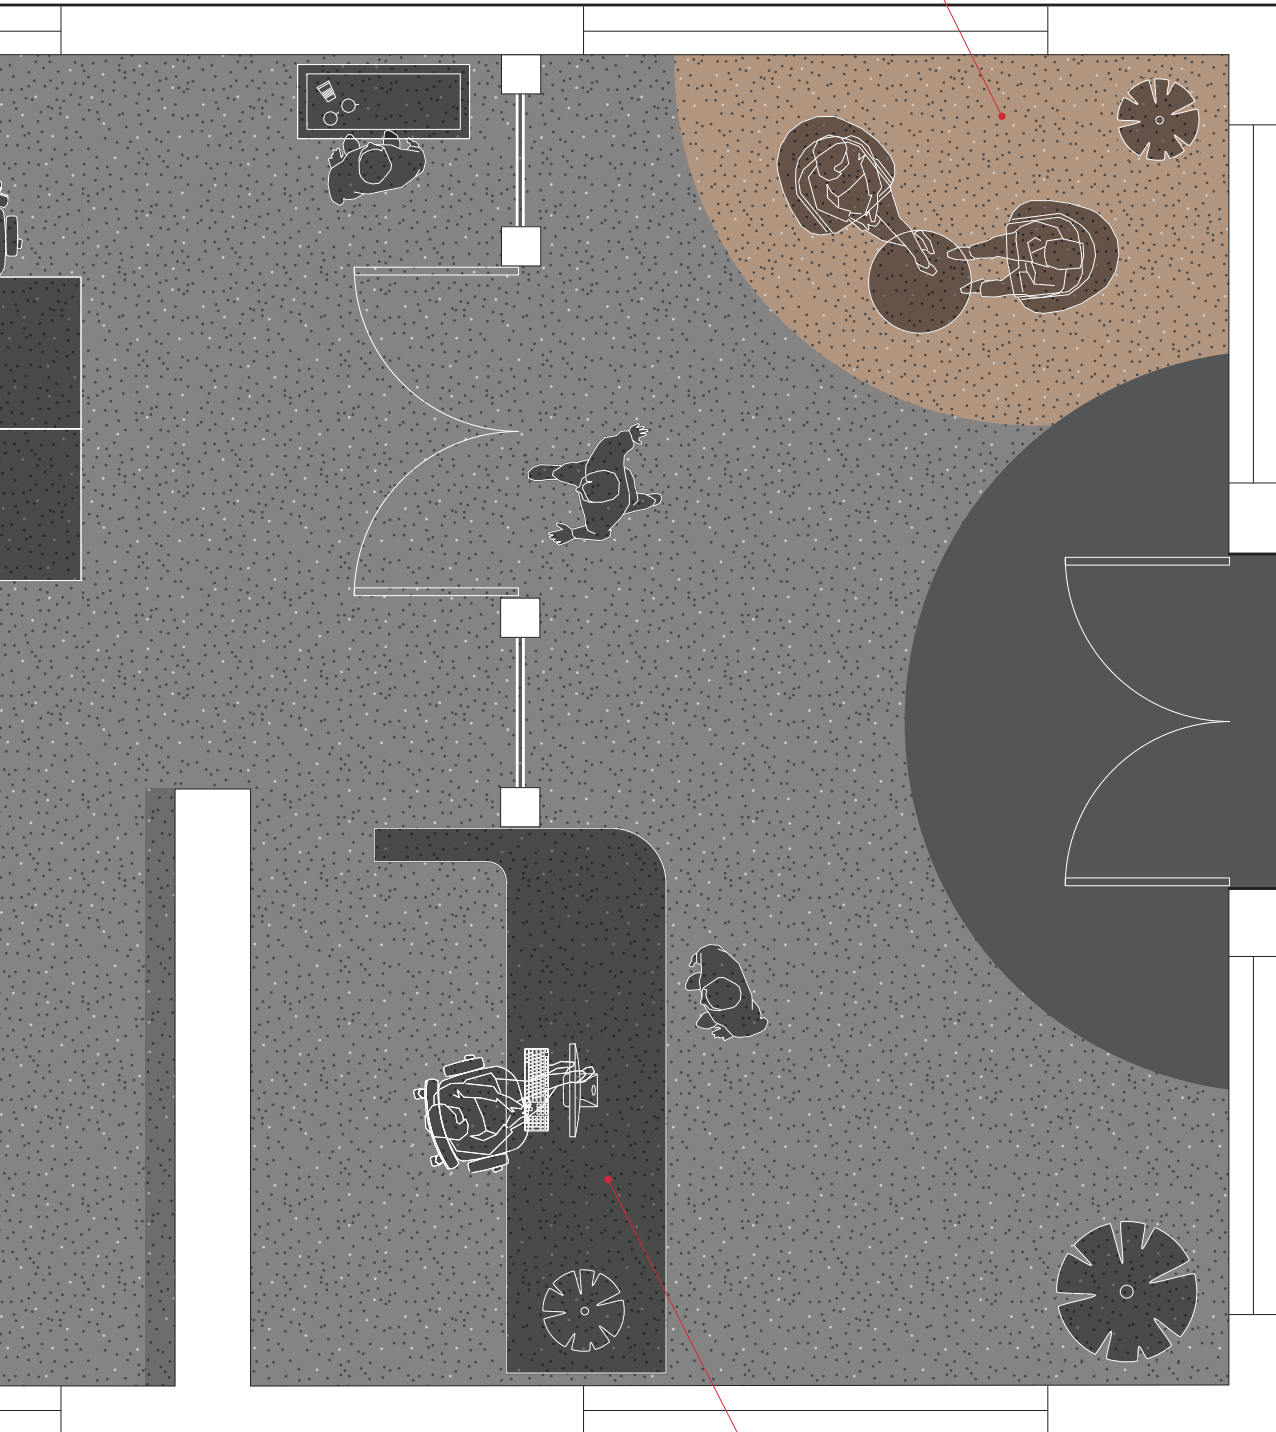

Entrance

Reception



Adventurer
Lunar Gray 25003



Adventurer
Sandstorm 25017



Boulevard 6000
Nickel

ADVENTURER

gerflor.co.uk
gerflor.ie
gradus.com

Uniclass Pr_35_57_11_62
CI/SfB (43) Tn6

ADVENTURER

SPECIFICATION

Product Format	Tile	Pvc Impervious
Product Dimensions	500mm x 500mm	2 metres
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon	100% Solution Dyed Nylon
Total Carpet Weight	4380 g/m ²	4380 g/m ²
Tufted Pile Weight	500 g/m ²	500 g/m ²
Gauge	1/13" (51.2 per dm)	1/13" (51.2 per dm)
Stitches	36.2 per dm	36.2 per dm
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	Pvc
Total Carpet Thickness	6.2mm	6.9mm

PERFORMANCE SPECIFICATION

Classification	Heavy Commercial	Heavy Commercial
Castor Chair BS EN 985 Test A	Pass	Pass
CAMRASO Method E6-1	-	Impermeable
Impact Sound Insulation EN ISO 10140-3	22dB	22dB
Static Electricity ISO 6356	<2kV	<2kV

FLAMMABILITY

BS EN 13501-1	Class Bfl-s1	Class Cfl-s1
---------------	--------------	--------------

WARRANTIES

Wear Warranty	15 Year	15 Year
Anti-static Warranty	10 Year	10 Year
Fade Warranty	5 Year	5 Year

INSTALLATION

Pvc impervious backed carpet has specific installation requirements, visit www.gerflor.co.uk for installation instructions.

ADHESIVES

For recommended adhesives contact Technical Services.



The information contained in this document is valid from 1/4/2023 and is subject to change at any time without notice.

Contact us to order free samples

UNITED KINGDOM:
Gerflor Flooring UK Ltd
Park Green, Macclesfield,
Cheshire, SK11 7LZ
Tel: 01625 428922
E-mail: contractuk@gerflor.com
Visit: www.gerflor.co.uk

IRELAND:
Gerflor Ltd
Ballybay Road, Co. Monaghan,
A81 YD83, Republic of Ireland
Tel: +353 (0) 42 966 1431
E-mail: gerflorirl@gerflor.com
Visit: www.gerflor.ie

Gerflor[®]
theflooringgroup