


STREAMO

MARINE FLOORINGS FOR SHIP INTERIORS



MARINER / MARINER SD

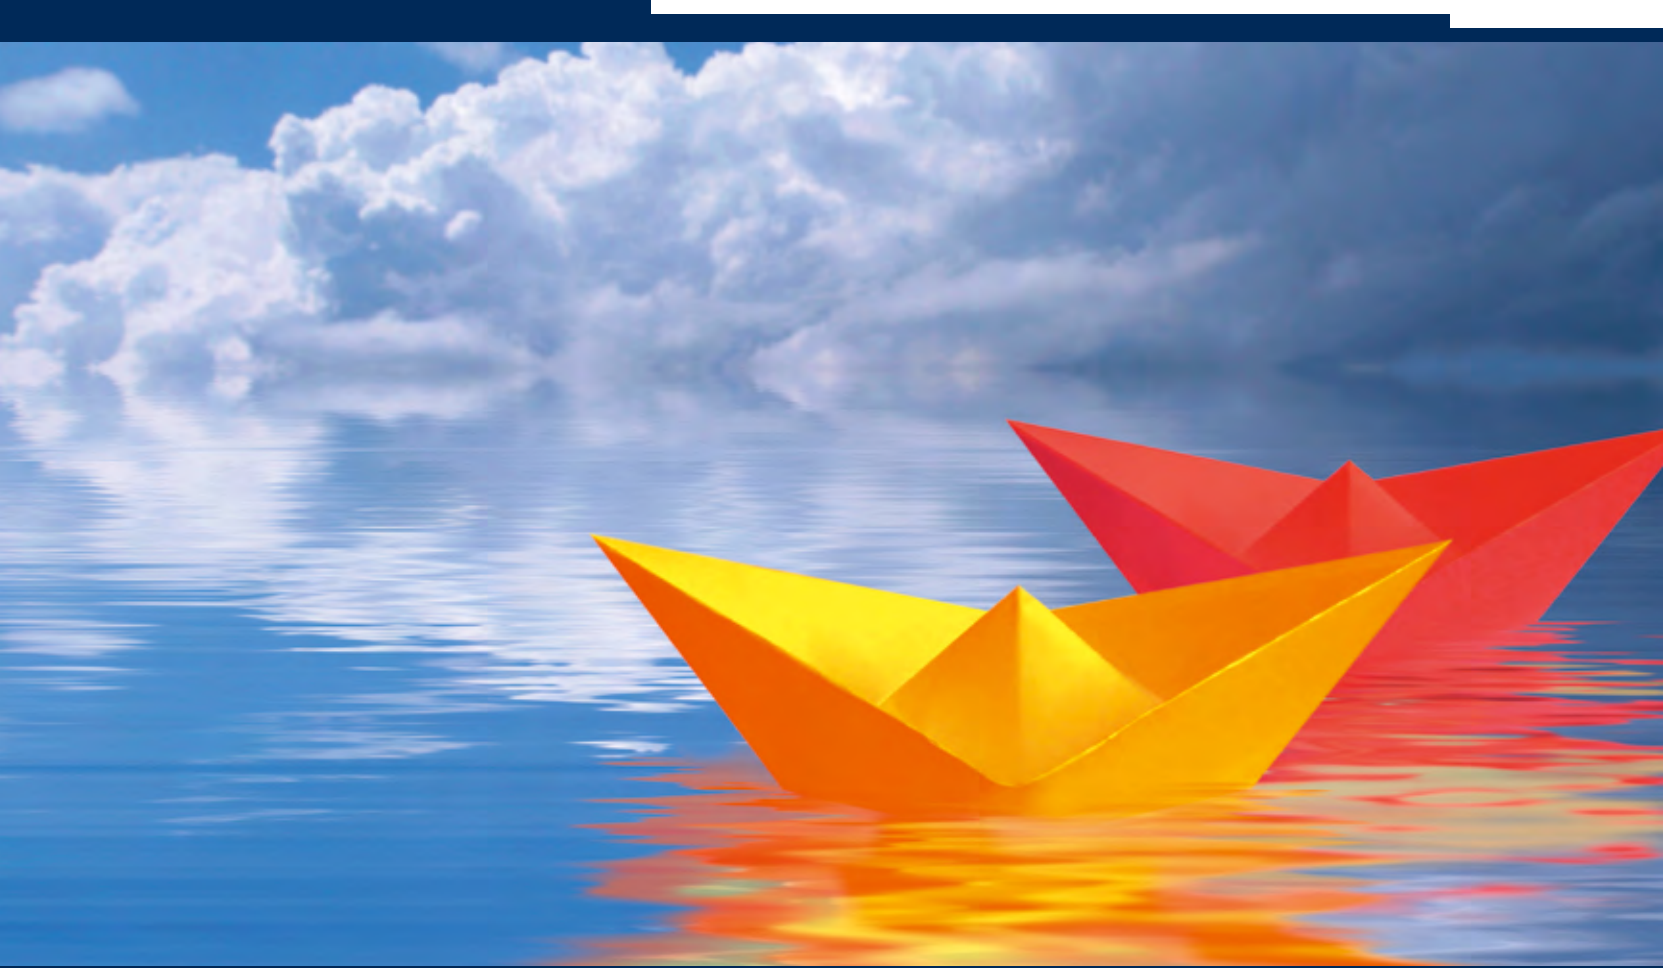

Gerflor[®]
theflooringgroup

STREAMO MARINER / MARINER SD

STREAMO MARINER

- 18 Colors** Directional design
- For medium to heavy duty traffic areas
- Flexible flooring, easy to install & weld
- PUR treated** Ease of maintenance no immediate waxing after installation, except in heavy traffic areas

STREAMO MARINER SD

- ESD** Dissipative, antistatic homogeneous floorcovering, for technical areas such as electronics and telecommunication spaces, computer rooms, medical centers, etc.
- 6 Colors** Directional design




Compliant with IMO regulations



Indoor air quality :
TVOC 100 times below standard
(TVOC < 10 µg/m³ after 28 days)



100% REACH compliant
Free of formaldehyde,
free of heavy metals, free of solvent

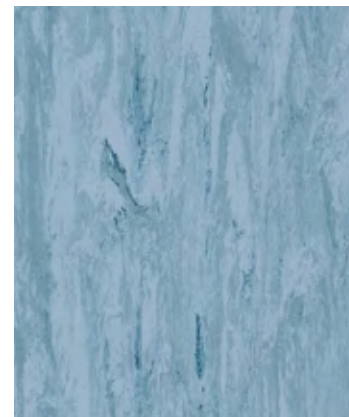

0112 Storm available in **SD** only



0010 Azure




0126 Nordica



0127 Bermuda



0306 Green available in **SD** only

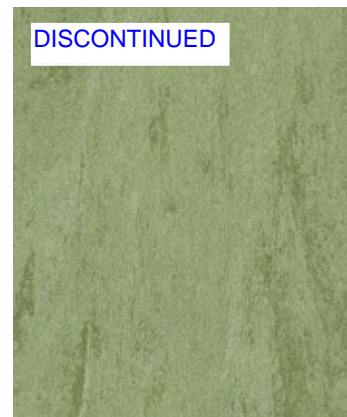

0120 Borneo



0121 Green Leaf



0122 Pineapple

STREAMO MARINER


2 m | 608 x 608 mm | PUR treated | 100% recyclable



0003 Ivory



SD 0014 Brown

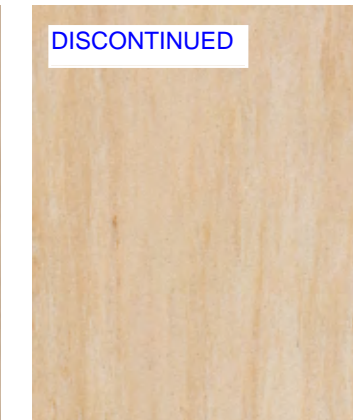

DISCONTINUED
0006 Honey



0016 Sand



0123 Corallo



0124 Tortora




0125 Truffe



0108 Pepper



Finlines

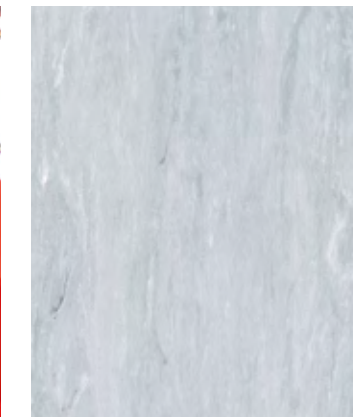

0002 Platinum **SD**



0005 Steel **SD**



0303 Grey



0013 Pewter **SD**

STREAMO MARINER SD

2 m | 608 x 608 mm | 100% recyclable | $10^6 \leq Rt \leq 10^8 \Omega$ (EN 1081)


SD: color also available in SD version (Tiles & sheets).



STREAMO MARINER / MARINER SD

PUR surface treatment
(Streamo Mariner only)

Monolayer homogeneous
calendered flooring

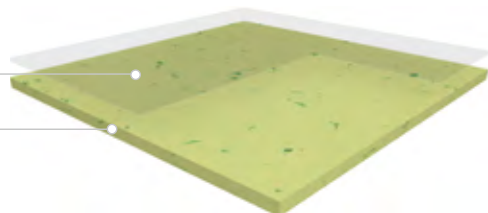

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor.

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available upon request.

STREAMO
MARINER

STREAMO
MARINER SD

DESCRIPTION / DESCRIPTION / BESCHREIBUNG / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

Total thickness / <i>Épaisseur totale / Gesamtdicke / Espesor total / Espessura total / Spessore totale</i>	EN ISO 24346 (EN 428)	mm	2.0	2.0
Weight / <i>Poids / Gewicht / Peso / Peso / Peso</i>	EN ISO 23997 (EN 430)	g/m ²	3300	3300
Width/length of sheet / <i>Largeur/longueur des lés / Rollenbreite/Rollenlänge / Ancho/largo de rollos / Largura/comprimento dos rolos / Larghezza/lunghezza dei teli</i>	EN ISO 24341 (EN 426)	cm/lm	200/20	200/20
Tile size / <i>Format dalles / Format Fliesen / Dimensiones de las losetas / Dimensões dos mosaicos / Dimensione delle piastre</i>	EN ISO 24342 (EN 427)	mm	300 x 300* 608 x 608	608 x 608
Number of tiles per package / <i>Nombre de dalles par boîte / Fliesenanzahl pro Karton / Cantidad de losetas/caja / Quantidade dos mosaicos/caixa / N° piastre per confezione</i>	-	-	50	20
Sqm/Box - <i>m²/boîte - Qm pro Karton/m² - Bullo/m² - Caixa/m² - Confezione</i>	-	-	4.5	7.39

CLASSIFICATION / CLASSIFICATION / KLASSIFIZIERUNG / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/product specification / <i>Norme produit / Produkt Norm / Normas / Normas / Norma prodotta</i>	-	-	EN ISO 10581	
Fire rating / <i>Classement feu / Brandverhalten / Fuego / Fogo / Reazione al fuoco</i>	IMO Resolution	-	MSC 307 (88) Part 5	
			MSC 307 (88) Part 2	
	Maritime Approvals	-	Marine Equipment Directive	
			US Coast Guard	
			Transport Canada SOLAS 74	
Static electrical propensity / <i>Potentiel de charge / Begehaufladung / Comportamiento electrostático / Comportamento electrostático / Potenziale di carica</i>	EN 1815	kV	< 2	< 2
Electrical resistance / <i>Résistance électrique / Elektrischer Widerstand / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica</i>	EN 1081 ⁽¹⁾	Ω	-	10 ⁴ ≤ Rt ≤ 10 ⁸

PERFORMANCE / PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wet Slip resistance / <i>Anti-glissance à l'humide / Rutschverhalten bei Nässe / Resistencia de deslizamiento en mojado / Antideslizamento condições no molhado / Índice di antiscivolosità con superficie bagnata</i>	DIN 51130	class	R9	
Type Binder content / <i>Teneur en agent liant / Bindenmittelgehalt</i>	ISO 10581	type	II	
Dimensional stability / <i>Stabilité dimensionnelle / Maßstabilität / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale</i>	EN ISO 2399 (EN 434)	%	Sheet ≤ 0.40 Tile ≤ 0.25	
Residual indentation / <i>Poinçonnement statique rémanent / Resteindruck / Punzonamiento / Puncamento / Impronta</i>	EN ISO 24343-1 (EN 433)	mm	~ 0.03	
Thermal conductivity / <i>Conductivité thermique / Wärmeleitfähigkeit / Resistencia térmica / Resistência térmica / Resistenza termica</i>	EN ISO 10456 (EN 12524)	W/(m.K)	0.25	
Colour fastness / <i>Solidité lumière / Lichtechtheit / Resistencia a la luz / Estabilidade das cores / Solidità alla luce</i>	EN 20 105 - B02	degree	≥ 6	
Chemical resistance / <i>Résistance aux produits chimiques / Verhalten gegenüber Chemikalien / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici</i>	EN ISO 26987 (EN 423)	-	OK	
Surface treatment / <i>Traitement de surface / Oberflächenvergütung / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie</i>	-	-	PUR	-
TVOC after 28 days / <i>TVOC après 28 jours / TVOC (28 Tage) / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni)</i>	ISO 16000-6	µg/m ³	< 10	

* Upon special request (2000 sqm MOQ) - (1) Measured before installation



Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Skirtings
& Profiles



IMO
adhesive

IMPORTANT:

The information contained in this document is valid from 01/12/2021 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

43, Boulevard Garibaldi
69170 Tarare - France
Tel.: +33 4 74 05 40 00
Fax: +33 4 74 05 06 83
Email: streamo@gerflor.com
www.streamobygerflor.com

Gerflor
theflooringgroup