



*The Original*  
MIPOLAM 1937

**Mipolam Comet**

**Gerflor®**

## We care for the planet



### Circularity

- 100% recyclable



### Eco design

- 57% natural content (Mineral + Recycled)

## We care for the people



### Health & Safety for users

- Anti-bacterial activity
- Phthalate-free



### Indoor Air Quality

- TVOC <math>< 10 \text{ mg/m}^3</math> after 28 days: 100 times below standard (ISO 16000-6)


**we care / we act**

## Mipolam Comet



### Design & Harmony

- 26 colours
- Non directional Design with low contrast



### Perfect finishing

- Color matching welding rods
- Coordinated with Gerflor wall coverings



### Heavy traffic resistance

- Binder content Type I
- Class 34-43



### Easy maintenance

- PUR+ surface treatment




### Maximum hygiene

- Recommended with Gerflor Clean Corner System and entrance mats






# Mipolam Comet

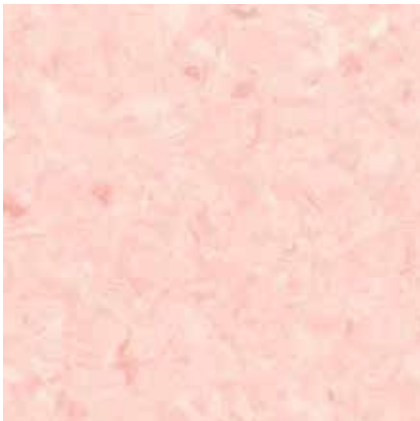

2623 Lovas  
LRV : 52.20 / NCS : 1515-R



2612 Read  
LRV : 14.70 / NCS : 2060-R

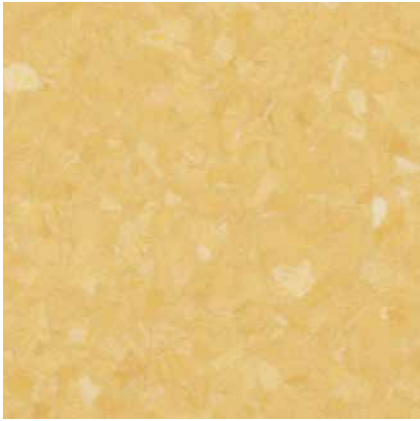

2609 Lemmon  
LRV : 54.20 / NCS : 1030-Y30R



2619 Ory  
LRV : 68.70 / NCS : 1005-Y50R



2608 Hill  
LRV : 21.30 / NCS : 3040-Y70R




2610 Neat  
LRV : 33.10 / NCS : 3020-Y50R



2600 Biela  
LRV : 61.10 / NCS : 1505-Y30R



2603 Cineos  
LRV : 32.30 / NCS : 3500-N

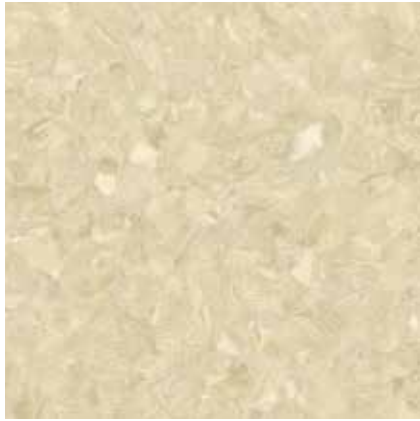


2601 Brooks  
LRV : 47.10 / NCS : 3005-Y20R



2602 Catalina  
LRV : 54.80 / NCS : 2002-Y



2616 Helin  
LRV : 40.30 / NCS : 3005-Y50R

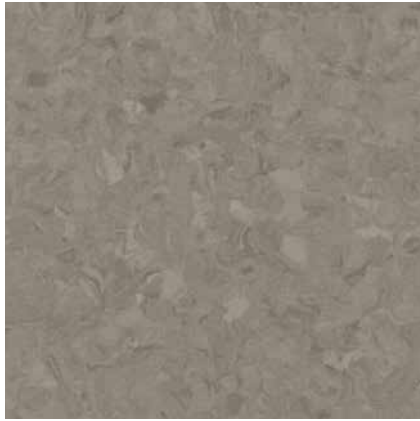

2615 Linear  
LRV : 25.30 / NCS : 5005-Y50R



2622 Wise  
LRV : 66.80 / NCS : 1002-Y




# Mipolam Comet




2613 Halley  
LRV : 67.60 / NCS : 1500-N




2614 Larson  
LRV : 46.20 / NCS : 2502-B

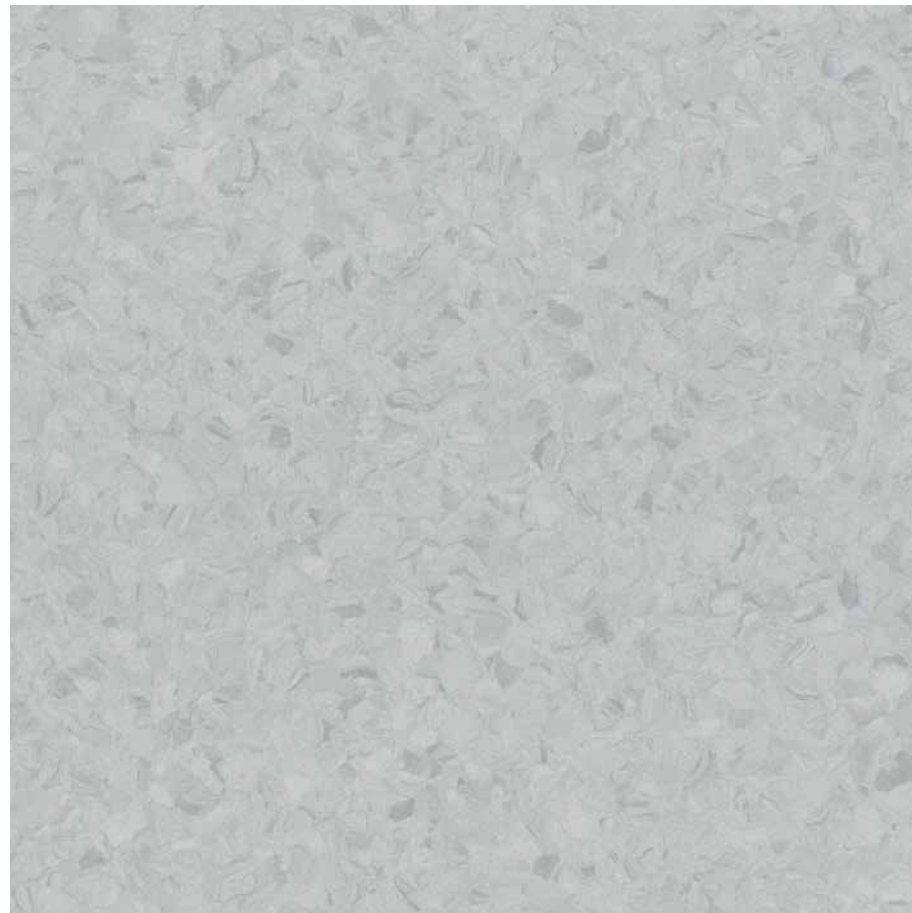

2618 Soho  
LRV : 53.00 / NCS : 2002-B

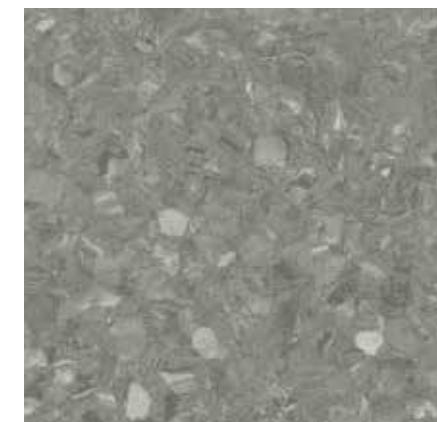

2604 Wolf  
LRV : 24.30 / NCS : 5000-N

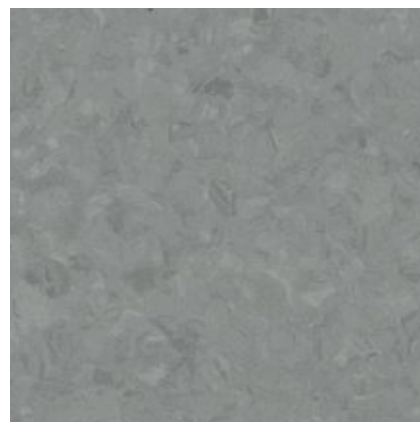


2620 Panstarrs  
LRV : 28.20 / NCS : 4502-B




2624 Tempel  
LRV : 46.70 / NCS : 2502-B



2607 Spacewatch  
LRV : 17.70 / NCS : 4030-R90B

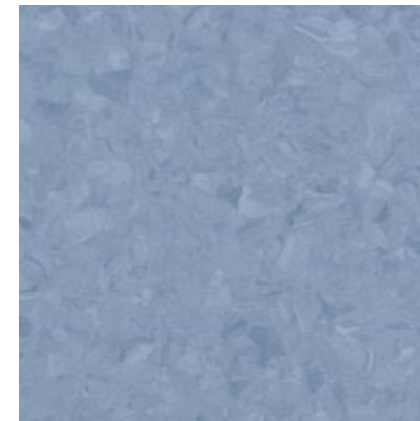


2606 Finlay  
LRV : 33.60 / NCS : 3020-R90B

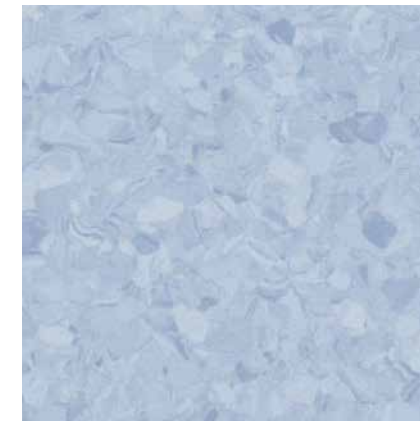

2617 Skiff  
LRV : 52.60 / NCS : 1515-R90B




2611 Tritton  
LRV : 49.80 / NCS : 1515-B20G

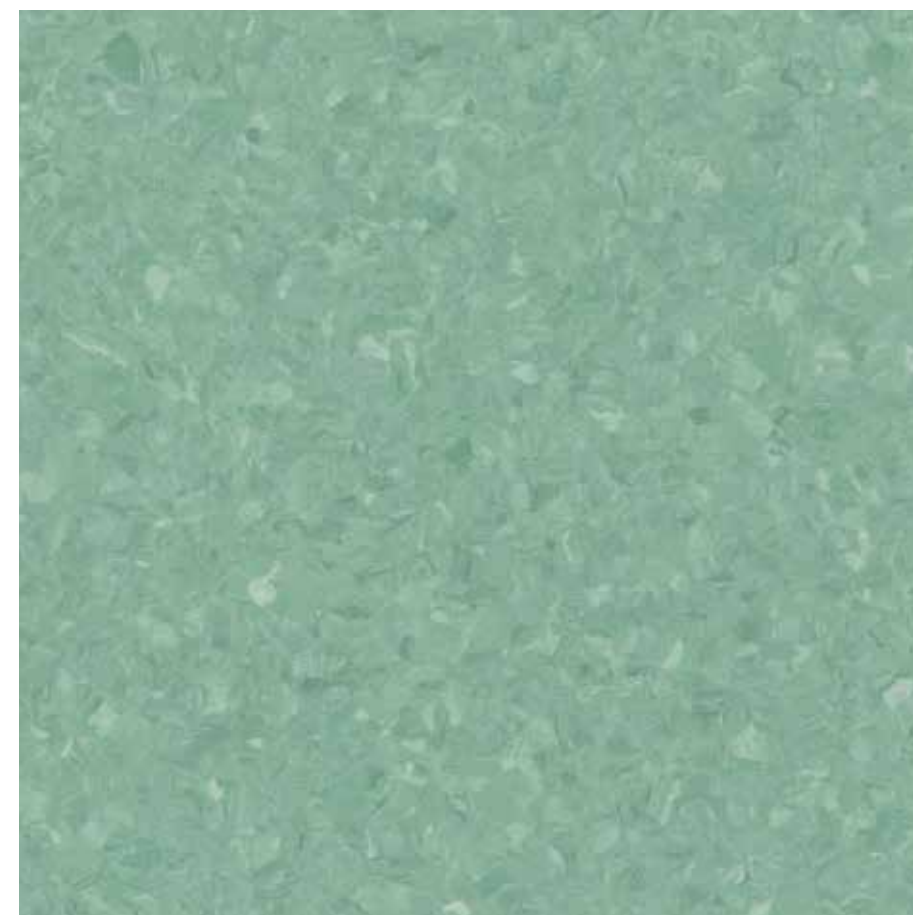

2625 Iras  
LRV : 38.70 / NCS : 2020-B90G



2605 Clark  
LRV : 39.70 / NCS : 2020-G30Y

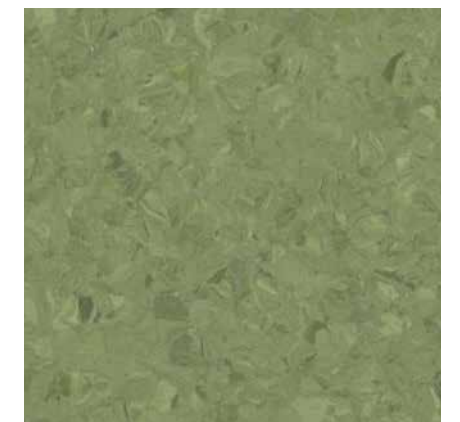

2621 Wild  
LRV : 25.60 / NCS : 4020-G50Y

## Mipolam Comet

### Description

Total thickness	EN ISO 24346	mm	2.00
Weight	EN ISO 23997	g/sq.m	2950
Width of sheet	EN ISO 24341	cm	200
Length of sheet	EN ISO 24341	lm	20
	-	sq.m	40

### Classification

Norm/product specification	-	-	EN ISO 10581
European classification	EN ISO 10874	class	34 - 43
	EN 13501-1	class	Bfl-s1
Fire rating	ASTM E648	class	Class I
	EN 1815	kV	< 2

### Performances

Type binder content	EN ISO 10581	type	I
Dimensional stability	EN ISO 23999	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance <sup>(1)</sup>	EN ISO 26987	class	OK
Anti-bacterial activity after 24h (E.coli - MRSA) <sup>(2)</sup>	ISO 22196	-	> 99% inhibits growth

### Environment / Indoor Quality Air

TVOC after 28 days	ISO 16000-6	microgram/m <sup>3</sup>	< 10
--------------------	-------------	--------------------------	------

### CE marking



EN 14041

-



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.  
 (2) The implementation of an effective cleaning method is the best defense against infection

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

**!** Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

**IMPORTANT:** The information contained in this document is valid from 01/06/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

Product description and technical data sheets on [gerflor.com](http://gerflor.com)

## We care / we act Our Commitments for a Sustainable future

 <b>CARBON FOOTPRINT*</b> -20 % kg CO <sub>2</sub> equivalent/m <sup>2</sup> between 2020 and 2025	 <b>BIOSOURCED CONTENT**</b> 10 % by 2025	 <b>RECYCLED CONTENT</b> 30 % by 2025	 <b>ADHESIVE FREE***</b> 35 % by 2025	 <b>ANNUAL VOLUME RECYCLED</b> 60 000 t by 2025
---	--	--	--	--



\* Scopes 1 and 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity - adhesive free solution