


# YOUR CREATION. OUR GUARANTEE.<sup>SM</sup>



**GERFLOR CREATION LVT** is a 2.5mm thick, high-end commercial grade flooring available in both plank and tile format. Realistic wood, stone and textile designs are printed in high definition on tear-resistant film. Protected by a durable 28 mil transparent wearlayer and supported by a very high density (VHD) compact interlayer, Creation is engineered for high traffic resistance. Creation is naturally antibacterial and 99% effective against the spread of infection by ISO 22196 standards. The PUR+ Surface Treatment allows for easy maintenance in addition to beveled edges that reduce dirt buildup.

A 100% recycled backing provides a stable, sustainable foundation for excellent product performance. Creation is FloorScore<sup>TM</sup> certified, low VOC (TVOC after 28 days < 100 µg/m<sup>3</sup>), 100% allergen-free, and REACH compliant.

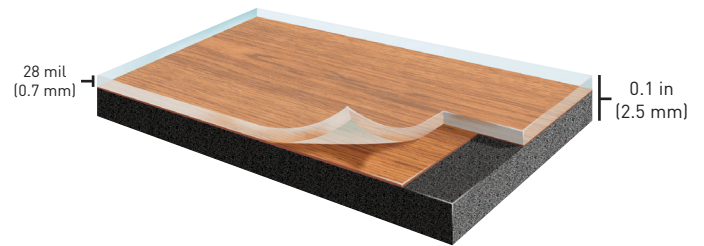

## PLANKS



0357 PORTOBELLO



0568 FARGO



0561 CARASSI



0064 GRAVITY DARK



0117 PEPPERCORN




0573 LAWSON




0360 DEEP FOREST



0554 COLOMBUS



0572 CARRINGTON



0110 ROSEWOOD ALMOND




0359 WILD OAK




0340 BUXTON OAK



0265 WALNUT



0541 FLAMINGO



0096 NAPA



# PLANKS



0093 LARCH



0545 SERENA



0335 SYCAMORE



0556 CLIFTON



0552 TANAMI



0576 OCEANSIDE



0535 DOUGLAS



0538 MIDWEST



0329 LIMED OAK

# TILES



0515 KALBARI



0402 GREENWICH



0709 BARMA COSY



0021 BARMA SWEET



0023 BARMA MYSTERY



0531 HALIFAX



0529 SOMERSET




0085 DOCK GREY




0600 LAVA MOKA




0967 LAVA GREY




0966 LAVA LIGHT



0126 LAVA BONE



0124 TRAVERTINE TAUPE



0414 TRAVERTINE STONE

# YOUR CREATION. OUR GUARANTEE.<sup>SM</sup>



DESCRIPTION	STANDARDS	REQUIREMENTS	PLANKS & TILES
<b>PRODUCT DESCRIPTION</b>			
Reference Specification	ASTM F1700	-	Class III Type B
Gauge Total Thickness	ASTM F386	-	0.1" (2.5 mm)
Wearlayer Thickness	ASTM F410	-	28 mil (0.7 mm)
Surface Treatment / Maintenance	-	-	PUR+
Backing	ASTM F1303	-	100% recycled material
Plank and Tile Sizes	-	-	4" x 36"; 6" x 36"; 9" x 36"; 18" x 36"; 7.244" x 48"; 7.244" x 54"; 18" x 18"; 19.69" x 19.69"; 24" x 24"; 12" x 24"; Mix: 3", 6", 9" x 36"
Weight	-	-	0.9 lbs/ft <sup>2</sup> (4.4 kg/m <sup>2</sup> )
<b>PERFORMANCE</b>			
Static Load (250 psi)	ASTM F970	≤ 0.005"	Meets Requirements
Indentation - Residual (75 lbs)	ASTM F1914	≤ - 8%	< -0.003" [-3%] Meets Requirements
Coefficient of Friction	ASTM D2047	-	0.65 (Dry)
Dimensional Stability	ASTM F2199	< 0.02"	Meets Requirements
Flexibility	ASTM F137	> 1.5"	Meets Requirements
Chemical & Stain Resistance (5 min and 24 hours)	ASTM F925	-	Meets Requirements
Impact Insulation Class (IIC)	ASTM E989 (ASTM E492)	-	40 dB
Fire Rating	ASTM E648	Class I	Class 1
Smoke Density (Flaming and Non-Flaming)	ASTM E662	-	Meets Requirements
<b>ENVIRONMENT HEALTH &amp; SAFETY</b>			
Naturally Bacteriostatic: Combats MRSA, E. coli, and S. aureus*	ISO 22196	-	Inhibits spread of infection at 99%
Allergen-Free	-	-	100% Allergen-Free
Plant Certifications	-	-	ISO 14001, ISO 9001
Production Waste	-	-	100% Manufacturing Waste Recycled
End of Life	-	-	100% Recyclable
<b>MATERIALS &amp; RESOURCES: BUILDING PRODUCT DISCLOSURE &amp; OPTIMIZATION (BPDO)</b>			
Sourcing of Raw Materials: Recycled Content	MR 4 LEED v3	-	35%
	Sourcing LEED v4		
Restriction of Harmful Chemicals	Materials LEED v4	-	100% REACH Compliant
Environmental Product Declaration (EPD)	EPD LEED v4	-	Product-Specific Type III EPD
Health Product Declaration (HPD)	Materials LEED v4	-	Self Declared
<b>MATERIALS &amp; RESOURCES: INDOOR ENVIRONMENTAL QUALITY (IEQ)</b>			
Indoor Air Quality / Low Emitting Materials	IEQ 4.3 LEED v3	-	FloorScore® Certified
	IEQ Option 1 LEED v4		
TVOC after 28 days	ISO 16000-6	-	<100 µg/m <sup>3</sup>
<b>WARRANTY</b>	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on gerflorusa.com.		

\*The implementation of an effective cleaning method is the best defense against infections.

FORMAT OF PLANKS / TILES		NUMBER OF UNITS PER BOX	COVERAGE PER BOX		WEIGHT/ BOX	
CM	INCH		SQ M	SQ FT	KG	LBS
10.16 x 91.44	4" x 36"	36	3.34	35.95	13.36	29.45
15.2 x 91.4	6" x 36"	24	3.34	35.95	14.86	32.76
18.4 x 121.9	7.244" x 48"	15	3.37	36.28	15.35	33.84
Mix: 7.6 / 15.2 / 22.8 x 91.4	Mix: 3" / 6" / 9" x 36"	24	3.34	35.95	14.86	32.76
18.4 x 137.1	7.244" x 54"	12	3.03	32.62	13.70	30.20
22.8 x 91.4	9" x 36"	16	3.34	35.95	15.00	33.07
45.7 x 91.4	18" x 36"	8	3.34	35.95	14.97	33.00
50 x 50	19.69" x 19.69"	14	3.5	37.67	15.25	33.62
61 x 61	24" x 24"	9	3.34	35.95	15.26	33.64
30.5 x 61	12" x 24"	18	3.34	35.95	15.27	33.66
45.7 x 45.7	18" x 18"	16	3.34	35.95	15.70	34.61



NO heavy metals,  
CMR 1, or CMR 2

